


Considering productivity improvements from the perspective of components.

HP

HIGH PRODUCTIVITY

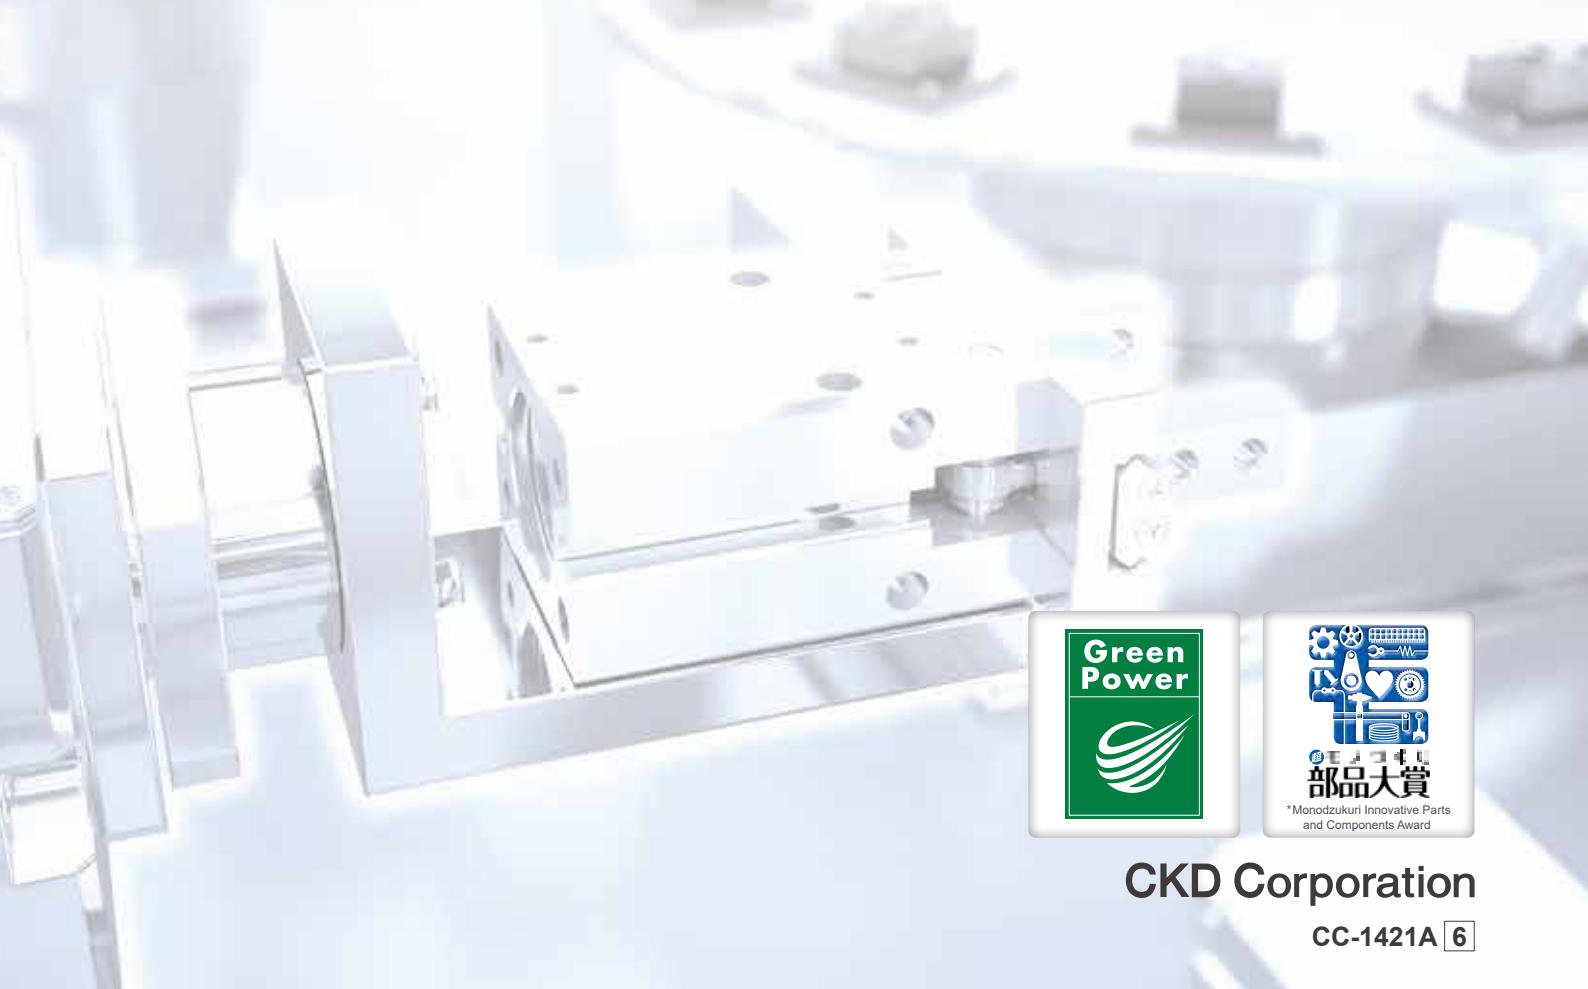

CKD Corporation

CC-1421A 6

Carbon neutral comes from the reduction of CO₂

emissions due to long service life products

What "HIGH PRODUCTIVITY" means to CKD

Lower productivity will result in loss. In addition, parts requiring maintenance will be wasted. We believe that achieving high productivity without maintenance leads to carbon neutrality. HP Series emphasizes that type of manufacturing, one that originates from the perspective of components. Improving productivity in high-frequency, stressed-environment processes, these unprecedented long service life products contribute to "production facilities that never stop" and "stable operation".



Green power
Collaborative Robot Grippers are manufactured with
100% RENEWABLE ENERGY
(Certified by Green Power)



HIGH PRODUCTIVITY SERIES

**Optimized sliding parts
Does not break even with
high frequency usage**

Long service life cylinder


HP1 Series

Greatly reduces unexplained stops

Greatly reduces replacements

Service life over 20 million cycles

Subject to CKD prescribed conditions

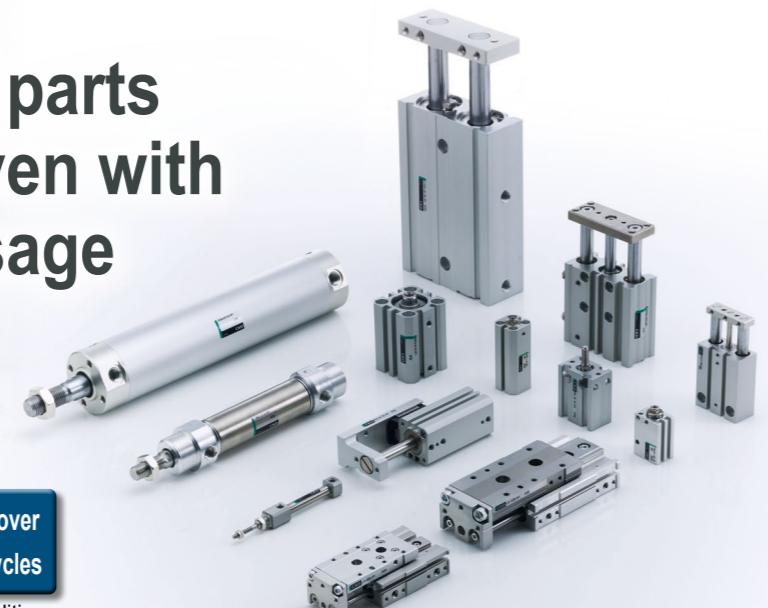

**Improved environmental resistance
Does not break even in
dusty environments**

Environment resistance cylinder

G-HP1 Series

Greatly reduces unexplained stops

Greatly reduces replacements

Improved environmental resistance

Durability over 5 million cycles

Subject to CKD prescribed conditions



Long service life

By optimizing packing design/seal functions and adopting grease supporting high frequency use, a long service life has been achieved with the same dimensions as conventional products.


Abrasion-resistant packing due to special compounding

Adopted grease supporting high-frequency usage

Optimized sealing function



Operational cycle

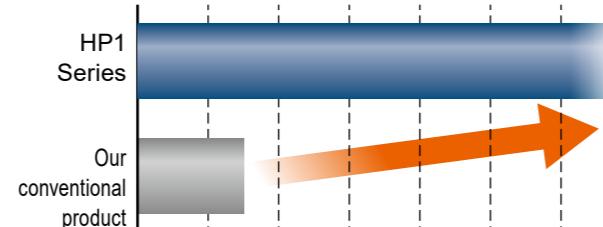


4x
or more
previous
models

*The durability of the HP Series is the service life under our specified conditions. As it differs under working conditions or ambient environment, it is not guaranteed to be more than 4 times under all conditions.

Stable operation

The optimum structure of the sliding parts prevents the starting pressure from rising even in repeated operational cycles. As the starting pressure is constant, the operating time is also constant. Provides stable operation without unexplained stoppages.

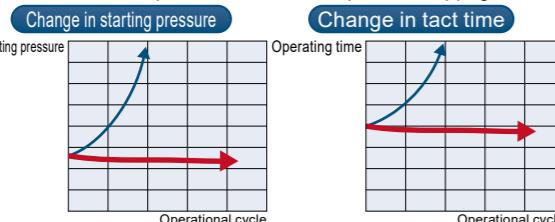


Select switches with bend-resistant wires.

We offer switches that use bending-resistant lead wires that do not easily break even when used in moving parts. (Switch model No. T2HR3, T2VR3, F switches)






Same dimensions as conventional products

As it has the same dimensions as conventional products, it can be used as a replacement without changing the design or modifying the equipment.

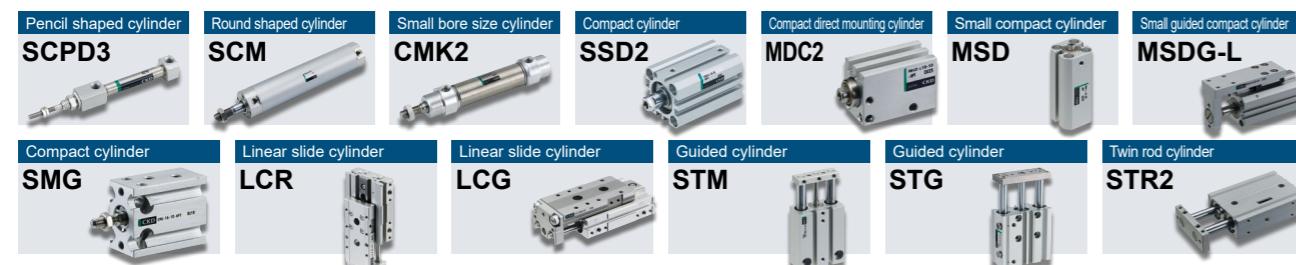

Long service life even in harsh environments

Equipped with a heavy duty scraper and lube keeper to prevent intrusion of dust and to maintain lubrication. Durability in dusty environment has been greatly improved.

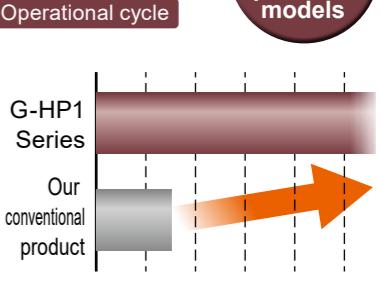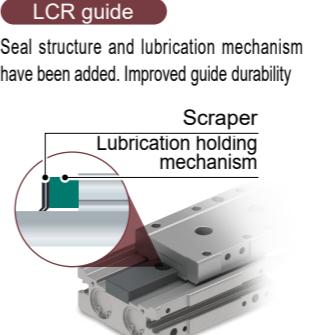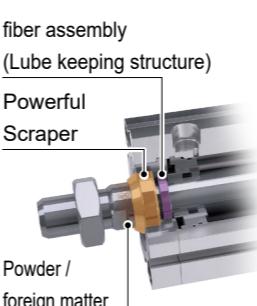

4x
or more
previous
models

*The durability of the HP Series is the service life under our specified conditions. As it differs under working conditions or ambient environment, it is not guaranteed to be more than 4 times under all conditions.


Stable operation even in harsh environments

Tests are carried out in recreated dust environments.


Durability has been confirmed through rigorous testing.

[Test conditions]

Working pressure	0.5 MPa
Dust type	5 to 75 µm
Dust quantity	1.5g twice per day
Number of dustings	2 times/day
Load	No

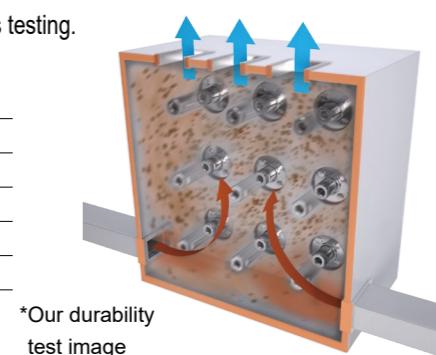

LCR Table deflection change

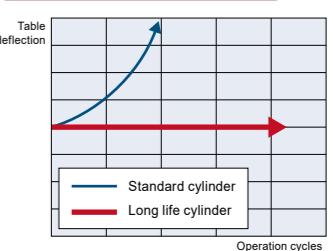

HIGH PRODUCTIVITY SERIES

Increased linear guide rigidity
Achieves high rigidity, high precision,
and high durability

Linear Slide Hand

LSH-HP1 Series

Greatly reduces
unexplained stops

Greatly reduces
replacements

Significantly reduces
replacement time

Service life over
20 million cycles

Subject to CKD prescribed conditions



Grips and measures simultaneously
Can be replaced before breakdowns

Measuring hand

LSHM-HP2 Series

Momentary
stops greatly
reduced

Number of
replacements
greatly reduced

Predictive
maintenance

Service life over
20 million cycles


Subject to CKD prescribed conditions



High rigidity

Increased amount of overhang


The guide rigidity has been improved compared to the conventional products, significantly increasing the allowable moment. It has high rigidity to suppress the occurrence of backlash and to maintain high accuracy for a long time.

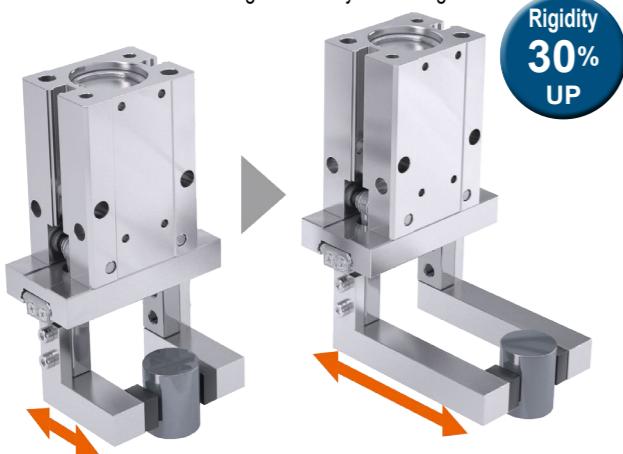

High precision

Repeatability ± 0.01 mm



High rigidity and high precision are achieved with a structure integrating the guide rail and finger.

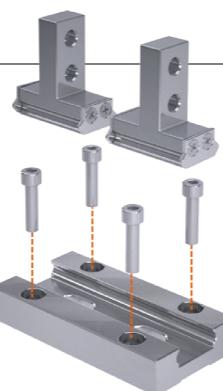

Significant reduction in replacement time


High precision positioning hole ± 0.025 mm

The addition of "positioning holes" with the grip center as reference allows the centering precision to be easily reproduced.

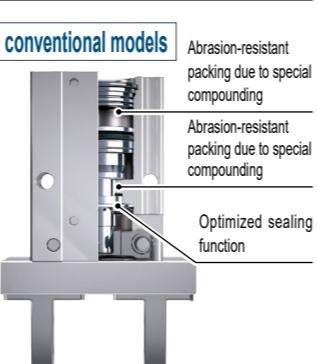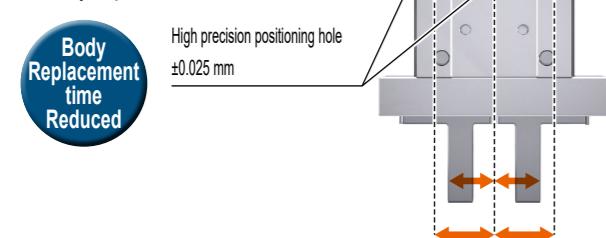


Rail plate system adopted

The rail plate allows switch replacement while the hand is attached to the robot or equipment.

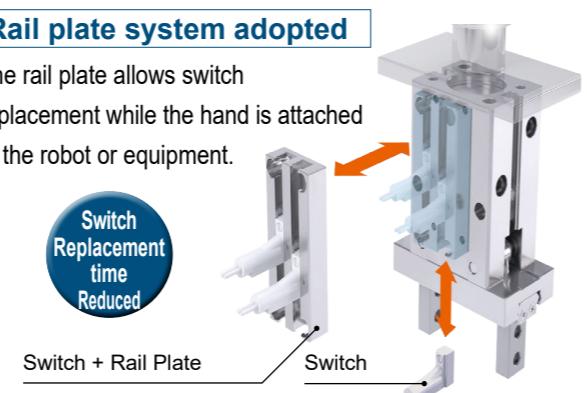

Integrated structure

Finger positioning with high precision analog output. The hand body has a built-in stroke detection sensor and amplifier. The integrated structure achieves high-precision.

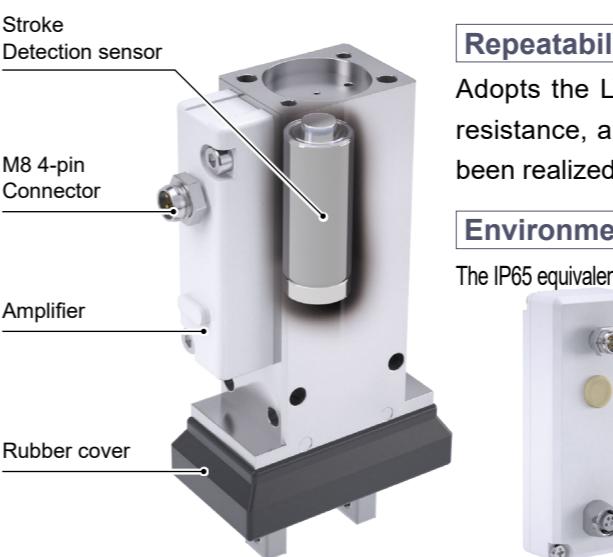

Repeatability ± 0.02 mm

Adopts the LVDT system sensor with excellent vibration and shock resistance, and is integrated. An unprecedented high repeatability has been realized by adopting a structure.

Environmental resistance

The IP65 equivalent amplifier and rubber cover prevent the ingress of cutting chips and water drops.

Linearity correction adapter

Linearity F.S. $\pm 0.5\%$



With correction adapter: F.S. $\pm 0.5\%$

Without correction adapter: F.S. $\pm 3\%$

A correction adapter is adopted to improve the linear accuracy.

Predictive maintenance

Monitors attachments for abnormal wear and deformation of fingers and jigs through changes in output to prevent equipment and robot damage.

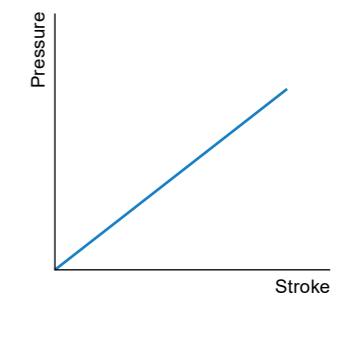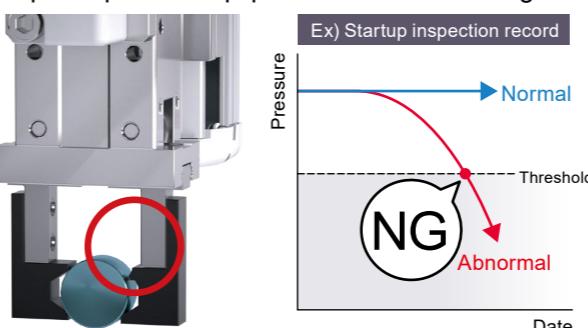

Elimination of human error

All strokes are output in detail, eliminating manual adjustment error as caused by conventional switches.

HIGH PRODUCTIVITY SERIES

Measuring hand
LSHM-HP2 Series


Switch output adapter



Easy setting


The operating range and output pattern can be easily selected with the rotary switch. Troublesome cylinder switches for adjustment work are not required. A fine operation range can also be selected with the high precision sensor.

Image of operation detection

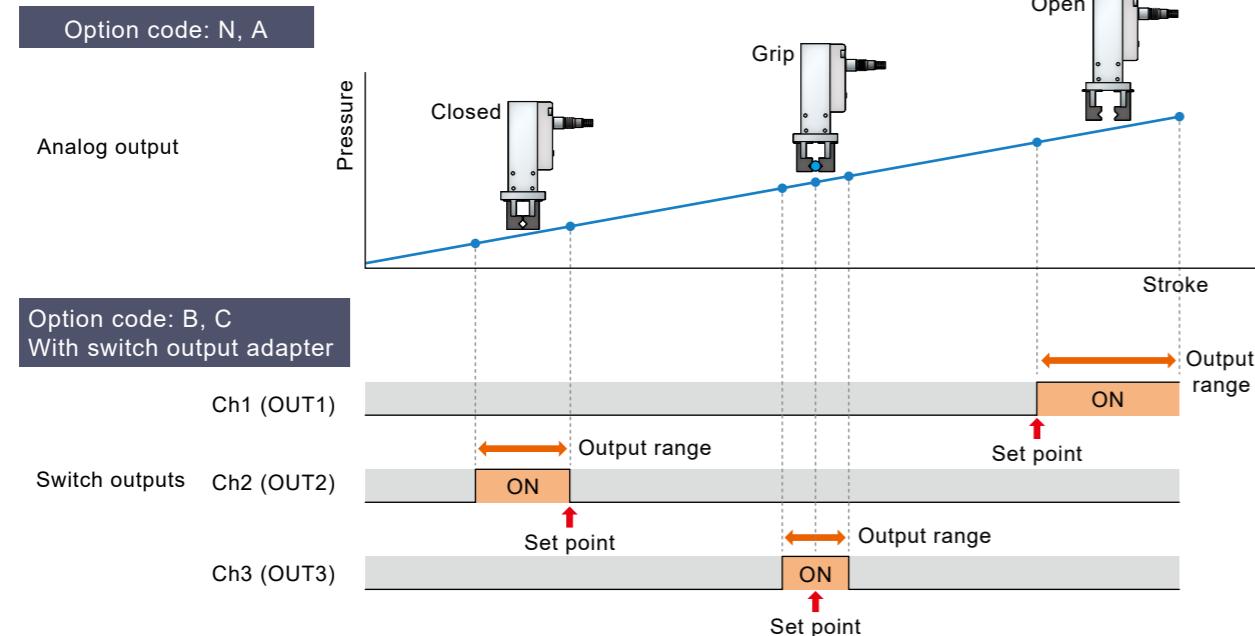

Workpiece foreign object judgment

Grips and measures simultaneously, reducing the number of inspection steps.

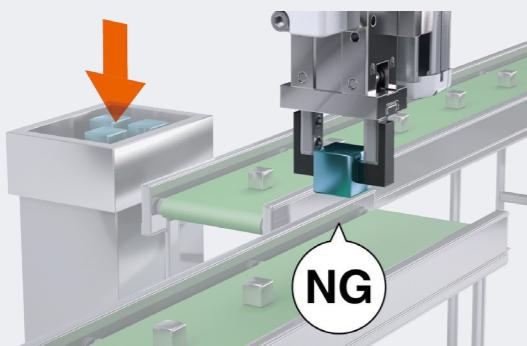


Workpiece model judgment

Capable of instantaneously judging minute differences in workpiece models.




IO-Link adapter

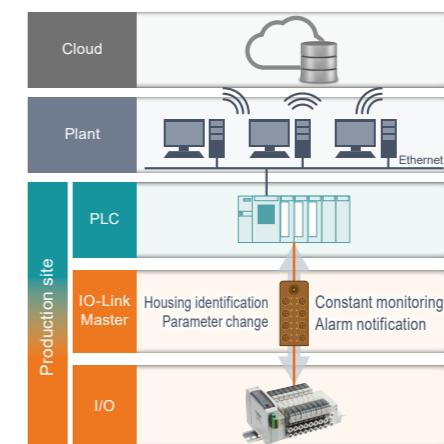


- Constant monitoring with digital data is possible.
- Parameters can be set and changed via the network, enabling remote equipment operation.
- Models, serial numbers, etc., can be confirmed on the network.
- The settings can be copied from the master (scanner), making parameter reconfiguration after maintenance obsolete.
- Device damage and disconnection can be checked.
- It can also be converted to Ethernet networks and connected, enabling devices to be IoT-ready.

Image of operation detection

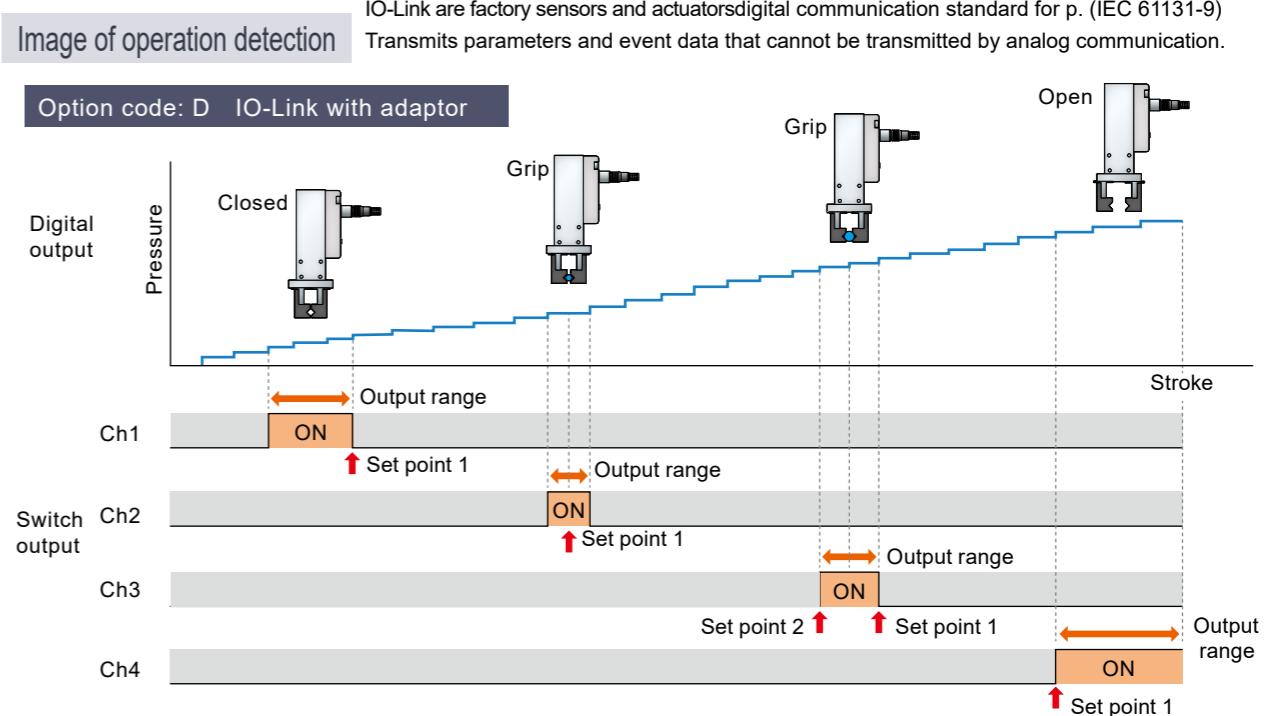

Gripping orientation judgment

By detecting misaligned orientations when gripped, contact accidents can be prevented at the transported destination.

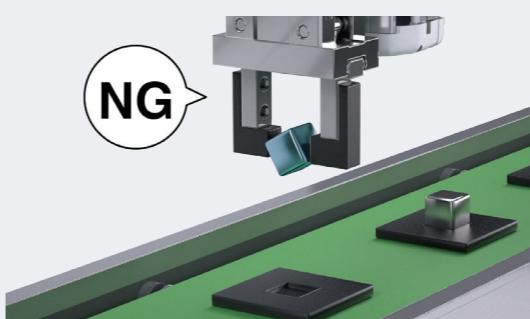

Minute workpiece gripped / missed judgment

Accurately judges whether even tiny workpieces were gripped or missed.



HIGH PRODUCTIVITY SERIES

**Increased rigidity of linear guides even in thin types
Achieves high rigidity, high precision, and high durability**

Low-profile long stroke hand

LST-HP1 Series

Momentary stops greatly reduced

Number of replacements greatly reduced

Significantly reduces replacement time

Service life over 20 million cycles


Subject to CKD prescribed conditions



Thin design from double piston system

Space saving Reduced moment of inertia

Reduces the height and space, contributing to reduced moment of inertia.

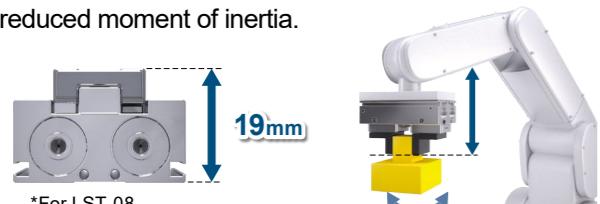

High gripping power



Adopting the double piston system realizes a compact body with high gripping power.



Long service life

Durability Compared with conventional models 4x*

Highly advanced sliding technology has enabled durability 4 times that of conventional models.

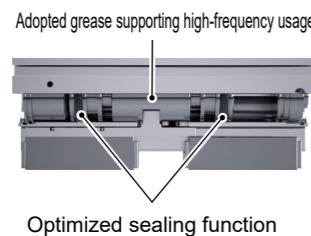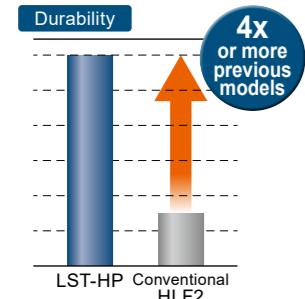

*Compared to conventional CKD product HLF2.

*The durability of the HP Series is the service life under our specified conditions, which will differ depending on the working conditions and ambient environment. This is not a guarantee of 4 times or more under conditions.


Increased linear guide performance

High rigidity High precision

Increased amount of overhang Repeatability ±0.03 mm

By improving the guide rigidity beyond that of conventional products, the allowable moment has been increased.


Rigidity 30% UP

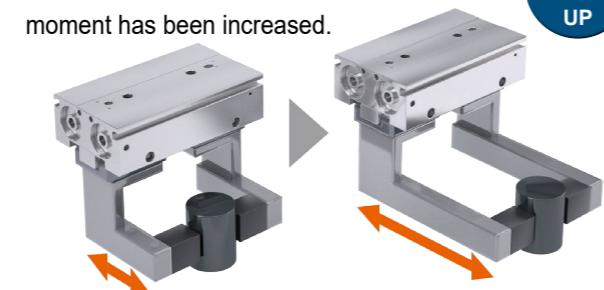

Reduced processes on site

High precision positioning hole ±0.025mm

The addition of "positioning holes" with the grip center as reference allows the centering precision to be easily reproduced.

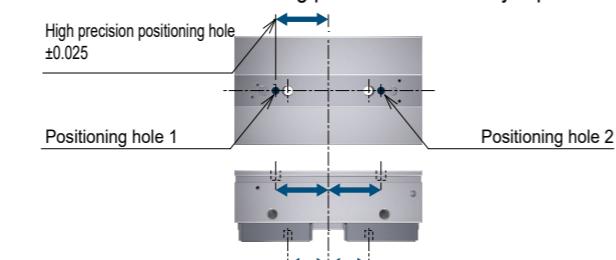

Switch with bending resistant lead wire can be selected

A switch can be selected that uses a bending-resistant lead wire that does not easily break even when used in moving parts.

**Although thin, it can make measurements at the time of gripping.
Can be replaced before breakdowns**

Low-profile long stroke hand with length measuring function

LSTM-HP2 Series

Momentary stops greatly reduced

Number of replacements greatly reduced

Predictive maintenance Available

Service life over 20 million cycles


Subject to CKD prescribed conditions



High precision

Repeatability ±0.04 mm Linearity F.S.±0.5%

A new sensor system has been integrated, achieving higher repeatability and linearity than ever before.

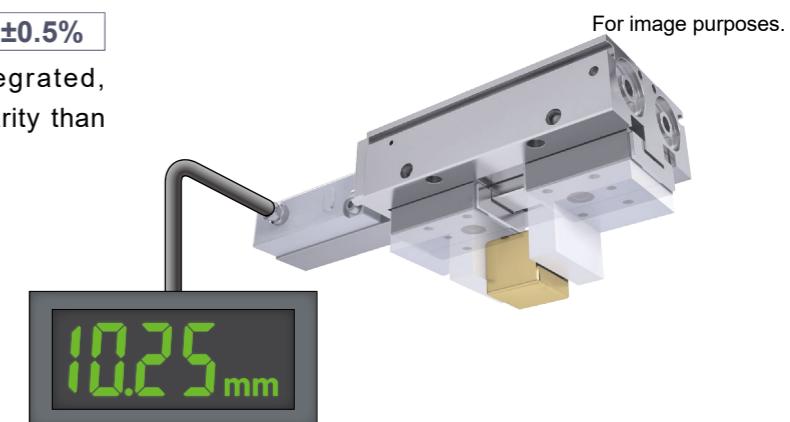


Industry's 1st

Integrated structure

Uses LVDT* sensor with excellent vibration and shock resistance.

A displacement sensor is built into the body, achieving a high-precision integrated structure.

* LVDT is short for Linear Variable Differential Transformer, a sensor that converts mechanical displacement into electric signal for output.

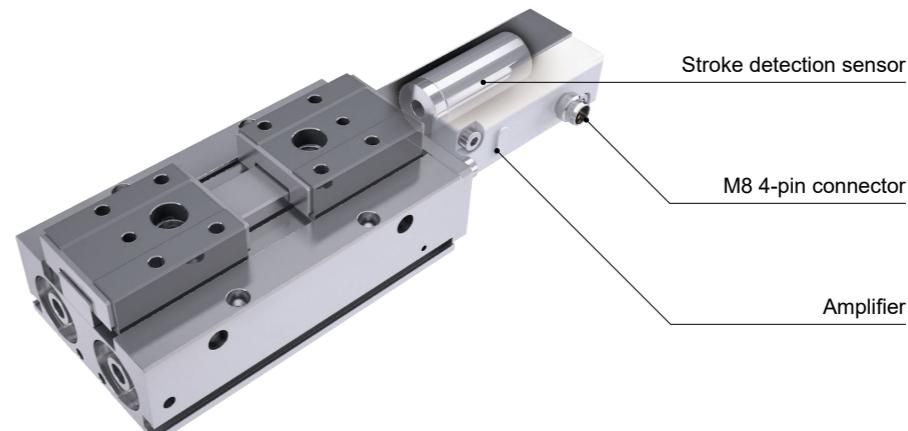

HIGH PRODUCTIVITY SERIES

Rethinking compressed air
Increased component service life and productivity

Air booster

ABP2-HP1 Series

Momentary stops greatly reduced

Number of replacements greatly reduced

Service life over 10 million cycles
Subject to CKD prescribed conditions




Long service life

The design of the packing part of the cylinder has been optimized, and the long-life 4G Series valve has been adopted, achieving more than twice the durability of conventional products.




Operational cycle

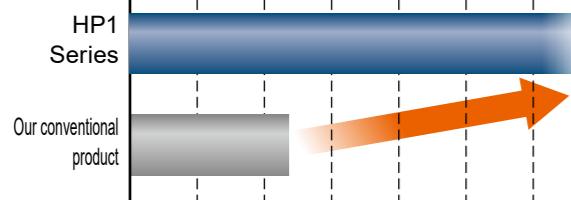

2x or more previous models

Air tank


Can be compactly mounted with air tank. The air tank can be selected from 2 sizes, 5 L and 10 L.

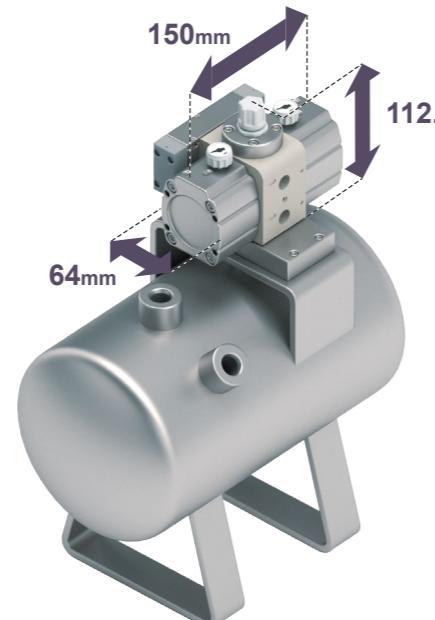

Air tank 2 Sizes Available

Flexible mounting in any direction

Use brackets to add can be installed according to specifications. Select from 3 directions for pipe leadout.

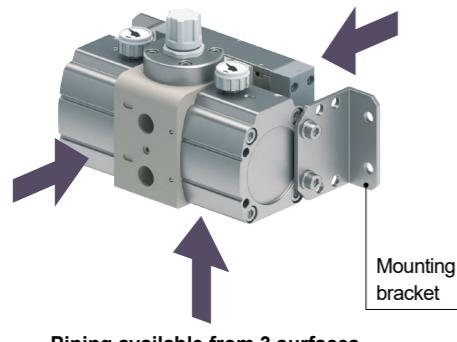

3 directions for pipe leadout

High reliability


Uses proprietary technology of our conventional ABP-12 product to achieve stable operation.

Low noise

By eliminating metal collisions, we have realized a 10dB reduction compared to conventional products.
*Subject to CKD measurement conditions.

10 db lower than previous models

Contributes to energy savings of the plant by utilizing existing compressed air equipment to boost pressure in areas where it is needed. Long service life components reduce total cost of plant

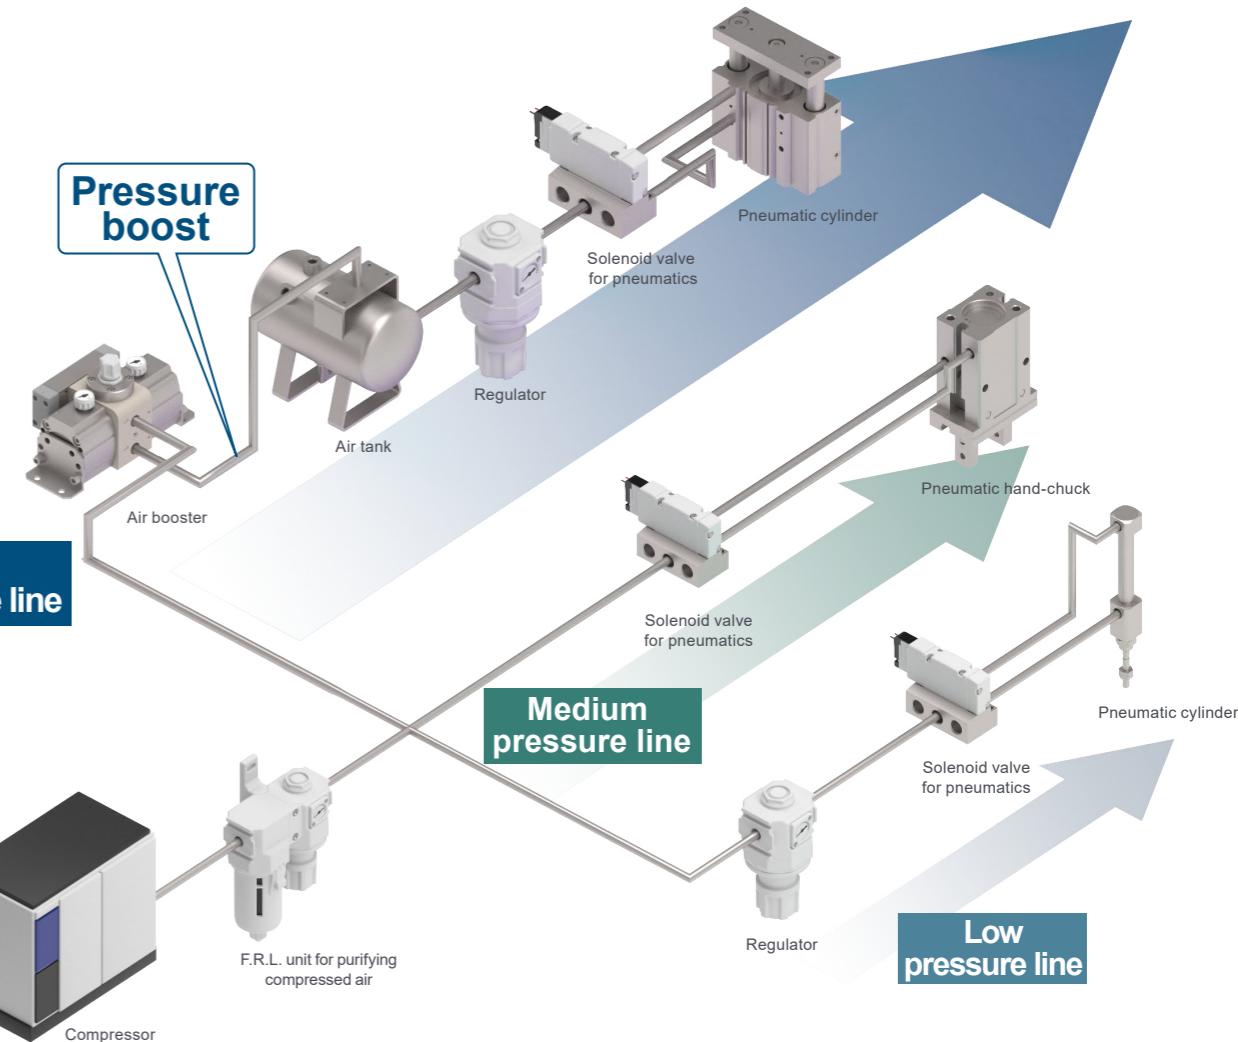


Case Study

- Increased gripping power with the robot hand



- Increased cylinder thrust in narrow sections

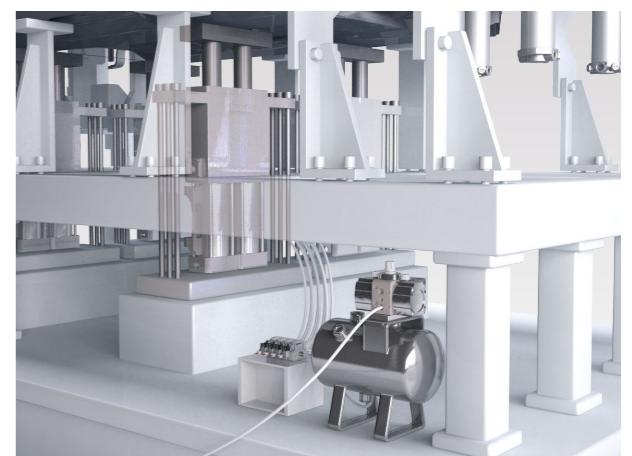

Comprehensive pneumatic system only achievable by CKD

Manage compressed air properly and use the ideal system components to achieve longer service life

Drain Countermeasures

Draining the compressed air can cause the grease of the component to flow and reduce the service life or cause rust, which may lead to component failure. It is necessary to take measures to prevent drainage from occurring and to remove the generated drainage.

[Super dryer \(High polymer membrane air dryer\)](#)

SD/SU/SDM Series

A high-performance air dryer that does not require a power supply and can be installed in the same manner as a filter. Reduces drainage on the secondary side of the dryer.



[Drain separator](#)

FX Series

Water drop separation efficiency of 99% is achieved by CKD's original fluid analysis method. Easy installation and reliable drain elimination.



Purifying compressed air

Foreign matter and oil in the compressed air may lead to component failure, so be sure to remove them with a filter or oil mist filter. Since they will certainly be used, CKD puts emphasis on elements with long service life.

[Air filter](#)

F Series


Two-layer structure is used for the filter element. Increases filtration area, improves filtration capacity and achieves a long service life.



[Oil mist filter](#)

M Series

A special coating is applied to the mantle to ensure long service life while removing oil. A differential pressure switch that outputs the service life of the mantle can also be mounted.

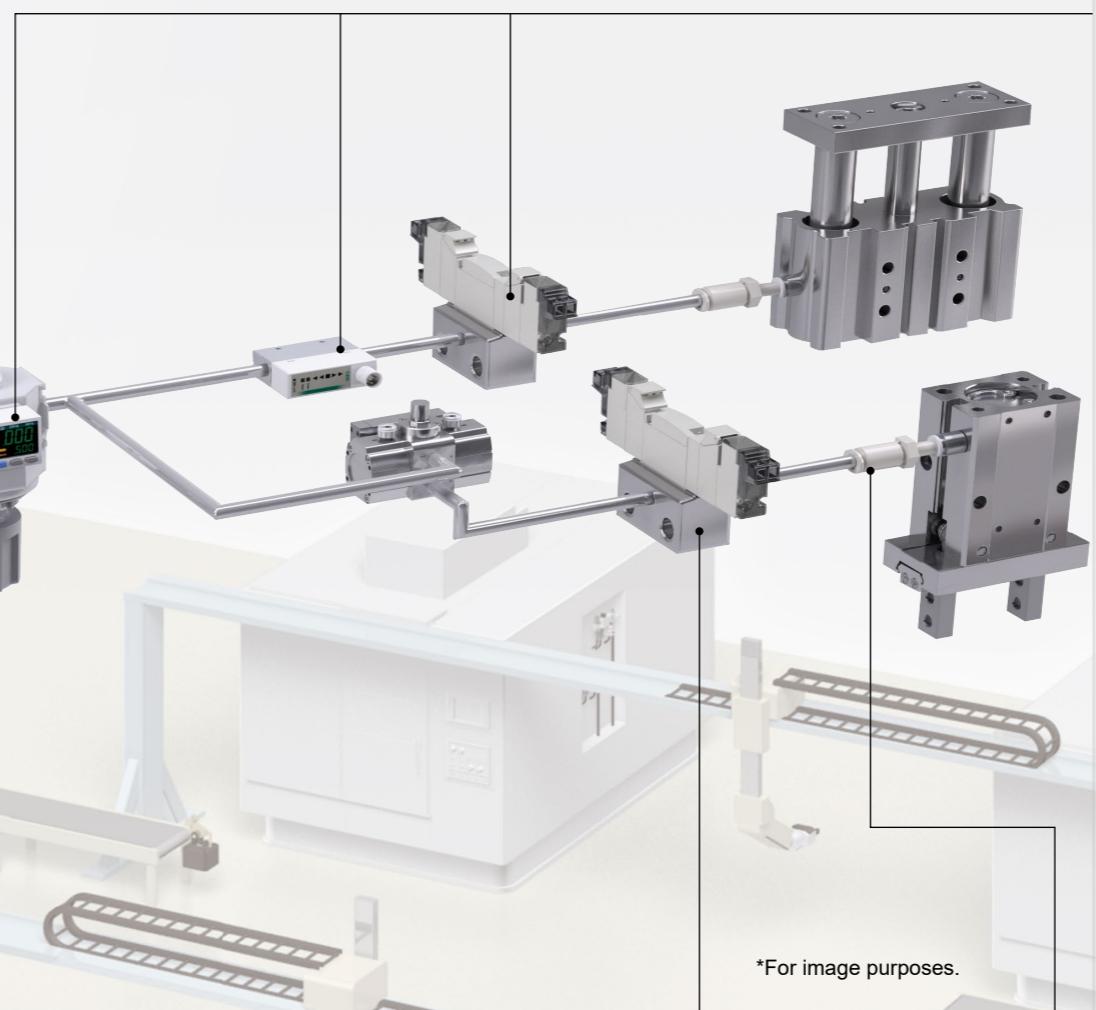


Reliability of the directional control valve

In order to extend the service life of equipment, the directional control valve that drives the actuator must also be reliable. CKD has also optimized the sliding part of the directional control valve to achieve stable operation.

[Pilot operated 3, 5-port solenoid valve](#)

4G Series

By optimizing the sliding part of the spool, it has achieved a long service life of over 100 million cycles* and stable operation, supporting high-frequency stable operation of the actuator.

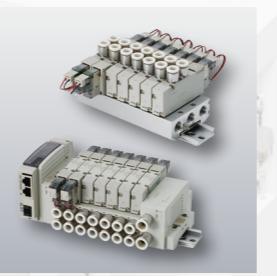

*Subject to CKD prescribed conditions

Status monitoring

Since the operation status of the facility such as air flow rate and air pressure, number of operational cycles of each component and energization time are constantly output as digital signals, the status can be monitored for preventive maintenance.

[Pilot operated 3, 5-port valve](#)

4G Series

The solenoids being turned ON and slave unit energization times can be monitored. Threshold values can be set, enabling preventive maintenance.



[Compact flow rate sensor \(RAPIFLOW\)®](#)

FSM3 Series

Monitors air flow rate. In addition to monitoring drops and fluctuations of the air flow rate, it helps manage the air consumption. Detects flow from bi-directions.



[Digital pressure sensor](#)

PPX Series

Monitors air pressure. Detects pressure drops and fluctuations. An error is output in two stages; "Caution" and "Abnormal".



[Digital gap switch](#)

GPS3 Series

Monitors the seating condition of the workpiece. Also outputs nozzle clogging signals.



[Compact flow rate controller](#)

FCM Series

Fluid control components for various gases. It can detect peripheral system abnormalities. Self-detection functions for detecting the deterioration of sensors and proportional solenoid valves.



[Digital electro-pneumatic regulator](#)

EVD Series

Compressed air pressure control component component operations and status monitoring. 2 switch outputs (IO-Link data) can be set and output simultaneously.



Condensation countermeasures

When driving a compact actuator, air is not completely discharged from the valve, and drain is generated by using the same air repeatedly. A quick exhaust valve that can be easily installed is effective as a countermeasure.

[Quick exhaust valve](#)

QEL Series

The quick exhaust valve with push-in fitting can be easily retrofitted to an actuator with condensation.




Super dryer (High polymer membrane air dryer)

SD/SU/SDM Series

Drain Countermeasures

Catalog No. CB-024SA

The SD/SU/SDM Series is a dryer that can be used like a filter, dehumidifying with a high polymer membrane without using electricity. Since no power supply is required, easy installation, long service life and stable operation are realized.

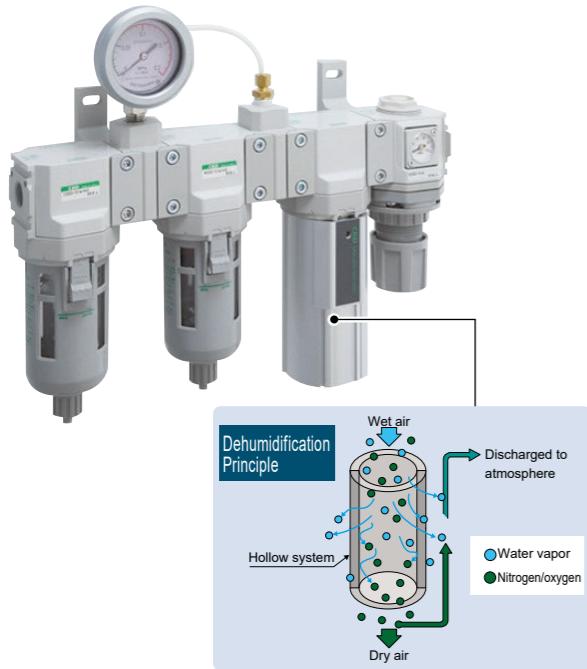**No power supply needed**

Since a power supply is not required, it can be easily retrofitted to a device that malfunctions due to drain.

Stable operation

Since there are no mechanical movable parts or electrical parts, sudden breakdown does not occur and dry air can be stably supplied for long periods of time.

Modular design

Because of its unique modular concept, it can be directly connected to CKD's refining component, which helps reduce design, piping and installation steps.


Drain separator

FX Series

Drain Countermeasures

Catalog No. CB-024SA

The FX Series achieves 99% water drop separation efficiency with a high-performance louver while being lightweight and compact. Maintains long-term moisture removal capacity to remove drainage without using elements.

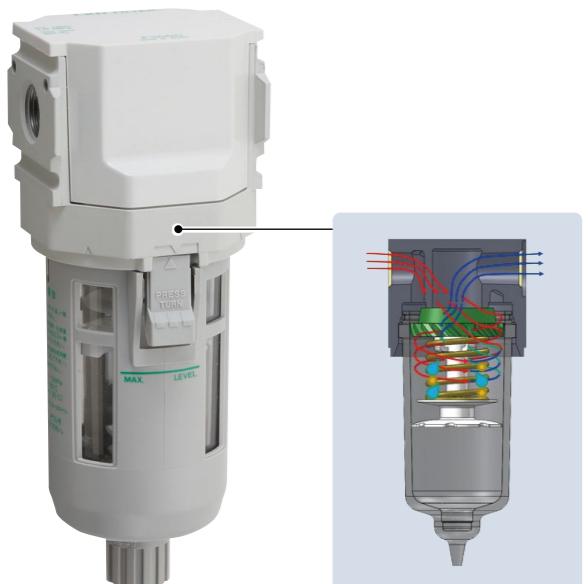**Optimal centrifugal mechanism**

An ideal louver shape has been achieved using CKD's proprietary fluid analysis method. Water is reliably removed by the ideal centrifugal structure.

**Unchanging water removal capacity**

Since it does not rely on the filter element, it does not clog and the water removal performance does not change.

Modular design

Because of its unique modular concept, it can be directly connected to CKD's refining component, which helps reduce design, piping and installation steps.

Air filter

F Series

Purifying compressed air

Catalog No. CB-024SA


The F Series has a unique two-layer structure element, so it has a wide filtration area and can be used stably for a long time with less pressure drops compared to normal elements.

**Louver has been optimized to reduce the size and space**

Cyclone effect is improved by the ideal design of the louver. It has become smaller while maintaining the same water separation capacity.

Long service life with 2-layer structure element

It adopts CKD's proprietary two-layer structure element, improving filtration capacity and extending the service life.

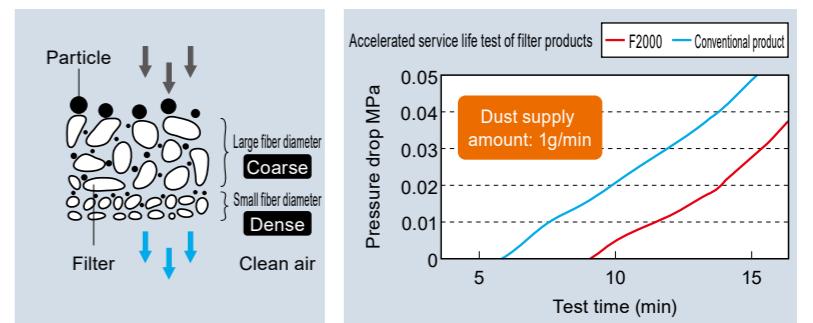


Oil mist filter

M Series

Purifying compressed air

Catalog No. CC-1383A

The M Series reliably removes oil from the compressed air, contributing to the protection of precise components and extending the service life of Components. CKD has applied a special coating to the surface of the mantle to achieve a long service life.

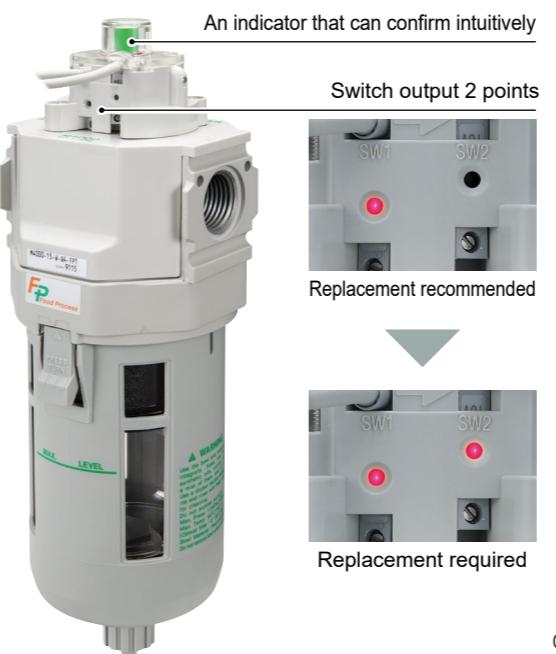**The differential pressure switch enables predictive maintenance**

Detects pressure drops due to clogging of the mantle. In addition to the visual check indicator, it is capable of outputting the recommended replacement time and required replacement time.


Long-life mantle

A special coating is applied to the mantle surface to suppress pressure drops, enabling stable use for a long time.

Pilot operated 3, 5-port solenoid valve

4G Series

The 4G Series has optimized the sliding parts to achieve endurance of 100 million cycles or more*. Stable operation with low sliding supports the reliable operation of the actuator and stable operation of the equipment.

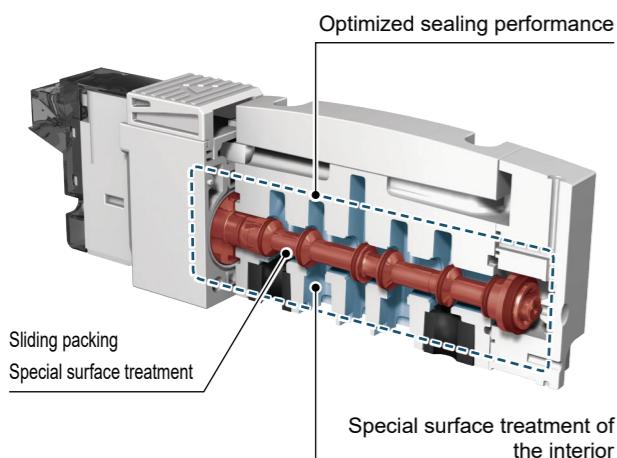

Reliability of the directional control valve

Catalog No. CB-023SA

Low friction/long service life

The superb sliding mechanism of the main valve realizes low friction and long service life.

Response time 12 ± 2 ms (4G1 single solenoid type)

Durability count of 100 million operations or more*

* Under our specified conditions.


Improved responsivity after startup

Smooth start even after time off. Effective for Monday morning troubles and unexplained stoppages as well.

Prevents problems with foreign matter

- Internal pilot filter equipped as standard.


- Air supply filter equipped as standard
(ports A/B equipped as option)




Quick exhaust valve

QEL Series

Installation of a quick exhaust valve is effective as a countermeasure against condensation in compact actuators. The QEL Series is compact, space saving and has push-in fitting, which allows it to be easily installed near the actuator.

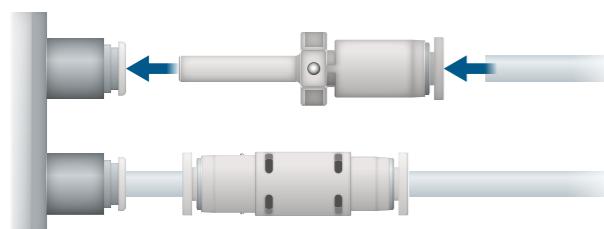**Case Study****Before**


Condensation is generated due to repeated adiabatic expansion.

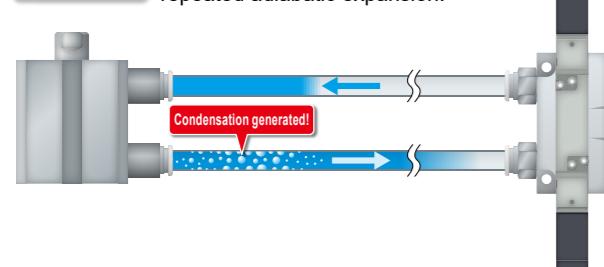**Easy retrofitting**

The plug type and in-line type are available, and can be installed directly or in the middle of the piping to suit the installation location.

After

Since it is discharged directly to the atmosphere near the cylinder, condensation does not occur

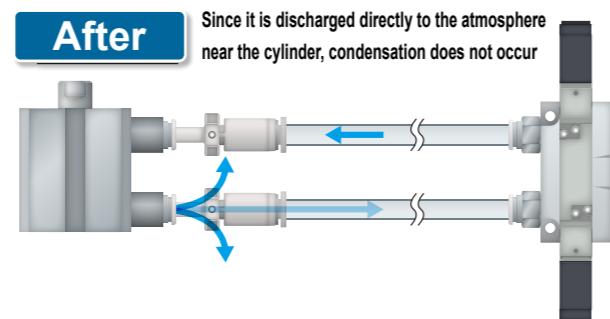


Reliability of the directional control valve

Status monitoring

Catalog No. CC-1466A

IO-Link Compatible Components Series

It is important to acquire necessary data efficiently in order to monitor the condition of pneumatic components and perform preventive maintenance. IO-Link compatible components can easily acquire data and utilize it.

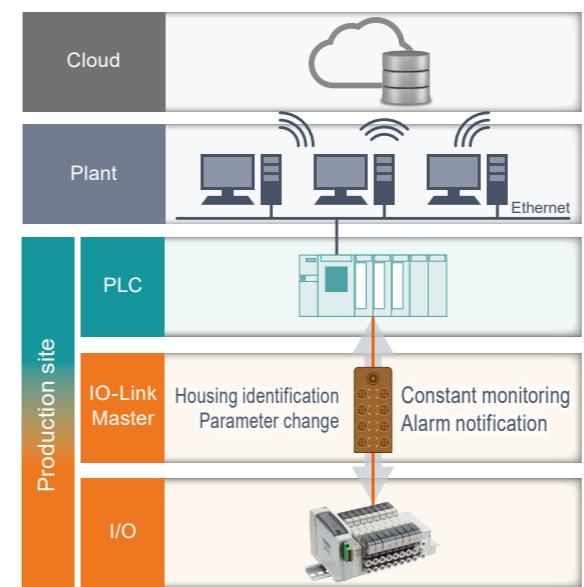**What IO-Link can do****Features of IO-Link**

- デジタル信号** Constant monitoring with digital data is possible.
- パラメータ遠隔操作** Parameters can be set and changed via the network, enabling remote equipment operation.
- 筐体識別** Models, serial numbers, etc., can be confirmed on the network.
- データストレージ** The settings can be copied from the master (scanner), making parameter reconfiguration after maintenance obsolete.
- 異常通知** Device damage and disconnection can be checked.
- フルドライバの提供** It can also be converted to Ethernet networks and connected, enabling devices to be IoT-ready.

IO-Link Compatible Components Series

Pilot operated 3/5-port valve

4G

- Specs
- Cylinder bore size $\varnothing 20$ to $\varnothing 100$
 - Working pressure range 0.2MPa to 0.7MPa
 - Degree of protection IP20

Digital pressure sensor

PPX

- Specs
- Set pressure For low pressure: -101.0 to +101.0kPa
For high pressure: -0.101 to +1.010 MPa
 - IO-Link communication specifications
Transmission speed: COM3 (230.4 kbps)
Minimum cycle time: 1.0ms

Compact flow rate controller

FCM

- Specs
- Flow rate control range 0.015L/min to 100L/min
 - Applicable fluid
Compressed air, nitrogen, argon, oxygen, city gas, methane, propane, hydrogen, helium
 - IO-Link communication specifications
Transmission speed COM3 (230.4 kbps)
Min. cycle time: 2 ms

Compact flow rate sensor RAPIFLOW®

FSM3

- Specs
- Flow rate range 0.5L/min to 1000L/min
 - Applicable fluid
Clean air, compressed air, nitrogen gas, argon, oxygen, carbon dioxide, gas mixture (argon + carbon dioxide)
 - IO-Link communication specifications
Transmission speed: COM2 (38.4 kbps) Min cycle time: 5 ms

Digital gap switch

GPS3

- Specs
- Working pressure: 50 to 200kPa
 - Detection range Short range 0.02 to 0.15mm Wide range 0.03 to 0.4mm
 - IO-Link communication specifications
Transmission speed: COM2 (38.4 kbps)
Minimum cycle time: 5 ms

Digital electro-pneumatic regulator

EVD

- Specs
- Specified pressure range 50kPa to 1000kPa
 - Pressure control range 0kPa to 900kPa
 - IO-Link communication specifications
Transmission speed: COM3 (230.4 kbps)
Min. cycle time: 2 ms

CKD

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	

SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	

LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	

SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	

SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

HP1 Series Long service life cylinder



CONTENTS

● Pencil shaped cylinder (SCPD3-HP1)	2
● Small bore size cylinder (CMK2-HP1)	4
● Round shaped cylinder (SCM-HP1)	6
● Compact cylinder (SSD2-HP1)	10
● Compact direct mounting cylinder (MDC2-HP1)	14
● Small compact cylinder (MSD-HP1)	16
● Small guided compact cylinder (MSDG-L-HP1)	20
● Compact cylinder (SMG-HP1)	24
● Linear slide cylinder (LCR-HP1)	26
● Linear slide cylinder (LCG-HP1)	34
● Guided cylinder (STM-HP1)	40
● Guided cylinder (STG-HP1)	42
● Twin rod cylinder (STR2-HP1)	44
⚠ Precautions for use	222

Long service life cylinder series variation

Model No.	Bore size (mm)	Stroke (mm)
SCPD3-HP1	ø6/ø10/ø16	5 to 150
CMK2-HP1	ø20/ø25/ø32/ø40	5 to 150
SCM-HP1	ø20/ø25/ø32/ø40	10 to 150
SSD2-HP1	ø12/ø16/ø20/ø25/ø32/ø40	1 to 100
MDC2-HP1	ø4/ø6/ø8/ø10	3/4/6/8/10
MSD-HP1	ø6/ø8	5/10/15/20/25/30
MSDG-L-HP1	ø6/ø8/ø12/ø16	5/10/15/20/25/30
SMG-HP1	ø6/ø10/ø16/ø20/ø25/ø32	5 to 100
LCR-HP1	ø6/ø8/ø12/ø16/ø20/ø25	10/20/30/40/50/75/100/125/150
LCG-HP1	ø6/ø8/ø12/ø16/ø20/ø25	10/20/30/40/50/75/100/125/150
STM-HP1	ø6/ø10	5/10/15/20
STG-HP1	ø12/ø16/ø20/ø25/ø32/ø40	5 to 150
STR2-HP1	ø6/ø10/ø16/ø20/ø25/ø32	5 to 150


⚠ Read the safety precautions in "Pneumatic Cylinders" (Catalog No.CB-029SA and CB-030SA) before use.

⚠ CAUTION

■ Some models use oil-impregnated bearings, and oil may be discharged outside of the cylinder. Do not use in places susceptible to oil.

CKD

Long service life cylinder

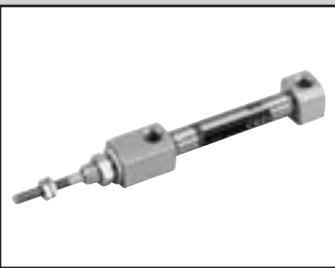

Pencil shaped cylinder Double acting/single rod

Long service life cylinder

SCPD3-HP1 Series

● Bore size: ø6/ø10/ø16

JISCode



Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Compatible with rechargeable batteries

Supports food mtg. processes

Specifications

Item	SCPD3-HP1 SCPD3-L-HP1 (with switch)		
STM	Bore size mm	ø6	ø10
STG	Actuation	Double acting	
STR2	Working fluid	Compressed air	
SCPD3	Max. working pressure MPa	1.0	
CMK2	Min. working pressure MPa	0.15	0.1
SCM	Proof pressure MPa	1.6	
SSD2	Ambient temperature °C	-10 to 60 (no freezing)	
SMG	Port size	M5	
LCR	Stroke tolerance mm	+1.0	0
STG	Working piston speed mm/s	50 to 750	
STS	Cushion	With rubber cushion	
STL	Lubrication	Not required	
LSH-A	Allowable absorbed energy J	0.012	0.041
LSH-G		0.162	
LSH-F			

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
ø6	15/30/45/60	100	5
ø10		150	
ø16		150	

*1: The custom Stroke is available in 1 mm increments.

Min. Stroke with switch

Air Booster	APP2	1 pc. attached		2 pcs. attached		
		Sketch	Rod side mount	Head side mount	Different surface mounting	
STM	Min. Stroke	5 mm		10 mm	28 mm	
LCR	Sketch	3 pcs. attached				
LCG						
STR2						
LSH-A						
LSH-G						
LSH-F						
LSHL-A						
LSHL-G						
LSHL-F						
SCPD3	Different surface mounting		Same surface mounting			
CMK2						
SCM						
SCG						
SSD2	Min. Stroke		38 mm	54 mm		
STG						

For dimensions, refer to the SCPD3 Series in "Pneumatic Cylinders I (CB-029SA)".

CMK2-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)

CMK2 - 00 - 20 - 30 - Y - HP1

With switch (built-in magnet for switch)

CMK2 - 00 - 20 - 30 - T0H - R - M - Y - HP1

A Mounting
*1

B Bore size

C Port thread

D Stroke

E Switch model No.

F Switch quantity
*4

G Option
*5

H Accessory
*3

⚠ Precautions for model No. selection

*1: One side foot (LS) has maximum Stroke of 50 mm.

*2: Refer to page 4 for the minimum stroke with switch.

*3: "I" and "Y" cannot be selected together.

*4: Up to three switches can be installed. If four or more switches are required, switch mounting brackets for the extra switches must be prepared separately.

*5: For 20 or 25 bore size, the rod is stainless steel as standard and the rod nut is zinc chromate. If a stainless steel rod nut is necessary, select the "M" option code.

[Model No. example]

CMK2-00-20-30-T0H-R-MY-HP1

Model: Small bore size cylinder double acting/standard

- A** Mounting :Basic
- B** Bore size :ø20 mm
- C** Port thread :Rc thread
- D** Stroke :30 mm
- E** Switch model No. :Reed T0H switch, lead wire 1m
- F** Switch quantity :1 on rod side
- G** Option :Piston rod material (stainless steel)
- H** Accessory :Rod clevis

How to order switch

● Switch body + mounting bracket set

CMK2 - T0H - 20

B Bore size

E Switch model No.

● Switch body only

SW - T0H

E Switch model No.

● Mounting bracket set

CMK2 - T - 20

B Bore size

Mounting bracket

Code	Description		
A Mounting			
00	Basic		
LB	Axial foot (both sides)		
LS	Axial foot (one side)		
FA	Rod side flange		
FB	Head side flange		
CA	Eye bracket		
CC	Eye bracket integrated		
CC1	Eye bracket, bush pressfit		
CB	Clevis Bracket (pin and split washer pin included)		
TA	Rod side trunnion		
TB	Head side trunnion		
B Bore size (mm)			
20	ø20	32	ø32
25	ø25	40	ø40
C Port thread			
Blank	Rc thread		
NN	NPT thread (made to order)		
GN	G thread (made-to-order product)		
D Stroke (mm)			
Bore size	Stroke	*2	Custom Stroke
ø20	5 to 150	In 1 mm increments	
ø25			
ø32			
ø40			
E Switch model No.			
Lead wire	Lead wire	Voltage	Display
Straight type	L-shaped type	AC DC	Lead Line
T0H*	T0V*	● ●	1-color display
T5H*	T5V*	● ●	No indicator lamp
T8H*	T8V*	● ●	1-color display
T1H*	T1V*	●	2-wire
T2H*	T2V*	●	1-color display
T3H*	T3V*	●	3-wire
T2HR3	T2VR3	●	1-color display
T3PH*	T3PV*	●	Bending resistant lead wire
T2WH*	T2WV*	●	1-color display (made to order)
T2YH*	T2YV*	●	2-wire
T3WH*	T3WV*	●	2-color display
T3YH*	T3YV*	●	3-wire
T2JH*	T2JV*	●	1-color display off-delay
* Lead wire length			
Blank	1 m (standard)		
3	3 m (option)		
5	5 m (option)		
F Switch quantity			
R	1 on rod side		
H	1 on head side		
D	2		
T	3		
G Option			
M	Piston rod material (stainless steel)		
H Accessory			
I	Rod eye		
Y	Rod clevis (pin and split washer pin attached)		
B2	Clevis bracket (pin and snap ring included)		

How to order mounting brackets


Bore size (mm)	ø20	ø25	ø32	ø40
Mounting bracket				
Basic (00)	*8	M1-00-20	M1-00-30	M1-00-30
Axial foot (LB/LS)	*7	M1-LB-20	M1-LB-30	M1-LB-30
Flange (FA/FB)		M1-FA-20	M1-FA-30	M1-FA-30
Trunnion (TA/TB)		M1-TA-20	M1-TA-30	M1-TA-40
Eye bracket (CA)		M1-CA-20	M1-CA-30	M1-CA-30
Clevis bracket (CB)		M1-CB-20	M1-CB-30	M1-CB-30

*6: Regarding mounting brackets, mounting nuts and toothed washers are included with the axial foot type and flange type. The trunnion type includes mounting nuts.

*7: For axial foot types (two-sided), 2 sets of the "M1-LB-*1" in the table above are required.

*8: Mounting nut, toothed washer only. Although 1 set is included with the basic product (00), use this when needed.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

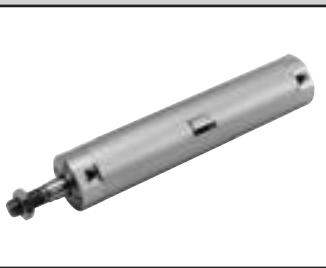

Round shaped cylinder Double acting/single rod

Long service life cylinder

SCM-HP1 Series

● Bore size: ø20/ø25/ø32/ø40

JISCode



Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries

Supports food mtg. processes

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Specifications

Item		SCM-HP1					
LCG	Bore size mm	ø20	ø25	ø32	ø40		
STM	Actuation	Double acting					
STG	Working fluid	Compressed air					
STR2	Max. working pressure MPa	1.0					
SCPD3	Min. working pressure MPa	0.1					
CMK2	Proof pressure MPa	1.6					
SCM	Ambient temperature °C	-10 to 60 (no freezing)					
SCG	Port size With rubber cushion	Rc1/8					
SSD2	With air cushion	M5		Rc1/8			
SMG	Stroke tolerance mm	+1.4 0 (up to 150)					
LCR	Working piston speed mm/s	30 to 1000 (Operate within the allowable absorbed energy.)					
STG	Cushion	Either rubber cushion or air cushion can be selected.					
STS	Effective air cushion length mm	8.1	8.1	8.6	8.6		
STL	Lubrication	Not required					
LSH-A	Allowable absorbed energy J	With rubber cushion	0.1	0.2	0.5		
LSH-G		With air cushion	0.8	1.2	2.5		
LSH-F					3.7		

*1:"No cushion" in the allowable absorption energy indicates the allowable absorption energy of the side that is not indicated ("R" → head side, "H" → rod side) when the one-side air cushion is selected.

*2:Without a cushion, large energy generated by the external load cannot be absorbed. Please provide an external shock absorber.

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke(mm)	Min. Stroke (mm)
ø20			
ø25	25, 50, 75,	150	
ø32	100, 125, 150		10
ø40			

*1:The custom stroke is available in 1 mm increments.

Number of installed switches and min. Stroke (mm)

● Switch mounting: Rail

Switch quantity	1			2			3			4			5			
	Proximity			Reed												
Bore size (mm)	T2,T3	T2W,T3W	T*Y*													
SMG	ø20	10			25	50	70	55	55	70	70	55	75	110	110	90
STG	ø25	10			25	50	70	55	55	70	70	55	75	110	110	90
STM	ø32	10			25	50	70	55	55	70	70	55	75	110	110	90
LCR	ø40	10			25	50	70	55	55	70	70	55	75	110	110	90

*1:For types with one switch and a stroke of 10mm or more and less than 25mm, trunnion mounting is not available since the switch rail mounting position is changed. Regarding the mounting position,"Pneumatic Cylinders I (No. CB-029SA)".

● Switch mounting: Band

Switch quantity	1			2			3			4			5			
	Proximity			Reed												
Bore size (mm)	T2,T3	T2W,T3W	T*Y*		T0,T5	T2W,T3W	T*Y*		T0,T5	T2W,T3W	T*Y*		T0,T5	T2W,T3W	T*Y*	
LSH-A	ø20	10			25	30	35	25	50	55	55	50	70	75	80	70
LSH-F	ø25	10			25	30	35	25	50	55	55	50	70	75	80	70
LSH-L	ø32	10			25	30	35	25	50	55	55	50	70	75	80	70
LSH-G	ø40	10			25	30	35	25	50	55	55	50	70	75	80	70

For dimensions, refer to the SCM Series in "Pneumatic Cylinders I (CB-029SA)".

How to order

Without switch(built-in magnet for switch)

SCM-LB-40-B-100-MI-HP1

With switch(built-in magnet for switch)

SCM-LB-40-B-100-T2H-D-MI-HP1**A Mounting**
*1**B Bore size****C Port thread****D Cushion****E Stroke****F Switch model No.**

*3

G Switch quantity**H Switch mounting****I Option**
*4**J Accessory**
*5

Code	Description	
A Mounting		
00	Basic	
LB	Axial foot	
FA	Rod side flange	
FB	Head side flange	
CA	Eye bracket	
TA	Rod side trunnion	
TB	Head side trunnion	
B Bore size (mm)		
20	ø20	
25	ø25	
32	ø32	
40	ø40	
C Port thread		
Blank	Rc thread	
N	NPT thread (made to order) With air cushion: ø32 and over	
G	G thread (made to order) With air cushion: ø32 and over	
D Cushion		
B	With two-sided air cushion	
R	Rod side air cushioned	
H	Head side air cushioned	
D	With two-sided rubber cushion	
E Stroke (mm)		
Bore size		Stroke *2
ø20 to ø40		10 to 150
		In 1 mm increments
F Switch model No.		
Lead wire Straight type	Lead wire L-shaped type	Voltage
AC	DC	Display
T0H*	T0V*	● ● 1-color display
T5H*	T5V*	● ● No indicator lamp
T8H*	T8V*	● ● 1-color display
T1H*	T1V*	● 1-color display
T2H*	T2V*	● 2-wire
T3H*	T3V*	● 3-wire
T2HR3	T2VR3	● 1-color display bend resistant lead wire
T3PH*	T3PV*	● 1-color display
T2WH*	T2WV*	● 2-wire
T2YH*	T2YV*	● 3-wire
T3WH*	T3WV*	● 2-color display
T3YH*	T3YV*	● 3-wire
T2YD*	-	● 2-color display
T2YDT*	-	● AC magnetic field
T2JH*	T2JV*	● 1-color display off-delay
* Lead wire length		
Blank	1 m (standard)	
3	3 m (option)	
5	5 m (option)	
G Switch quantity		
R	1 on rod side	
H	1 on head side	
D	2	
T	3	
4	4 (when there are more than 4 switches, indicate switch quantity.)	
H Switch mounting		
Blank	Rail method	
Z	Band method	
I Option		
Q	Switch rail attached at shipment	
M	Piston rod material (stainless steel)	
J Accessory		
I	Rod eye	
Y	Rod clevis (pin and snap ring attached)	
B2	Clevis bracket	

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Short stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Precautions for model No. selection

*1: Mounting bracket will be shipped with the product.

*2: Refer to page 6 for the number of installed switches and the min. stroke.

*3: T8H/V switches cannot be mounted when the switch mounting type is the rail type.

*4: "Q" (switch rail attached at shipment) is not available for "Z" switch mounting.

*5: "I" and "Y" cannot be selected together.

*6: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

SCM-LB-40B-100-T2H-D-MI-HP1

Model: Round shaped cylinder, double acting

A Mounting form : Axial foot**B** Bore size : ø40 mm**C** Port thread : Rc thread**D** Cushion : Both-sided air cushion**E** Stroke : 100 mm**F** Switch model No.: Proximity T2H switch, lead wire 1 m**G** Switch quantity : 2 pcs. included**H** Switch mounting : Rail**I** Option : Piston rod material (stainless steel)**J** Accessory : Rod eye

SCM-HP1 Series

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2

Environment-resistant cylinder
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F
LST
LSTM

Low-profile long stroke hand
LSTM

Air Booster
ABP2

Compatible with rechargeable batteries
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR

LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes
SCPD3
CMK2
SCM
SCG
SSD2
STG

How to order switch

[Switch mounting: Rail]

- Switch body + mounting rail set

SCM - **T0H*** - **D** - **40** - **100**

Switch model No.
(Page 7 Item **F**) Bore size
(Page 7 Item **B**)

Switch quantity
(Page 7 Item **G**) Stroke
(Page 7 Item **E**)

- Mounting rail only

SCM - **T** - **40** - **100**

Mounting rail

Bore size
(Page 7 Item **B**)

Stroke
(Page 7 Item **E**)

How to order mounting brackets

Bore size (mm)	ø20	ø25	ø32	ø40
Mounting bracket				
Foot (LB)	SCM-LB-20	SCM-LB-25	SCM-LB-32	SCM-LB-40
Flange (FA/FB)	SCM-FA-20	SCM-FA-25	SCM-FA-32	SCM-FA-40
Eye bracket (CA)	SCM-CA-20	SCM-CA-25	SCM-CA-32	SCM-CA-40
Trunnion (TA/TB)	SCM-TA-20	SCM-TA-25	SCM-TA-32	SCM-TA-40

*1: All mounting brackets have mounting bolts attached.

*2: The foot mounting bracket is provided as 2 pcs./set.

Consumable parts list

With rubber cushion

Bore size (mm)	Kit No.	Part name
ø20	SCM-20DK-HP1	Rod packing
ø25	SCM-25DK-HP1	Cylinder gasket
ø32	SCM-32DK-HP1	Cushion rubber
ø40	SCM-40DK-HP1	Piston packing

*1: Specify the kit No. when placing an order.

[Switch mounting: Band]

- Switch body + mounting bracket set + band

SCM - **T2H*** - **40** - **Z**

Switch model No.
(Page 7 Item **F**)

Bore size
(Page 7 Item **B**)

- Mounting bracket set + band

SCM - **Z** - **40**

Bore size
(Page 7 Item **B**)

[Switch body only]

SW - **T0H***

Switch model No.
(Page 7 Item **F**)

Material of mounting bracket

Mounting	Material
LB	Steel
FA/FB	Aluminum
TA/TB	Steel
CA	Steel


*1: Mounting bracket will be shipped with the product.

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

● SSD2 Series

Descriptions		Standard Stroke body with spacer	
STM	Model No.	Refer to How to order.	
LCR	Product	A spacer is added to the standard Stroke body to adjust the Stroke in 1 mm increments.	
LCG	Descriptions	Bore size	Stroke range
STR2	Stroke range	12/16	1 to 29
LSH-A		20/25	1 to 49
LSH-G		32/40	1 to 99
LSH-F	Example of model No.	Model No.: SSD2-25-38-HP1 To create a 38mm Stroke, +2 mm spacer is added to the SSD2-25-40-HP1. B + Stroke is 62.5 mm.	

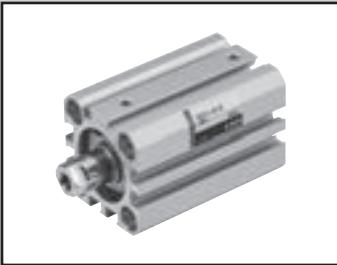

Compact cylinder double acting/single rod

Long service life cylinder

SSD2-HP1 Series

● Bore size: ø12/ø16/ø20/ø25/ø32/ø40

JISCode

**Specifications**

Descriptions		SSD2-HP1 SSD2-L-HP1 (with switch)				
Bore size	mm	ø12	ø16	ø20	ø25	ø32
Actuation		Double acting				
Working fluid		Compressed air				
Max. working pressure	MPa			1.0		
Min. working pressure	MPa			0.1		
Proof pressure	MPa			1.6		
Ambient temperature	°C			-10 to 60 (no freezing)		
Port size		M5			Rc1/8 *1	
Stroke tolerance	mm		+1.0	0		
Working piston speed	mm/s		50 to 500			
Cushion			No			
Lubrication			Not required			
Allowable absorbed energy	J	0.004	0.01	0.016	0.021	0.025
						0.092

*1: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

Stroke


Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
ø12	5/10/15/20	30	
ø16	25/30		
ø20	5/10/15/20/25		
ø25	30/35/40/45/50	50	
ø32	5/10/15/20/25		
ø40	30/35/40/45/50/75/100	100	

Min. stroke with switch (With 2 switches)

Bore size (mm)	T0□T5	T2□T3
ø12		
ø16	10 (5)	
ø20		
ø25		
ø32		5
ø40		

1: Less than 10mm Stroke of 2-color display, off-delay, AC magnetic field proof with T1, T8* switches are not available.

*2: Values in () are for the type with 1 on rod side.

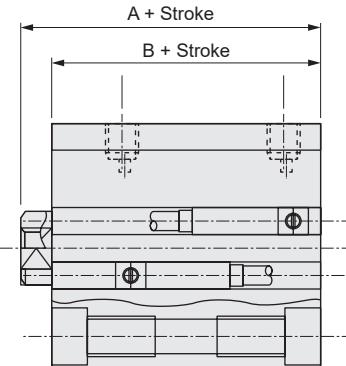

For Dimensions, refer to the SSD2 Series in "Pneumatic Cylinders I (CB-029SA)".

How to order

Without switch (without magnet for switch)

SSD2-12-5-N-LB-I-HP1

With switch (built-in magnet for switch)

SSD2-L-12-10-T0H-R-N-LB-I-HP1**A** Model No.**B** Bore size**C** Port thread**D** Stroke**E** Switch model No.

*1

*2

*3

*8

*9

F Switch quantity**G** Option

*4

H Mounting bracket

*5 *6

⚠ Precautions for model No. selection

1: The T2YD switch cannot be mounted on the ø12 and ø16 bore sizes.

2: T8 switch cannot be installed on ø12 to ø32.

*3: The F type switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.

*4: Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring will be stainless steel, not steel.

The rod end male thread nut is stainless steel.

*5: The mounting bracket is included at shipment.

*6: The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to "Pneumatic Cylinders I (CB-029SA)" for dimensions. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

*7: "I" and "Y" cannot be selected together.

*8: The F type switch with L type lead wire on ø20 models cannot be selected on Strokes 15 mm or under.

*9: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

*10: F type switch cannot be selected.

*11: Copper and PTFE free as standard.

[Example of model No.]**SSD2-L-12-10-T0H-R-N-LB-I-HP1**

Model: Compact cylinder, standard

B Bore size	: ø12 mm
C Port thread	: Rc thread
D Stroke	: 10 mm
E Switch model No.	: Reed T0H switch, lead wire length 1 m
F Switch quantity	: 1 on rod side
G Option	: Rod end male thread
H Mounting bracket	: Axial foot
I Accessory	: Rod eye

Code	Description
A Model No.	
SSD2	Double acting/single rod
SSD2-L	Double acting/single rod/with switch

B Bore size (mm)	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40

C Port thread	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made to order)
GN	G thread (ø32 and over) (made to order)

D Stroke (mm)	
Refer to the Stroke table on the following page.	

Lead wire Straight type	Lead wire L-shaped	Voltage AC DC	Display	Bore size			
				12	16	20	25
F2S*			1-color display	2-wire		●	●
F3S*				3-wire		●	●
F2H*	F2V*			2-wire		●	●
F3H*	F3V*			3-wire		●	●
F3PH*	F3PV*		1-color display (PNP output) (made to order)	3-wire		●	●
F2YH*	F2YV*		2-color display	2-wire		●	●
F3YH*	F3YV*			3-wire		●	●
T0H*	T0V*		1-color display	Reed	●	●	●
T5H*	T5V*		No indicator lamp	2-wire	●	●	●
T8H*	T8V*		1-color display		●	●	●
T1H*	T1V*		1-color display	2-wire	●	●	●
T2H*	T2V*			3-wire	●	●	●
T3H*	T3V*				●	●	●
T2HR3	T2VR3		1-color display bend resistant lead wire	2-wire	●	●	●
T3PH*	T3PV*		1-color display (PNP output) (made to order)	3-wire	●	●	●
T2WH*	T2WV*				●	●	●
T2YH*	T2YV*		2-color display	2-wire	●	●	●
T3WH*	T3WV*			3-wire	●	●	●
T3YH*	T3YV*				●	●	●
T2YD*	-		2-color display	2-wire	●	●	●
T2YDT*	-		AC magnetic field		●	●	●
T2JH*	T2JV*		1-color display off-delay	2-wire	●	●	●

* Lead wire length	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

F Switch quantity	
R	1 on rod side
H	1 on head side
D	2

G Option	
Blank	Rod end female thread
N	Rod end male thread
M	Piston rod material (stainless steel)

H Mounting bracket	
Blank	Without mounting bracket
LB	Axial foot type
CB	Clevis bracket (pin and snap ring attached)
FA	Rod side flange
FB	Head side flange

I Accessory (available when rod end male thread "N" is selected)	
I	Rod eye
Y	Rod clevis (pin and snap ring attached)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

① Accessory


*7

SSD2-HP1 Series

[Stroke table]

Long service life cylinder	SCPD3	CMK2	SCM	Stroke (mm)	Applicable bore size					
					12	16	20	25	32	40
Environment-resistant cylinder	SSD2			5	●	●	●	●	●	●
	MDC2			10	●	●	●	●	●	●
	MSD			15	●	●	●	●	●	●
	MSDG-L			20	●	●	●	●	●	●
	SMG			25	●	●	●	●	●	●
	LCR			30	●	●	●	●	●	●
	LCG			35			●	●	●	●
	STM			40			●	●	●	●
	STG			45			●	●	●	●
	STR2			50			●	●	●	●
	SCPD3			75				●	●	●
	CMK2			100					●	●
	SCG			Min. Stroke (mm) *1	1					
Linear Slide Hand	SSD2			Max. Stroke (mm)	30	50	100			
	SMG			Custom Stroke *2	In 1 mm increments					
	LCR				*1: Less than 5 mm with 1-color display switch and less than 10 mm with the 2-color display, off-delay, AC magnetic field proof, T1* or T8* switch are not available. Refer to page 10 for the min. stroke length with switch.					
Low-profile long stroke hand	STG				*2: The total length when using a custom Stroke is the same as that when using the next longer standard Stroke.					
	STS				*3: Refer to the dimensions in "Pneumatic Cylinders I (CB-029SA)" for the min. Stroke with mounting bracket LB.					
Compatible with rechargeable batteries	LSH-A									
	LSH-G									
	LSH-F									
	LSHL-A									
	LSHL-G									
	LSHL-F									
	LSHM-A									
	LSHM-G									
	LSHM-F									
	LST									
Supports food mfg. processes	LSTM									
	ABP2									
	SCPD3			Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40
	CMK2			Mounting bracket						
	SCM			Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40
	SSD2			Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40
	MSD			Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40
	MSDG-L									
	SMG									
	STG									
SSD2 consumable parts list	LCR									
	LCG			Bore size (mm)	Kit No.	Part name				
	STR2			ø12	SSD2-12K-HP1					
	LSH-A			ø16	SSD2-16K-HP1					
	LSH-G			ø20	SSD2-20K-HP1	Rod metal gasket				
	LSH-F			ø25	SSD2-25K-HP1	Rod packing				
	LSHL-A			ø32	SSD2-32K-HP1	Piston packing				
	LSHL-G			ø40	SSD2-40K-HP1					
	LSHL-F									
	SCPD3									
	CMK2									
	SCM									
	SCG									
	SSD2									
	STG									

How to order switch

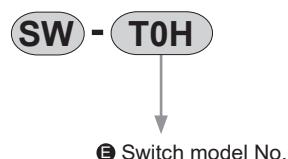

How to order mounting brackets

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40
Mounting bracket						
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40

*1: The foot mounting bracket is provided as 2 pcs./set.

SSD2 consumable parts list

Bore size (mm)	Kit No.	Part name
ø12	SSD2-12K-HP1	
ø16	SSD2-16K-HP1	
ø20	SSD2-20K-HP1	Rod metal gasket
ø25	SSD2-25K-HP1	Rod packing
ø32	SSD2-32K-HP1	Piston packing
ø40	SSD2-40K-HP1	

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service life cylinder



Compact direct mounting cylinder Double acting/single rod

Long service life cylinder

MDC2-HP1 Series

● Bore size: ø4, ø6, ø8, ø10

JISCode



Specifications

Item	MDC2-HP1			
	MDC2-L-HP1 (with switch)			
STM	ø4	ø6	ø8	ø10
STG	Double acting			
STR2	Working fluid Compressed air			
SCPD3	Max. working pressure MPa 0.7			
CMK2	Min. working pressure MPa 0.2			
SCM	0.15			
SCG	Proof pressure MPa 1.05			
SSD2	Ambient temperature °C -10 to 60 (no freezing) *1			
SMG	Port size M3			
LCR	Stroke tolerance mm +0.5			
STG	0			
STS	Working piston speed mm/s 50 to 500			
STL	Cushion No			
LSH-A	Lubrication Not required			
LSH-G	Allowable absorbed energy J			
LSH-F	This product cannot absorb the energy generated by an external load mounted on the cylinder. When using the product with no load, separately provide a shock absorber on the outside.			
LSHL-A				
LSHL-G				
LSHL-F				
LSHM-A				
LSHM-G				
LSHM-F				

*1: When using the proximity switch, use at 40°C or less.

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. stroke length with two switches (mm)		Min. stroke length with one switch (mm)	
			Reed switch	Proximity switch	Reed switch	Proximity switch
ø4	3/6	6	-	-	-	-
ø6	4/6/8	8	6	4 (8)	4	4
ø8	4/6/8	8	8	4 (8)	4	4
ø10	4/6/10	10	6	4 (10)	4	4

*1: Products with Stroke other than standard Stroke are not available.

*2: For F2Y, F3Y or F3P, the min. Stroke will be the dimensions in ().

Low-profile long stroke hand

LST

LSTM

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

Compatible with rechargeable batteries

For dimensions, refer to the MDC2 Series in "Pneumatic Cylinders I (CB-029SA)".

Supports food mfg. processes

SCPD3

CMK2

SCM

SCG

SSD2

STG

14

How to order

- Without switch (without magnet for switch)

MDC2 - 6 - 4 - HP1

- With switch (built-in magnet for switch)

MDC2-L - 6 - 4 - F2V - R - HP1

A Model No.

B Bore size

C Stroke

D Switch model No.

*1

*2

*3

*4

E Switch quantity

⚠ Precautions for model No. selection

*1: Ø4 with switch cannot be selected.

*2: For MDC2 with reed switch, the cylinder cannot be mounted on a magnetic substance (iron plate, etc.). Otherwise, this could lead to switch detection malfunction.

*3: When using MDC2-L-6 with reed switch, use a non-magnetic bolt (stainless steel hexagon socket head cap screw, etc.) for the cylinder mounting bolt. Otherwise, this could lead to switch detection malfunction.

*4: Refer to page 14 for the min. Stroke with switch.

[Example of model No.]

MDC2-L-6-4-F2V-R-HP1

Model: Compact direct mounting cylinder

- A Model No.** : Double acting/single rod/with switch
- B Bore size** : Ø6 mm
- C Stroke** : 4 mm
- D Switch model No.** : Proximity F2V switch, lead wire 1 m
- E Switch quantity** : 1 on rod side

How to order switch

SW - F0H

Switch model No.
(Item **D** above)

Code	Description	
A Model No.		
MDC2	Double acting/single rod	Without switch
MDC2-L	Double acting/single rod	With switch

B Bore size

4	Ø4
6	Ø6
8	Ø8
10	Ø10

C Stroke (mm)

3	3 (Ø4)
4	4 (Ø6 to Ø10)
6	6 (Ø4 to Ø10)
8	8 (Ø6, Ø8)
10	10 (Ø10)

D Switch model No.

Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage		Display	Lead wire
			AC	DC		
F0H*	F0V*	Reed		●	1-color display	2-wire
-	F2S*			●		
F2H*	F2V*			●		
-	F3S*			●		
F3H*	F3V*			●		3-wire
F3PH*	F3PV*			●	1-color display(PNP output) (Made to order)	
F2YH*	F2YV*			●	2-color display	2-wire
F3YH*	F3YV*			●		3-wire

* Lead wire length

Blank	1 m (standard)
3	3 m (option)

E Switch quantity

R	1 on rod side
H	1 on head side
D	2

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3
CMK2
SCM
SSD2
MDC2
MSD

MSDG-L

SMG

LCR

LCG

STM

STG

STR2

SCPD3

CMK2

SCM

SCG

SSD2

SMG

LCR

STG

STS

STL

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

Air

Booster

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Small compact cylinder Double acting/single rod

Long service life cylinder

MSD-HP1 Series

● Bore size: ø6/ø8

JISCode



Specifications

Item	MSD-HP1 MSD-L-HP1 (with switch)
Bore size mm	ø6, ø8
Actuation	Double acting
Working fluid	Compressed air
Max. working pressure MPa	1.0
Min. working pressure MPa	0.15
Proof pressure MPa	1.6
Ambient temperature °C	-10 to 60 (where, no freezing)
Port size	M3
Stroke tolerance mm	+0.5 0
Working piston speed mm/s	50 to 500
Cushion	No
Lubrication	Not required
Allowable absorbed energy J	This product cannot absorb the energy generated by an external load mounted on the cylinder. When using the product with no load, separately provide a shock absorber on the outside.

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke with two switches(mm)		Min. Stroke with one switch (mm)	
			Reed switch	Proximity switch	Reed switch	Proximity switch
ø6	5/10/15	30	10	5 (10)	5	5
ø8	20/25/30					

*1: Products with Stroke other than standard Stroke are not available.

*2: For F2Y, F3Y or F3P, the min. Stroke will be the dimensions in ().

For dimensions, refer to the MSD Series in "Pneumatic Cylinders I (CB-029SA)".

How to order

- Without switch (without magnet for switch)

MSD - 6 - 5 - R - HP1

- With switch (built-in magnet for switch)

MSD-L - 6 - 5 - F0H - R - R - HP1

A Model No.**B** Bore size**C** Stroke**D** Switch model No.

*1

E Switch quantity**F** Option

*2

⚠ Precautions for model No. selection

*1: For Ø6 or Ø8 with switch, use a non-magnetic (stainless steel, etc.) mounting bolt.

*2: For rear piping, body side mounting is possible.
Note that 2 bolts are used for rod side mounting and head side mounting.

[Example of model No.]

MSD-L-6-5-F0H-R-R-HP1

- | | |
|---------------------------|--|
| A Model No. | : Double acting/single rod/with switch |
| B Bore size | : Ø6 mm |
| C Stroke | : 5 mm |
| D Switch model No. | : Reed F0H switch, lead wire 1 m |
| E Switch quantity | : 1 on rod side |
| F Option | : Rear piping |

How to order switch

SW - **F0H**

Switch model No.
(Item **D** above)

Code		Description			
A Model No.					
MSD		Double acting/single rod	Without switch		
MSD-L			With switch		
B Bore size(mm)					
6	Ø6				
8	Ø8				
C Stroke(mm)					
5	5				
10	10				
15	15				
20	20				
25	25				
30	30				
D Switch model No.					
Lead wire Straight type	Lead wire L-shaped type	Contact Point	Voltage AC	Voltage DC	Display lamp
F0H*	F0V*	Reed	●		
-	F2S*		●		
F2H*	F2V*		●		1-color display
-	F3S*		●		
F3H*	F3V*		●		
F3PH*	F3PV*		●		1-color display(PNP output) (Made to order)
F2YH*	F2YV*		●		3-wire
F3YH*	F3YV*		●		2-wire
			●		3-wire
E Lead wire length					
Blank		1m(Standard)			
3		3m(Option)			
E Switch quantity					
R		1 on rod side			
H		1 on head side			
D		2			
F Option					
Blank		Front piping			
R		Rear piping			

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

MSD-HP1 Series


Switch selection table

Switches may not be installable depending on relations between cylinder installation and Stroke.


Refer to the table below to select a switch.

Switches cannot be used for side mounting in the following combinations.


- Combinations in which F2YH/V, F3YH/V or F3PH/V is mounted at the switch mounting position H with Stroke 5 mm
- Combinations in which F2YH, F3YH or F3PH is mounted at the switch mounting position H with Stroke 10 mm
(For the min. Stroke with switch, 16 page.)

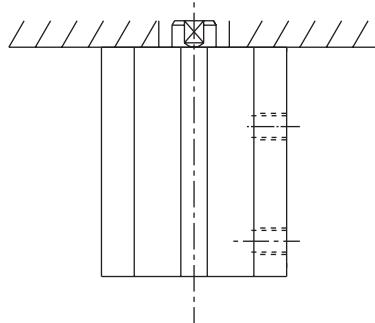

For rod side installation

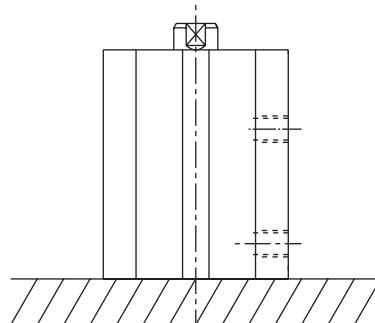

For head side mounting

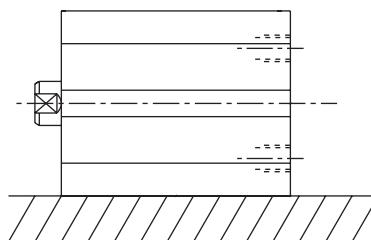

For side mounting

● For rod side installation

Linear Slide Hand	Tube Bore size (mm)	Reed switch				Proximity switch										
		F0H		F0V		F2S/F3S		F2H/F3H		F2V/F3V		F2YH/F3YH/F3PH		F2YV/F3YV/F3PV		
		Switch mounting position	R	H	R	H	R	H	R	H	R	H	R	H	R	H
Low-profile long stroke hand	Ø6	5	○	○	○	○	○	○	○	×	○	○	○	×	○	×
		10	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		15 or more	○	○	○	○	○	○	○	○	○	○	○	○	○	○
Air Booster	Ø8	5	○	○	○	○	○	○	○	×	○	○	○	×	○	×
		10	○	○	○	○	○	○	○	○	○	○	○	○	○	○
		15 or more	○	○	○	○	○	○	○	○	○	○	○	○	○	○


● For head side mounting

Compatible with rechargeable batteries	Tube Bore size (mm)	Reed switch				Proximity switch										
		F0H		F0V		F2S/F3S		F2H/F3H		F2V/F3V		F2YH/F3YH/F3PH		F2YV/F3YV/F3PV		
		Switch mounting position	R	H	R	H	R	H	R	H	R	H	R	H	R	H
LSHL-A	Ø6	5	×	×	○	○	○	○	×	○	○	○	×	×	○	×
		10	○	×	○	○	○	○	×	○	○	○	×	○	○	○
		15	○	×	○	○	○	○	○	○	○	○	×	○	○	○
LSHL-G	Ø8	20 or more	○	×	○	○	○	○	○	○	○	○	○	○	○	○
		5	×	×	○	○	○	○	×	○	○	○	×	×	○	×
		10	○	×	○	○	○	○	×	○	○	○	×	○	○	○
LSHL-F	Ø8	15	○	×	○	○	○	○	○	○	○	○	×	○	○	○
		20 or more	○	×	○	○	○	○	○	○	○	○	○	○	○	○

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service cylinder

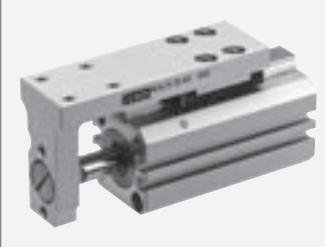

Small guided compact cylinder
Double acting/Guided/With switch

Long service life cylinder

MSDG-L-HP1 Series

● Bore size: ø6/ø8/ø12/ø16

JISCode



Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries

Supports food mtg. processes

Specifications

Item	MSDG-L-HP1(With switch)				
LCG	Bore size mm	ø6	ø8	ø12	ø16
STM	Actuation				
STG	Double acting				
STR2	Working fluid				
SCPD3	Compressed air				
CMK2	Max. working pressure MPa	1.0			
SCM	Min. working pressure MPa	0.2	0.15	0.1	
SCG	Proof pressure MPa	1.6			
SSD2	Ambient temperature °C	5 to 60			
SMG	Port size	Front piping	M3	M5	
		Rear piping	M3	M3	
LCR	Stroke tolerance mm	+2.0			
STG		0			
STS	Working piston speed mm/s	50 to 500			
STL	Cushion	With rubber cushion			
LSH-A	Lubrication	Not required			
LSH-G	Allowable absorbed energy J	0.004	0.014	0.044	
LSH-F				0.110	

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. stroke length with two switches (mm)		Min. stroke length with one switch (mm)	
			Reed switch	Proximity switch	Reed switch	Proximity switch
ø6						
ø8						
ø12	5/10/15	30	10	5	5	5
ø16	20/25/30					

Note: Products with Stroke other than standard Stroke are not available.

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCG

SSD2

STG

For dimensions, refer to the MSDG-L Series in "Pneumatic Cylinders I (CB-029SA)".

How to order

● With switch(built-in magnet for switch)

MSDG-L - 6 - 30 - F0H - D - R - HP1

Model No.

(A) Bore size

(B) Stroke

(C) Switch model No.

*1

*2

(D) Switch quantity

(E) Option
*3

⚠ Precautions for model No. selection

*1: For ø6 or ø8 with switch, use a non-magnetic (stainless steel, etc.) mounting bolt.

*2: When using a proximity switch with ø12 or ø16, use a non-magnetic (stainless steel, etc.) through bolt.

*3: For rear piping, body side mounting is possible.

[Example of model No.]

MSDG-L-6-30-F0H-D-R-HP1

Model No.: Double acting/guided/with switch

- (A) Bore size : ø6 mm
- (B) Stroke : 30 mm
- (C) Switch model No. : Reed F0H switch
- (D) Switch quantity : 2 pcs. included
- (E) Option : Rear piping

How to order switch

SW - F0H

Switch model No.
(Item C above)

Code	Description
A Bore size(mm)	
6	ø6
8	ø8
12	ø12
16	ø16

Code	Description
B Stroke(mm)	
5	5
10	10
15	15
20	20
25	25
30	30

C Switch model No.						
Lead wire Straight type	Lead wire Radial	Contact Point	Voltage AC	Voltage DC	Display lamp	Lead wire
F0H*	F0V*	Reed		●	1-color display	
-	F2S*			●		
F2H*	F2V*			●		
-	F3S*			●		
F3H*	F3V*			●		
F3PH*	F3PV*			●	1-color display(PNP output) (Made to order)	3-wire
F2YH*	F2YV*			●	2-color display	
F3YH*	F3YV*			●	3-wire	

* Lead wire length	
Blank	1m(Standard)
3	3m(Option)

D Switch quantity	
R	1 on rod side
H	1 on head side
D	2

E Option	
Blank	Front piping
R	Rear piping

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	


MSDG-L-HP1 Series

Switch selection table


Switches may not be installable depending on relations between cylinder installation and Stroke.

Refer to the table below to select a switch. Switches cannot be used for side mounting in the following combinations.

- Combinations in which F2YH/V, F3YH/V or F3PH/V is mounted at the switch mounting position H with Stroke 5 mm
- Combinations in which F2YH, F3YH or F3PH is mounted at the switch mounting position H with Stroke 10 mm
(Refer to page 20 for the min. stroke with switch.)

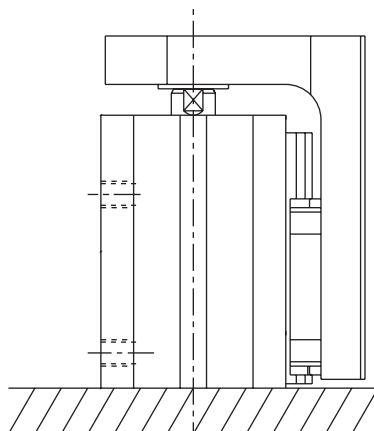

For head side mounting

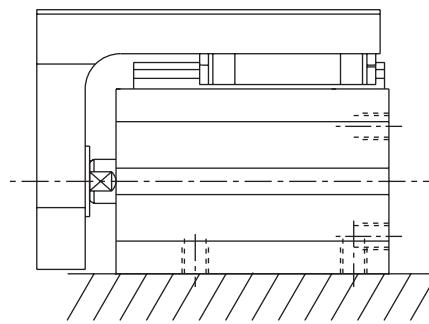

For side mounting

● For head side mounting

Bore size (mm)	Stroke (mm)	Reed switch				Proximity switch							
		F0H		F0V		F2S/F3S		F2H/F3H		F2V/F3V		F2YH/F3YH/F3PH	
		Switch mounting position											
Air Booster	LSTM	R	H	R	H	R	H	R	H	R	H	R	H
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○
Compatible with rechargeable batteries	SCM	15 or more	○	○	○	○	○	○	○	○	○	○	○
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○
Supports food mtg. processes	MSD	15 or more	○	○	○	○	○	○	○	○	○	○	○
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○
LSH-A	STR2	15 or more	○	○	○	○	○	○	○	○	○	○	○
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○
LSH-G	LCG	15 or more	○	○	○	○	○	○	○	○	○	○	○
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○
LSH-F	STR2	15 or more	○	○	○	○	○	○	○	○	○	○	○
		5	×	○	○	○	○	×	○	○	○	×	○
		10	○	○	○	○	○	×	○	○	○	×	○

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service life cylinder

Compact cylinder Double acting/single rod

SMG-HP1 Series

● Bore size: ø6/ø10/ø16/ø20/ø25/ø32

JISCode 

Long service life cylinder

Specifications

Item	SMG-HP1 SMG-L-HP1 (with switch)					
	Ø6	Ø10	Ø16	Ø20	Ø25	Ø32
STM	Bore size mm	Ø6	Ø10	Ø16	Ø20	Ø25
STG	Actuation			Double acting		
STR2	Working fluid			Compressed air		
SCPD3	Max. working pressure MPa			0.7		
CMK2	Min. working pressure MPa	0.12	0.06		0.05	
SCM	Proof pressure MPa			1.05		
Ambient temperature °C			-10 to 60 (no freezing)			
SCG	Port size		M5		Rc1/8	
SSD2	Stroke tolerance mm		+1.5 0			
SMG	Working piston speed mm/s		50 to 500			
LCR	Cushion		With rubber cushion			
STG	Lubrication		Not required			
STS	Allowable absorbed energy J	0.012	0.036	0.1	0.1	0.19
STL						0.5

Environment-resistant cylinder

Stroke

Bore size (mm)	Standard Stroke (mm)	Min. Stroke (mm)
Ø6		
Ø10	5, 10, 15, 20, 25, 30, 40, 50, 60	
Ø16		
Ø20	5, 10, 15, 20, 25, 30, 40, 50, 60, 70, 80,	
Ø25	90, 100	
Ø32		5

*1: The custom Stroke is available in 5 mm increments.

However, the total length is the same as that of the next longer standard Stroke.

Linear Slide Hand

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

Low-profile long stroke hand

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

Supports food mfg. processes

SCPD3

CMK2

SCM

SCG

SSD2

STG

For dimensions, refer to the SMG Series in "Pneumatic Cylinders I (CB-029SA)".

How to order

Without switch (without magnet for switch)

SMG - **6** - **25** - **HP1**

With switch (built-in magnet for switch)

SMG-L - **6** - **25** - **K2H** - **R** - **HP1****A** Model No.**B** Bore size**C** Port thread**D** Stroke**E** Switch model No.**F** Switch quantity**⚠ Precautions for model No. selection*****1: Refer to page 24 for min. Stroke with switch.*****2: Copper and PTFE free as standard.****[Example of model No.]****SMG-L-6-15-K0H-R-HP1**

Model: Compact cylinder

B Bore size : ø6 mm**C** Port thread : Rc thread**D** Stroke : 15 mm**E** Switch model No. : Reed switch K0H, lead wire length 1 m**F** Switch quantity : 1 on rod side

How to order switch

SW - **K2H****E** Switch model No.

Code	Description
A Model No.	
SMG	Double acting
SMG-L	Double acting/with switch

B Bore size (mm)	
6	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Port thread	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made to order)
GN	G thread (ø32 and over) (made to order)

D Stroke (mm)	Applicable bore size					
	ø6	ø10	ø16	ø20	ø25	ø32
5	●	●	●	●	●	●
10	●	●	●	●	●	●
15	●	●	●	●	●	●
20	●	●	●	●	●	●
25	●	●	●	●	●	●
30	●	●	●	●	●	●
40	●	●	●	●	●	●
50	●	●	●	●	●	●
60	●	●	●	●	●	●
70				●	●	●
80				●	●	●
90				●	●	●
100				●	●	●

Lead wire straight Rate type	Lead wire L-shaped	Contact	Voltage		Indicator	Lead wire
			AC	DC		
K0H*	K0V*	Reed	●	●	1-color display	2-wire
K5H*	K5V*		●	●	No indicator lamp	
K2H*	K2V*	Proximity		●	1-color display	2-wire
K3H*	K3V*			●		3-wire
K3PH*	K3PV*			●	1-color display (made to order)	3-wire
K2YH*	K2YV*			●	2-color display	2-wire
K3YH*	K3YV*			●		3-wire

*** Lead wire length**

Blank	1 m (standard)
3	3 m
5	5m

F Switch quantity	
R	1 on rod side
H	1 on head side
D	2

SMG repair parts list

Bore size (mm)	Kit No.	Part name
ø6	SMG-6K-HP1	CR type snap ring (ø6, ø10, ø16)
ø10	SMG-10K-HP1	Rod packing
ø16	SMG-16K-HP1	Cushion rubber R/H
ø20	SMG-20K-HP1	Piston packing
ø25	SMG-25K-HP1	Cover gasket
ø32	SMG-32K-HP1	

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	SMG
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
SMG	LSH-A
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	LSH-A
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Linear slide cylinder Double acting/single rod

Long service life cylinder

LCR-HP1 Series

● Bore size: ø6/ø8/ø12/ø16/ø20/ø25

JISCode



Specifications

Descriptions		LCR-HP1											
LCG	Bore size mm	ø6	ø8	ø12	ø16	ø20							
STM	Actuation	Double acting											
STG	Working fluid	Compressed air											
STR2	Max. working pressure MPa	0.7											
SCPD3	Min. working pressure MPa	0.15 (*1)											
CMK2	Proof pressure MPa	1.05											
SCM	Ambient temperature °C	-10 to 60 (no freezing)											
SCG	Port size Main body side	M3	M5		Rc1/8								
SSD2	Main body back	-	M3		M5	Rc1/8							
SMG	Stroke tolerance mm	+2.0 0 (*2)											
LCR	Working piston speed mm/s	50 to 500 (*3)											
STG	Cushion	With rubber cushion											
LSH-A	Lubrication	Not required											
LSH-G	Allowable absorbed energy J	DownRefer to the table.											
LSH-F	(*1): 0.2 MPa when using ø6 shock absorber type stopper.												
LSHL-A	(*2): Note that there will be a slight gap between the end plate and floating bush if no stopper is attached.												
LSHL-G	(*3): Keep within 50 to 200 mm/s when using a stroke adjusting stopper.												
LSHL-F	(*4): The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.												

Stroke

	Bore size (mm)	Standard Stroke (mm)
LST	ø6	10, 20, 30, 40, 50
LSTM	ø8	10, 20, 30, 40, 50, 75
	ø12	10, 20, 30, 40, 50, 75, 100
ABP2	ø16	10, 20, 30, 40, 50, 75, 100, 125
SCPD3	ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
CMK2	ø25	10, 20, 30, 40, 50, 75, 100, 125, 150

(*1): Products with Strokes other than the above are not available.

LCR allowable absorbed energy(Eo)

Bore size	Standard (J)	With stroke adjusting stopper (J)	With shock absorber stopper (J)
ø6	0.025	0.0032	0.14
ø8	0.058	0.0032	0.25
ø12	0.112	0.014	0.25
ø16	0.176	0.043	0.65
ø20	0.314	0.055	1.3
ø25	0.314	0.14	1.3

For dimensions, refer to the LCR Series in "Pneumatic Cylinders II (CB-030SA)".

How to order

Without switch(built-in magnet for switch)

LCR - **8** - **40** — **S506** **DTN** - **HP1**

With switch(built-in magnet for switch)

LCR - **12** - **40** - **F2H*** - **R** - **S506** **DTN** - **HP1**

Model No.

A Tube
Bore size**B** Stroke**D** Switch quantity**F** Option**C** Switch model No.

- *1: For the adjustable stroke range with a shock absorber stopper, refer to the stopper dimensions table in "Pneumatic Cylinders II (No. CB-030SA)".
- *2: For the port position, refer to the stopper dimensions in "Pneumatic Cylinders II (No. CB-030SA)".
- *3: The port positions of the standard without stopper are ① and ③ in the figure below.
- *4: Refer to stoppers "C*" and "W*" for combination of the stroke adjusting stopper and shock absorber type stopper.
- *5: Can be selected for the type with stopper only.
- *6: Refer to the selection table on page 30 for combinations of options.
- *7: A1**, A2**, A5** and A6** of ø6 to ø8 with 10 mm Stroke or less and ø12 to ø25 with 20 mm Stroke or less are made to order since they are not adjustable using the standard stopper.
- *8: When two switches are necessary for the type with S*** or A*** of ø6 to ø8 with 30 mm Stroke or less, select the F □ H type switch.
- *9: Select when using rear piping.
- *10: Can be selected only when using stroke adjusting stopper (S) and one side mixed type (C).
- *11: When two switches are necessary or a switch is installed on the head side of W3 to 6 (both-sided combined stopper) of ø6 (all Strokes), ø8 with 20 or 30 mm Stroke, ø12 with 30 to 50 mm Stroke or ø16 with 30 to 50 mm Stroke, select the lead wire straight type.
- *12: Cannot be selected when choosing two-sided combined type (W).
- *13: The adjustable stroke range when choosing both-sided combined use (W) is ø6: 9 mm, ø8: 13.5 mm, ø12: 14.5 mm, ø16: 15 mm, ø20: 13 mm, ø25: 10 mm.
- *14: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.


[Example of model No.]

LCR-12-40-F2H-R-A1DT-HP1

Model: Linear slide cylinder double acting/single rod LCR

A Bore size : ø12**B** Stroke : 40 mm**C** Switch model No. : Proximity/2-wire, Reed lead wire straight**D** Switch quantity : 1 (on rod side)**E** Stopper : Shock absorber stopper
Stopper position ①**F** Option : With side and bottom surface ports
Material, steel (nitriding)**E** Stopper

● Stopper position



Code	Description				
A Bore size					
6	ø6				
8	ø8				
12	ø12				
16	ø16				
20	ø20				
25	ø25				

		Bore size (ø)				
		6	8	12	16	20
10	10	●	●	●	●	●
20	20	●	●	●	●	●
30	30	●	●	●	●	●
40	40	●	●	●	●	●
50	50	●	●	●	●	●
75	75		●	●	●	●
100	100			●	●	●
125	125				●	●
150	150					●

C Switch model No.						
Axial lead wire	Radial lead wire	Contact	Voltage	Display	Lead wire	Bore size
				lamp		ø6 ø8 ø12 ø16 ø20 ø25
-	F2S*		AC	●	2-wire	
-	F3S*		DC	●	3-wire	
F2H*	F2V*			●	2-wire	
F3H*	F3V*			●	3-wire	
F3PH*	F3PV*			●	1-color display(PNP output)(Made to order)	3-wire
F2YH*	F2YY*			●	2-color display	2-wire
F3YH*	F3YV*			●	3-wire	
T0H*	T0V*	Reed	●	●	1-color display	2-wire
T5H*	T5V*		●	●	No indicator lamp	
T2H*	T2V*			●	1-color display	2-wire
T3H*	T3V*			●	3-wire	
T2HR3	T2VR3	Proximity		●	Bending resistant lead wire	2-wire
T3PH*	T3PV*			●	1-color display(PNP output)(Made to order)	3-wire
T2WH*	T2WW*			●	2-color display	2-wire
T3WH*	T3WW*			●	3-wire	

* Lead wire length

Blank	1 m (standard)	●
3	3 m (option)	●
5	5 m (option)	●

D Switch quantity

R	1 on rod side
H	1 on head side
D	2

E Stopper

Page 28 for details on the [Stopper].

F Option

Blank Port on stopper: without port

D Port on stopper: side and bottom ports *2, *5, *12

Blank Stopper block material: Steel

T Stopper block material: steel (nitriding) *5

Plug included

Blank No

N With side piping port plug (not available for ø6, ø25) *9

SCPD3	CMK2	SCM	SSD2	MDC2	MSD	MSDG-L	SMG	LCR	LCG	STR2	SCPD3	CMK2	SCM	SCG	SSD2	SMG	LCR	LCG	STR2	SCPD3	CMK2	SCM	SSD2	SMG	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	STG	STM	LCR	LCG	STR2	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SM

LCR-HP1 Series






















[① Stopper]

Code		Description		Code		Description					
E Stopper											
SSD2	Blank	No option		C One side hybrid stopper mix (shock absorber stopper, stroke adjusting stopper)							
MDC2	S Stroke adjusting stopper	*4		C1**	A1+S3						
MSD	S1**	Stopper position ① (can be changed to ④)		C2**	A2+S4						
MSDG-L	S2**	Stopper position ② (can be changed to ③)		C3**	A3+S1						
SMG	S3**	Stopper position ③ (can be changed to ②) *15		C4**	A4+S2						
LCR	S4**	Stopper position ④ (can be changed to ①) *15									
LCG	S5**	Stopper position ①, ③									
STM	S6**	Stopper position ②, ④									
STG	A Shock absorber stopper		*1/*4								
STR2	A1	Stopper position ① (can be changed to ④)									
SCPD3	A2	Stopper position ② (can be changed to ③)									
CMK2	A3	Stopper position ③ (can be changed to ②) *15									
LCR	A4	Stopper position ④ (can be changed to ①) *15									
LCG	A5	Stopper position ①, ③									
LCG	A6	Stopper position ②, ④									
W	W Two-sided combined double stopper(Shock absorber stopper, metal stopper)		*11, *13								
SCG	W 1	A1 + metal stopper									
SSD2	W 2	A2 + metal stopper									
SMG	W 3	A3 + metal stopper									
LCR	W 4	A4 + metal stopper									
STG	W 5	A5 + metal stopper									
STG	W 6	A6 + metal stopper									

Stopper model No. selection method

1 Stopper combination table

Model No.-[① Stopper type] [② Stopper position] [③] Example) LCR-8-40-[S] [5]06-HP1

		Stroke adjustable (one side)	Shock absorber(One side)	Two-sided combined double stopper	One side hybrid stopper mix	Stopper model No. [①]
		[S]	[A]	[W]	[C]	
Stopper position model No. [②]	[1]	[S1] 	[A1] 	[W1] 	[C1] 	
	[2]	[S2] 	[A2] 	[W2] 	[C2] 	
	[3]	[S3] 	[A3] 	[W3] 	[C3] 	
	[4]	[S4] 	[A4] 	[W4] 	[C4] 	
	[5]	[S5] 	[A5] 	[W5] 		
	[6]	[S6] 	[A6] 	[W6] 		

▲ Shows the piping direction. When choosing two-sided combined type (W), the stopper bracket comes with piping on both sides. ▲ The stopper bracket on the reverse side of (piping direction) is provided with a plug.

■ : Shock absorber stopper
■ : Stroke adjusting stopper (adjusting range 5 mm)
■ : Metal adjusting stopper (adjusting range 15 mm)

Stopper model No. selection method

2 Stopper combination table

Model No.-[① ② Stopper type] [③ Adjustable stroke range]

Example) LCR-8-40-S5 [06]-HP1

For stroke adjusting stopper -S

■: Stroke adjusting stopper (adjusting range 5 mm)
 ▲: Stroke adjusting stopper (adjusting range 15 mm)
 △: Stroke adjusting stopper (adjusting range 25 mm)

Adjustable stroke range model No. [③]	Stopper adjusting range		Stopper model No. [①②]					
	Protruding end	Return end	[S1]	[S2]	[S3]	[S4]	[S5]	[S6]
[③]	Blank	5 mm or None	5 mm or None					
	[02]	15 mm or None	15 mm or None					
	[03]	25 mm or None	25 mm or None					
	[04]	15 mm	5 mm					
	[05]	25 mm	5 mm					
	[06]	5 mm	15 mm					
	[07]	5 mm	25 mm					

▲ shows the piping direction.

Shock absorber [A], Cannot be selected for two-sided combined type [W/N].

3 For one side hybrid stopper mix -C

■: Shock absorber stopper
 ▲: Stroke adjusting stopper (adjusting range 15 mm)
 △: Stroke adjusting stopper (adjusting range 5 mm)

■: Stroke adjusting stopper (adjusting range 5 mm)
 △: Stroke adjusting stopper (adjusting range 25 mm)

Adjustable stroke range Model No. [③]	Stopper adjusting range		Stopper model No. [①②]			
	Protruding end	Return end	[C1]	[C2]	[C3]	[C4]
[③]	Blank	5 mm or Shock absorber				
	[02]	15 mm or Shock absorber				
	[03]	25 mm or Shock absorber				

▲ shows the piping direction. For the adjustable stroke range for a shock absorber stopper, refer to the stopper dimensions table in "Pneumatic Cylinders II (No. CB-030SA)".

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-HP1 Series

LCR Double acting/single rod selection table

(Combination with stroke adjusting stopper, shock absorber stopper)

●: Available - : Not available

Model Model No.	Stopper type		Stroke adjustable																						
	Stopper code		S1		S2		S3		S4		S5					S6									
			Adjustment length code																						
MSDG-L	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	04	05	06	07	Blank	02	03	04	05	06	07
SMG	LCR	ø6, ø8	10	●	-	-	●	-	-	●	●	-	●	●	-	●	-	-	●	-	-	-	●	-	
LCR		20 or more	●	●	-	●	●	-	●	●	-	●	●	-	●	●	-	●	-	●	●	-	●	-	
LCG		10	●	-	-	●	-	-	●	●	-	●	●	-	●	-	-	-	●	-	●	-	●	-	
STM		ø12 to ø25	20	●	●	-	●	●	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
STG		30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
STR2																									

Model Model No.	Stopper type		Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix								
	Stopper code		A1	A2	A3	A4	A5	A6	W1	W2	W3	W4	W5	W6	C1	C2	C3	C4					
	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03
MSDG-L	LCR	ø6, ø8	10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	-	●	-	
SMG		20 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
LCR		10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	-	●	-	●	-	●	
STG		ø12 to ø25	20	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	●	-	●	
STS		30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
STL																							

The table above also applies to combinations with option code D (with port on stopper) or T (steel stopper block (nitriding)).

Model Model No.	Stopper type		Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix							
	Stopper code		A1	A2	A3	A4	A5	A6	W1	W2	W3	W4	W5	W6	C1	C2	C3	C4				
	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02
LSH-A	LCR	ø6, ø8	10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	-	●	-
LSH-G		20 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-F		10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	-	●	-	●	-	●
LSH-F		ø12 to ø25	20	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	●	-	●
LSH-A		30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-G																						
LSH-F																						

Model Model No.	Stopper type		Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix							
	Stopper code		A1	A2	A3	A4	A5	A6	W1	W2	W3	W4	W5	W6	C1	C2	C3	C4				
	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02
LSH-A	LCR	ø6, ø8	10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	-	●	-
LSH-G		20 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-F		10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	-	●	-	●	-	●
LSH-F		ø12 to ø25	20	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	●	-	●
LSH-A		30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-G																						
LSH-F																						

Model Model No.	Stopper type		Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix							
	Stopper code		A1	A2	A3	A4	A5	A6	W1	W2	W3	W4	W5	W6	C1	C2	C3	C4				
	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02
LSH-A	LCR	ø6, ø8	10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	-	●	-
LSH-G		20 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-F		10	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	●	-	●	
LSH-F		ø12 to ø25	20	-	-	●	●	-	-	-	●	●	-	-	-	-	-	●	-	●	-	●
LSH-A		30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LSH-G																						
LSH-F																						

Model Model No.	Stopper type		Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix							
	Stopper code</th																					

How to order switch

ø6 to ø12


SW - F2HSwitch model No.
(Page 27 Item②)

For ø16 to ø25

SW - T2H3Switch model No.
(Page 27 Item③)

How to order a stopper set

- Set of a stopper and stroke adjusting stopper or shock absorber stopper
- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

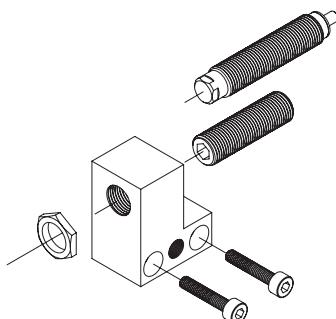**LCR - 12 - S 2 D - S02**Bore size
(Page 27 Item A)**A Stopper type**

S	Stroke adjusting stopper
A	Shock absorber stopper

B Stopper installation position *1

1	Stopper position ① or ④ for
2	Stopper position ② or ③ for

C Port on the stopper

Blank	Without port
D	With side and bottom ports

D Adjustable Stroke *2, *3

Blank	Adjustable stroke range 5 mm
S02	Adjustable stroke range 15 mm
S03	Adjustable stroke range 25 mm

Note) Bottom port is plug-sealed. When using the bottom port with ø20 and 25, buy a plug kit (LCR-20-N 2 pieces/set) and seal the side surface ports before using.

Precautions when purchasing the stopper set

-: Not applicable

When the stopper set is installed in the mounting position ① or ② (refer to page 27), note that the adjustable Stroke will be as shown on the right according to the Stroke.

Model No. code	Option code		Discrete stroke adjusting stopper		
			Adjustable Stroke (mm)		
Bore size	Stroke	-5	-15	-25	
LCR Series	ø6, ø8	10	S02	-	-
		20 or more	Blank	S02	-
	ø12 to ø25	10	S03	-	-
		20	S02	S03	-
		30 or more	Blank	S02	S03

● Stopper set weight

(Unit : g)


Stopper type	S1, S2		A1, A2	
Port on the stopper	Blank, D			
Adjustable Stroke	Blank	S02	S03	Blank
ø6	15	18	-	18
ø8	21	25	-	27
ø12	28	31	34	33
ø16	42	47	52	49
ø20	77	85	92	86
ø25	87	94	101	95

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-HP1 Series

How to order discrete stopper bracket

- Used when changing between □1 (□3) and □2 (□4) or when changing to the stopper with port.
□:SA



LCR - 12 - STB 1 D

Bore size
(Page 27 Item A)

A Stopper installation position

1	Stopper position for
2	Stopper position for

B Port on the stopper


Blank	Without port
D	With side and bottom ports

Note) Bottom port is plug-sealed. When using the bottom port with ø20, 25, Plug kit (LCR-20-N 2 pieces/set) Purchase, Seal the side port before use.

● Stopper bracket weight (Unit : g)	
Stopper installation position	1,2
Port on the stopper	Blank, D
ø6	8
ø8	14
ø12	20
ø16	29
ø20	53
ø25	62

How to order discrete stroke adjusting stopper

- Hexagon socket set screw with urethane
- Use when changing the adjustable stroke range or when using a custom Stroke.



LCR - 12 - S02

Bore size
(Page 27 Item A)

A Adjustable stroke range

S01	Single side 5 mm (standard)
S02	Single side 15 mm
S03	Single side 25 mm

● Select S01, S02 or S03 in .

Note: S03 is not available for ø6 and ø8. Some models may not be available and adjustable stroke range may differ from the above depending on the Model No.

Precautions when purchasing discrete stopper

When a discrete stroke adjusting stopper or a discrete shock absorber stopper is installed in the ① or ② position (refer to page 27), the combination will be as shown on the right according to the Stroke and adjustable Stroke.


Model No. code	Option code	Discrete stroke adjusting stopper			Discrete shock absorber stopper
		Bore size	Stroke	-5	
LCR Series -S1, S2, S5, S6 -A1, A2, A5, A6	ø6, ø8	10	S02	-	-
		20 or more	S01	S02	-
	ø12 to ø25	10	S03	-	-
		20	S02	S03	-
		30 or more	S01	S02	S03
					A01

● Discrete stroke adjusting stopper weight (Unit : g)

Adjustable stroke range	S01	S02	S03
ø6	6	9	-
ø8	7	10	-
ø12	7	11	14
ø16	11	16	22
ø20	22	30	37
ø25	23	30	37

How to order discrete shock absorber stopper

- Shock absorber set
- Use when changing from the stroke adjusting stopper to the shock absorber stopper

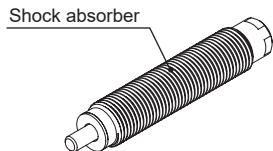**LCR - 12 - A01**Bore size
(Page 27 Item A)


Note: Some models may not be available depending on the specifications. Refer to page 27. For the adjustable stroke range for a shock absorber stopper, refer to the stopper dimensions table in "Pneumatic Cylinders II (No. CB-030SA)".

Applicable shock absorber model No.

Model	Shock absorber model No.	Weight (g)
LCR-6-HP1	SKL-0804	9
LCR-8-HP1	SKL-0805	12
LCR-12-HP1	SKL-0805	12
LCR-16-HP1	SKL-1006	19
LCR-20-HP1	SKL-1208	31
LCR-25-HP1	SKL-1208	31

How to order discrete stopper block

- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

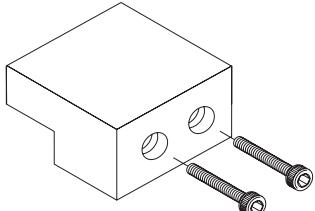**LCR - 12 - SB1 T**Bore size
(Page 27 Item A)**A Stopper block**

SB1	ø6/ø8: For 30 Stroke or less ø12 to ø25: For 50 Stroke or less
SB2	ø6/ø8: For 40 Stroke or more ø12 to ø25: For 75 Stroke or more

B Material

Blank	Stopper block material: Steel
T	Stopper block material: steel (nitriding)

● Discrete stopper block weight (Unit : g)

Block	SB1(T)	SB2(T)
ø6	11	21
ø8	14	24
ø12	23	37
ø16	38	72
ø20	60	99
ø25	112	206

Model No. of plug kit for side piping port


LCR - 12 - N (2/set)Bore size
(Page 27 Item A)**● Weight of plug kit for side piping port**

Bore size	Weight (g)
ø8	1
ø12	1
ø16	1
ø20	5

LCR repair parts list

Bore size (mm)	Kit No.	Part name
ø6	LCR-6K-HP1	Rod packing
ø8	LCR-8K-HP1	Metal gasket
ø12	LCR-12K-HP1	Cushion rubber R/H
ø16	LCR-16K-HP1	Piston packing
ø20	LCR-20K-HP1	Cover gasket
ø25	LCR-25K-HP1	Lube keeping structure

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

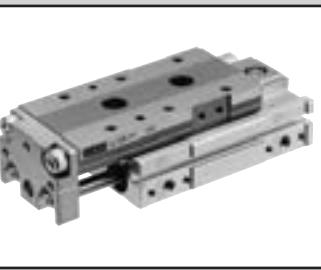

Linear slide cylinder Double acting/single rod

Long service life cylinder

LCG-HP1 Series

● Bore size: ø6/ø8/ø12/ø16/ø20/ø25

JISCode



Specifications

Item	LCG-HP1						
LCG	Bore size mm	ø6	ø8	ø12	ø16	ø20	ø25
STM	Actuation	Double acting					
STG	Working fluid	Compressed air					
STR2	Max. working pressure MPa			0.7			
SCPD3	Min. working pressure MPa			0.15 (*1)			
CMK2	Proof pressure MPa			1.05			
SCM	Ambient temperature °C	-10 to 60 (no freezing)					
SCG	Port size	Main body side	M3	M5	Rc1/8		
SSD2		Main body back		M3	M5	Rc1/8	
SMG	Stroke tolerance mm			+2.0 0	(*2)		
LCR	Working piston speed mm/s			50 to 500 (*3)			
STG	STS	Cushion	With rubber cushion				
STL	LSH-A	Lubrication	Not required				
LSH-G	LSH-F	Allowable absorbed energy J	Table below.				

*1: 0.2 MPa when using ø6 shock absorber type stopper.

*2: Note that there will be a slight gap between the end plate and floating bush if no stopper is attached.

*3: Keep within 50 to 200 mm/s when using a stroke adjusting stopper.

*4: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.

Stroke

	Bore size (mm)	Standard Stroke (mm)
LSTM	ø6	10, 20, 30, 40, 50
	ø8	10, 20, 30, 40, 50, 75
ABP2	ø12	10, 20, 30, 40, 50, 75, 100
SCPD3	ø16	10, 20, 30, 40, 50, 75, 100, 125
CMK2	ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
SCM	ø25	10, 20, 30, 40, 50, 75, 100, 125, 150

Note: Products with Strokes other than the above are not available.

Allowable absorbed energy (E_0)

STM	Bore size	Standard (J)	With stroke adjusting stopper(J)	With shock absorber stopper(J)
LCR	ø6	0.025	0.0032	0.14
LCG	ø8	0.058	0.0032	0.25
STR2	ø12	0.112	0.014	0.25
LSH-A	ø16	0.176	0.043	0.65
LSH-G	ø20	0.314	0.055	1.3
LSH-F	ø25	0.314	0.14	1.3

LSHL-A

LSHL-G

LSHL-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

LSH-A

LSH-G

LSH-F

SSD2

STG

SCG

SCM

CMK2

SCPD3

MSD

MSDG-L

SMG

STG

How to order ($\phi 6$ to $\phi 16$)

Without switch (built-in magnet for switch)

LCG - 8 - 40 - S5 - HP1

With switch (built-in magnet for switch)

LCG - 12 - 40 - F2H* - R - A1DT - HP1

Model No.

A Tube
Bore size**B** Stroke**D** Switch quantity
C Switch model No.**▲ Precautions for model No. selection**

- *1: To change the adjustable stroke range, use the discrete stroke adjusting stopper on page 38.
 - *2: For the adjustable stroke range with a shock absorber stopper, refer to the stopper dimensions table in "Pneumatic Cylinders II (No. CB-030SA)".
 - *3: For the port position, refer to the stopper dimensions in "Pneumatic Cylinders II (No. CB-030SA)".
 - *4: The standard port positions without stopper are ① and ③ in the figure below.
 - *5: Combination of the stroke adjusting stopper and shock absorber stopper is made to order.
 - *6: Can be selected for the type with stopper only.
 - *7: Refer to the selection table below for combinations of options.
 - *8: A1**, A2**, A5** and A6** of $\phi 6$ to $\phi 8$ with 10 mm Stroke and $\phi 12$ or $\phi 16$ with 20 mm Stroke or less are made to order since adjustment is not possible with the standard stopper.
 - *9: For the $\phi 6$ to $\phi 8$ 30 stroke or less with S*** or A***, if using two switches, select the F □ H switch.
 - *10: The rust proof type is made to order.
 - *11: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.
 - *12: When changing the stopper position from the head side to the rod side, the stopper must be purchased separately according to the Stroke and adjustable Stroke. Refer to "Precautions when purchasing discrete stopper" on page 38.
- A1, A2 and adjustable Stroke of 15 mm and 25 mm may not be available depending on the Stroke.

[Example of model No.]

LCG-12-40-F2H-R-A1DT-HP1

Model: Linear slide cylinder, double acting/single rod LCG

A Bore size : $\phi 12$ **B** Stroke : 40 mm**C** Switch model No. : Proximity/2-wire


Lead wire straight type

D Switch quantity : 1 (on rod side)**E** Other options : Shock absorber stopper

Stopper position ①

With side and bottom ports

Material, steel (nitriding)



LCG Double acting/single rod selection table

(Combination with stroke adjusting stopper, shock absorber stopper)

○: Available - : Not available

Model No. code	Option code		Stroke adjusting stopper						Shock absorber stopper					
	Bore size	Stroke	S1	S2	S3	S4	S5	S6	A1	A2	A3	A4	A5	A6
LCG	$\phi 6, \phi 8$	10	○	○	○	○	○	○	-	-	○	○	-	-
		20 or more	○	○	○	○	○	○	○	○	○	○	○	○
	$\phi 12$ to $\phi 25$	10 to 20	○	○	○	○	○	○	-	-	○	○	-	-
		30 or more	○	○	○	○	○	○	○	○	○	○	○	○

The table above also applies to combinations with option code D (with port on stopper) or T (steel stopper block (nitriding)).

Code	Description			
A	Bore size			
6	$\phi 6$			
8	$\phi 8$			
12	$\phi 12$			
16	$\phi 16$			

B		Stroke (mm)				Bore size (ϕ)			
		Bore size (ϕ)				6	8	12	16
10	10					●	●	●	●
20	20					●	●	●	●
30	30					●	●	●	●
40	40					●	●	●	●
50	50					●	●	●	●
75	75					●	●	●	●
100	100					●	●	●	●
125	125					●	●	●	●

C									
Lead wire straight	Radial lead wire	Contact	Voltage AC DC	Display lamp	Lead wire	Bore size			
						ø6	ø8	ø12	ø16
-	F2S*	●		1-color display	2-wire				
-	F3S*	●		3-wire					
F2H*	F2V*	●		2-wire					
F3H*	F3V*	●		3-wire					
F3PH*	F3PV*	●	Proximity	1-color display (PNP output) (Made to order)	3-wire	●	●	●	
F2YH*	F2YV*	●	Reed	2-color display	2-wire				
F3YH*	F3YV*	●		3-wire					
T0H*	T0V*	●		1-color display	2-wire				
T5H*	T5V*	●		No indicator lamp					
T2H*	T2V*	●	Proximity	1-color display	2-wire				
T3H*	T3V*	●		3-wire					
T2HR3	T2VR3	●		1-color display Bending resistant lead wire	2-wire				
T3PH*	T3PV*	●		1-color display (PNP output)	3-wire				
T2WH*	T2WV*	●		2-color display	2-wire				
T3WH*	T3WV*	●		3-wire					

*** Lead wire length**

Blank	1 m (standard)	●
3	3 m (option)	●
5	5 m (option)	●

D Switch quantity

R	1 on rod side	
H	1 on head side	
D	2	

E Option

Blank	No option
-------	-----------

S Stroke adjusting stopper

Stroke adjustable by 5 mm on one side	*1, *5, *7, *11
S1**	Stopper position ① (can be changed to ④)
S2**	Stopper position ② (can be changed to ③)
S3**	Stopper position ③ (can be changed to ②)
S4**	Stopper position ④ (can be changed to ①)
S5**	Stopper position ①, ③
S6**	Stopper position ②, ④

A Shock absorber stopper

A1**	Stopper position ① (can be changed to ④)	
A2**	Stopper position ② (can be changed to ③)	
A3**	Stopper position ③ (can be changed to ②)	*12
A4**	Stopper position ④ (can be changed to ①)	*12
A5**	Stopper position ①, ③	
A6**	Stopper position ②, ④	

**** part**

Blank	Port on stopper: without port	
D	Port on stopper: side and bottom ports	*3, *6
Blank	Stopper block material: steel	
T	Stopper block material: steel (nitriding)	*6

Plug included

Blank	No	
N	With side piping port plug (not available for ø6)	

SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHM-A	
LSHM-G	
LSHM-F	
LST	
LSTM	
ABP2	

LCG-HP1 Series

How to order ($\phi 20$, $\phi 25$)

Without switch (built-in magnet for switch)

LCG - 20 - 40 - S5 - U - HP1

With switch (built-in magnet for switch)

LCG - 20 - 40 - T2H* - R - A1DT - U - HP1

Model No.

A Bore size

B Stroke

C Switch model No.

D Switch quantity

E Anti-rust treatment

STM

STG

STR2

SCPD3

CMK2

SCM

SSD2

MDC2

MSD

MSDG-L

SMG

LCR

LCG

STR2

SCPD3

CMK2

SCM

SSD2

SCG

SMG

LCR

STG

STS

STL

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

Air

Booster

Low-profile long stroke hand

stroke hand

Linear Slide Hand

Environment-resistant cylinder

Long service life cylinder

Supports food mfg. processes

Compatible with rechargeable batteries

Example of model No.]

LCG-20-40-T2H-R-A1DT-HP1

Model: Linear slide cylinder double acting/single rod LCG

A Bore size: $\phi 20$

B Stroke: 40mm

C Switch model No.: Proximity/2-wire
Axial lead wire

D Switch quantity: 1 on rod side

E Other options: Shock absorber stopper
Stopper position①
With side and bottom ports
Material, steel (nitriding)

Consumable parts list

Bore size (mm)	Kit No.	Part name
$\phi 6$	LCG-6K-HP1	Rod packing
$\phi 8$	LCG-8K-HP1	Metal gasket
$\phi 12$	LCG-12K-HP1	Cushion rubber R/H
$\phi 16$	LCG-16K-HP1	Piston packing
$\phi 20$	LCG-20K-HP1	Cover gasket
$\phi 25$	LCG-25K-HP1	Lube keeping structure

Code	Description
A Bore size	
20	$\phi 20$
25	$\phi 25$

Code	Description
B Stroke (mm)	
10	10
20	20
30	30
40	40
50	50
75	75
100	100
125	125
150	150

Code	Description
C Switch model No.	
Lead wire straight	Radial lead wire
T0H*	T0V*
T5H*	T5V*
T2H*	T2V*
T3H*	T3V*
T3PH*	T3PV*
T2HR3	T2VR3
T2WH*	T2WV*
T3WH*	T3WV*
D Switch quantity	
R	1 on rod side
H	1 on head side
D	2
E Option	
Blank	No option
F Lead wire length	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

Code	Description
G Stroke adjusting stopper	
H Shock absorber stopper	
S1**	Stopper position ① (can be changed to ④)
S2**	Stopper position ② (can be changed to ③)
S3**	Stopper position ③ (can be changed to ②) *11
S4**	Stopper position ④ (can be changed to ①) *11
S5**	Stopper position ①, ③
S6**	Stopper position ②, ④
I Port on stopper	
A1**	Stopper position ① (can be changed to ④)
A2**	Stopper position ② (can be changed to ③)
A3**	Stopper position ③ (can be changed to ②) *11
A4**	Stopper position ④ (can be changed to ①) *11
A5**	Stopper position ①, ③
A6**	Stopper position ②, ④
J Stopper block material	
Blank	Steel
T	Steel (nitriding) *6
K Stopper mounting position	
①	Front
②	Side
③	Bottom
④	Front and side

Code	Description
L Plug included	
Blank	No
N	With side piping port plug (not available for $\phi 25$)
M Anti-rust treatment	
Blank	No
U	Anti-rust treated product (table guide) *9

Code	Description
N Stopper position	
①	Front
②	Side
③	Bottom
④	Front and side
O Stopper block material	
Blank	Steel
T	Steel (nitriding) *6
P Stopper mounting position	
①	Front
②	Side
③	Bottom
④	Front and side

Code	Description
Q: Anti-rust treated product ($\phi 20, 25$)	
Anti-corrosion treatment is applied to the table surface and rail surface to reduce the occurrence of rust in humid environments such as near ionizers. The table and rail are black.	
Blank	
U	Anti-rust treated product (table guide) *9

How to order switch

ø6 to ø12


SW - F2HSwitch model No.
(Page 35 Item C)

For ø16 to ø25

SW - T2H3Switch model No.
(Pages 35 and 36 Item C)

How to order a stopper set

- Set of a stopper and stroke adjusting stopper or shock absorber stopper
- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

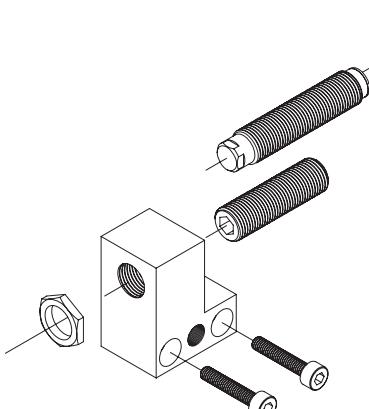**LCG - 12 - S 2 D - S02**Bore size
(Pages 35 and 36 Item A)

*1: Stopper mounting position①, ② When installing on (refer to pages 35 and 36), the stroke causes changes in the adjustable Stroke; see the following table.

*2: ø6 and ø8 are not available for S03.

*3: Cannot be selected for the shock absorber stopper "A".

A Stopper type

S	Stroke adjusting stopper
A	Shock absorber stopper

B Stopper mounting position *1

1	Stopper position ① or ④
2	Stopper position ② or ③

C Port on the stopper

Blank	Without port
D	With side and bottom ports

D Adjustable Stroke *2/*3

Blank	Adjustable stroke range 5 mm
S02	Adjustable stroke range 15 mm
S03	Adjustable stroke range 25 mm

Precautions when purchasing the stopper set

Installation position ①, ② (Pages 35 and 36), add the part shown on the right according to the Stroke and adjustable Stroke.

Model No. code	Option code		Discrete stroke adjusting stopper		
			Adjustable Stroke (mm)		
Bore size	Stroke	-5	-15	-25	
LCG Series	ø6, ø8	10	S02	-	-
		20 or more	Blank	S02	-
	ø12 to ø25	10	S03	-	-
		20	S02	S03	-
		30 or more	Blank	S02	S03

● Stopper set weight

(Unit: g)

Stopper port	S1, S2		A1, A2	
Port on stopper	Blank, D			
Adjustable Stroke	Blank	S02	S03	Blank
ø6	15	18	-	18
ø8	21	25	-	27
ø12	28	31	34	33
ø16	42	47	52	49
ø20	77	85	92	86
ø25	87	94	101	95

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCG Series

How to order discrete stroke adjusting stopper

- Hexagon socket set screw with urethane
- Use when changing the adjustable stroke range or when using a custom Stroke.



LCG - 12 - S02

Bore size
(Pages 35 and 36 Item A)

A Adjustable stroke range

S01	Single side 5 mm (standard)
S02	Single side 15 mm
S03	Single side 25 mm

● Select S01, S02 or S03 in .

Note: S03 is not available for ø6 and ø8. Some models may not be available and adjustable stroke range may differ from the above depending on the Model No.

- : Not available

Precautions when purchasing discrete stopper

- Attach the discrete stroke adjusting stopper and the discrete shock absorber stopper.①,② (Pages 35 and 36) When the stopper set is installed in the , note that the combination will be as shown on the right according to the Stroke and adjustable Stroke.

Model No. code	Option code	● Discrete stroke adjusting stopper			Discrete shock absorber stopper
		Adjustable Stroke (mm)	-5	-15	
LCG Series -S1, S2, S5, S6 -A1, A2, A5, A6	ø6, ø8	10	S02	-	-
	20 or more	S01	S02	-	A01
	10	S03	-	-	-
	ø12 to ø25	20	S02	S03	-
	30 or more	S01	S02	S03	A01


- Discrete stroke adjusting stopper weight

(Unit: g)

Adjustable stroke range	S01	S02	S03
ø6	6	9	-
ø8	7	10	-
ø12	7	11	14
ø16	11	16	22
ø20	22	30	37
ø25	23	30	37

How to order discrete shock absorber stopper

- Shock absorber set
- Use when changing from the stroke adjusting stopper to the shock absorber stopper

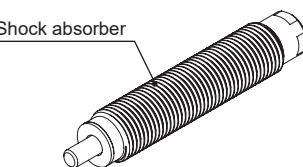

LCG - 12 - A01

Bore size
(Pages 35 and 36 Item A)


Note: Some models may not be available depending on the specifications. Pages 35 and 36. The adjustable stroke range of the shock absorber stopper is "Pneumatic Cylinders II (No.CB-030SA)".

Applicable shock absorber model No.

Model	Shock absorber model No.	Weight (g)
LCG-6	SKL-0804	9
LCG-8	SKL-0805	12
LCG-12	SKL-0805	12
LCG-16	SKL-1006	19
LCG-20	SKL-1208	31
LCG-25	SKL-1208	31

How to order discrete stopper block

- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

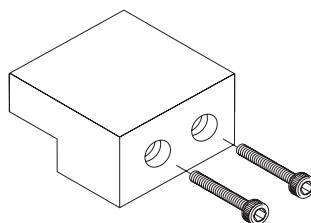

LCG - 12 - SB1 T

Bore size
(Pages 35 and 36 Item A)

A Stopper block

SB1	ø6/ø8:For 30 Stroke or less ø12/ø25:For 50 Stroke or less
SB2	ø6/ø8:For 40 Stroke or more ø12/ø25:For 75 Stroke or more

B Material

Blank	Stopper block material:Steel
T	Stopper block material : Steel (nitriding)

- Discrete stroke adjusting stopper weight

(Unit: g)

Adjustable stroke range	SB1(T)	SB2(T)
ø6	11	21
ø8	14	24
ø12	23	37
ø16	38	72
ø20	60	99
ø25	112	206

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L



Guided cylinder Double acting/single rod

Long service life cylinder

STM-^M_B-HP1 Series

● Bore size: ø6, ø10

JISCode



SCPD3
CMK2
SCM
SSD2
SMG
LCR
STG
STR2

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

LST

LSTM

ABP2

Specifications

Item		STM-M/B-HP1		
STM	Bore size mm	ø6	ø10	
STG	Actuation	Double acting		
STR2	Working fluid	Compressed air		
SCPD3	Max. working pressure MPa	0.7		
CMK2	Min. working pressure MPa	0.15		
SCM	Proof pressure MPa	1.05		
SSD2	Ambient temperature °C	-10 to 60 (no freezing)		
SMG	Port size	M3		
LCR	LSH-A	+1.5		
STG	LSH-G	0		
STR2	LSH-F			
SCM	LSHL-A			
SSD2	LSHL-G	50 to 500		
MSD	LSHL-F			
MSDG-L	LSHM-A	With rubber cushion		
SMG	LSHM-G			
STG	LSHM-F	Not required		
STR2	LST	Allowable absorbed energy J	0.008	0.054

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke	Min. stroke with switch
ø6	5/10/15	15		
ø10	5/10/15/20	20	5	5

Note: Products other than standard Stroke are made to order.

MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

SCPD3
CMK2
SCM
SCG
SSD2
STG

For dimensions, refer to the STM Series in "Pneumatic Cylinders II (CB-030SA)".

How to order

Without switch (built-in magnet for switch)

STM - M - 10 - 15 - A - HP1

With switch (built-in magnet for switch)

STM - M - 10 - 15 - F2V - D - A - HP1**A** Bearing**B** Bore size**C** Stroke**D** Switch model No.
*1**E** Switch quantity**F** Option

Code	Item
A Bearing	
M	Metal bush bearing
B	Ball bearing

B Bore size (mm)

6	ø6
10	ø10

C Stroke (mm)

	Bore size	
	6	10
5	5	●
10	10	●
15	15	●
20	20	●

D Switch model No.

Lead wire Straight type	Lead wire L-shaped	Contact	Voltage AC	Voltage DC	Display	Lead wire
-	F2S*	Proximity		●	1-color display	2-wire
F2H*	F2V*			●		3-wire
-	F3S*			●		
F3H*	F3V*			●		
F3PH*	F3PV*			●	1-color display (PNP output) (made to order)	3-wire
F2YH*	F2YV*			●	2-color display	2-wire
F3YH*	F3YV*			●		3-wire

* Lead wire length

Blank	1 m (standard)
3	3 m (option)

E Switch quantity

R	1 on rod side
H	1 on head side
D	2

F Option

A	Side mounting
R	Rear piping

⚠ Precautions for model No. selection

*1: When using a 2-color display proximity switch for STM-B-6, avoid mounting the cylinder on a magnetic substance such as a metal plate. This could lead to switch detection malfunction.

[Example of model No.]**STM-M-10-15-F2H-D-A-HP1**

Model: Guided cylinder

- A** Bearing : Metal bush bearing
- B** Bore size : ø10 mm
- C** Stroke : 15 mm
- D** Switch model No. : Proximity F2H switch, lead wire 1 m
- E** Switch quantity : 2 pcs. included
- F** Option : Side mounting

How to order switch**SW - F2V**Switch model No.
(Item **D** above)

SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
SCPD3	Long service life cylinder
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	

Long service cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR

Guided cylinder Double acting/single rod

Long service life cylinder

STG-M-B-HP1 Series

● Bore size: ø12/ø16/ø20/ø25/ø32/ø40

JISCode



Environment-resistant cylinder

SCPD3
CMK2
SCM
SSG2
STR2
STG
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Linear Slide Hand

LSHM-A
LSHM-G
LSHM-F
LST
LSTM
ABP2

Low-profile long stroke hand

SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Compatible with rechargeable batteries

SCPD3
CMK2
SCM
SSG2
STR2
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STG

Specifications

Item	STG-M/B-HP1					
LCG	ø12	ø16	ø20	ø25	ø32	ø40
STM	Actuation					
STG	Double acting					
STR2	Working fluid					
SCPD3	Compressed air					
CMK2	Max. working pressure MPa					
SCM	1.0					
SSG2	Min. working pressure MPa					
STR2	0.15					
SCG	Proof pressure MPa					
SSG2	1.6					
STR2	Ambient temperature °C					
SCG	-10 to 60 (no freezing)					
SSG2	Port size					
STR2	M5					
SCG	Rc1/8					
SSG2	Stroke tolerance mm					
STR2	+2.0					
SCG	0					
SSG2	Working piston speed mm/s					
STR2	50 to 500					
SCG	Cushion					
SSG2	With rubber cushion					
STR2	Lubrication					
SCG	Not required					
SSG2	LSH-A	0.056	0.088	0.157	0.157	0.401
STR2	LSH-G					0.627
SCG	LSH-F					
SSG2	LSHL-A					
STR2	LSHL-G					
SCG	LSHL-F					

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch(mm)
ø12	10/20/30/40/50			
ø16	75/100/125/150			
ø20	20/30/40/50/75			
ø25	100/125/150			
ø32	25/50/75/100			
ø40	125/150			
LST		150	5	5(10) *2
LSTM				

*1: The custom Stroke is available in 5 mm increments. However, the total dimensions are the same as the longer standard Stroke.

A dedicated body with dimensions matched to the Stroke is available. Contact CKD for details.

*2: For types with one or two switches. The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

For dimensions, refer to the STG Series in "Pneumatic Cylinders II (CB-030SA)".

How to order

Without switch (built-in magnet for switch)

STG - **M** - **25** - **30** - **HP1**

With switch (built-in magnet for switch)

STG - **M** - **25** - **30** - **T2H** - **R** - **HP1**

Model No.

A Bearing**B** Bore size**C** Port thread**D** Stroke**E** Switch model
No. *1 *3 *4

⚠ Precautions for model No. selection

*1: Switches other than **E** Switch model No. are also available. (Made to order)

Refer to "Pneumatic Cylinders II (No. CB-030SA)" for details.

*2: Copper and PTFE free as standard for STG-B-12 to 32.

*3: T8H/V switch cannot be installed on STG-12 or 16.

*4: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

*5: The total dimensions are the same as the longer standard Stroke.

*6: A dedicated body with dimensions matched to the Stroke is available.

Contact CKD for details.

*7: The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

[Example of model No.]

STG-B-25-30-T0H-D-HP1

Model: Guided cylinder, double acting/single rod

A Bearing method : Ball bearing**B** Bore size : ø25 mm**C** Port thread : Rc thread**D** Stroke : 30 mm**E** Switch model No. : Reed T0H switch
Lead wire length 1 m**F** Switch quantity : 2 pcs. included

How to order switch

SW - **T0V****E** Switch model No.

STG repair parts list

Bore size (mm)	Kit No.	Part name
ø12	STG-12K-HP1	Rod packing
ø16	STG-16K-HP1	Metal gasket
ø20	STG-20K-HP1	Cushion rubber
ø25	STG-25K-HP1	Piston packing
ø32	STG-32K-HP1	O-ring
ø40	STG-40K-HP1	

Code	Description
A Bearing	
M	Metal bush bearing
B	Ball bearing

Bore size (mm)	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40

Port thread	
Blank	M5 (ø12 to ø16) Rc thread (ø20 to ø40)
NN	NPT thread (ø20 or more) (made to order)
GN	G thread (ø20 or more) (made to order)

Stroke (mm)	
Refer to the Stroke table below	

Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage	Display	Lead wire
			AC		
T0H*	T0V*	Reed	●	●	1-color display
T5H*	T5V*		●	●	No indicator lamp
T8H*	T8V*		●	●	1-color display
T1H*	T1V*		●		2-wire
T2H*	T2V*			●	1-color display
T3H*	T3V*			●	3-wire
T2HR3	T2VR3			●	1-color display
T3PH*	T3PV*			●	Bending resistant lead wire
T2WH*	T2WV*			●	3-wire
T2YH*	T2YY*			●	2-wire
T3WH*	T3WV*	Proximity		●	2-color display
T3YH*	T3YY*			●	3-wire
T2JH*	T2JV*			●	1-color display off-delay
T2YD*	-			●	2-wire
T2YDT*	-			●	AC magnetic field

Lead wire length	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

Switch quantity	
R	1 on rod side
H	1 on head side
D	2
T	3

Stroke (mm)	Applicable bore size					
	ø12	ø16	ø20	ø25	ø32	ø40
Standard Stroke	10	●	●			
	20	●	●	●	●	
	25				●	●
	30	●	●	●	●	
	40	●	●	●	●	
	50	●	●	●	●	●
	75	●	●	●	●	●
	100	●	●	●	●	●
	125	●	●	●	●	●
	150	●	●	●	●	●
Min. Stroke *7						5(10)
Custom Stroke *5, *6						In 5 mm increments

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Twin rod cylinder Double acting/standard

Long service life cylinder

STR2-^M_B-HP1 Series

● Bore size: ø6/ø10/ø16/ø20/ø25/ø32

JISCode



Specifications

Item	STR2-M-HP1 (metal bush bearing) STR2-B-HP1 (ball bearing)					
LCG	Bore size mm	ø6	ø10	ø16	ø20	ø25
STM	Actuation	Double acting				
STG	Working fluid	Compressed air				
STR2	Max. working pressure MPa			0.7		
SCPD3	Min. working pressure MPa	0.2	0.15		0.1	
CMK2	Proof pressure MPa			1.05		
SCM	Ambient temperature °C			-10 to 60 (no freezing)		
SCG	Port size			M5		Rc1/8
SSD2	Stroke tolerance mm			+2.0		0
SMG	Adjustable stroke range mm			0 to -5		
LCR	Working piston speed mm/s			50 to 500		
STG	Non-rotating accuracy	STR2-M	±0.4°	±0.3°		±0.2°
STS	(reference value)	STR2-B	±0.2°	±0.1°		±0.3°
STL	Piston rod	STR2-M	Metal bush bearing			
LSH-A	Bearing	STR2-B	Ball bearing			
LSH-G	Cushion		With rubber cushion			
LSH-F	Lubrication		Not required			
LSHM-A	Allowable absorbed energy	PUSH	0.008	0.061	0.181	0.303
LSHM-G	J PULL		0.059	0.083	0.083	0.127
LSHM-F						0.237
						0.311

Stroke

LST	Bore size	Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Available Stroke (mm)	Min. stroke with switch
LSTM	ø6	10,20,30,40,50	50		100	
Air Booster	ø10					
ABP2	ø16					
SCPD3	ø20	10,20,30,40,50	100	5	150	10
CMK2	ø25	60,70,80,90,100				
SCM	ø32		*1			
SSD2						
MSD						

MSDG-L *1: In the case of rear piping:

- ø16: 70
- ø20, ø25: 60
- ø32: 50

SMG *2: The custom Stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard Stroke.

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

LST

Low-profile long stroke hand

Compatible with rechargeable batteries

Supports food mfg. processes

For dimensions, refer to the STR2 Series in "Pneumatic Cylinders II (CB-030SA)".

How to order

Without switch (built-in magnet for switch)

STR2 - M - 16 - 30 - F - HP1

With switch (built-in magnet for switch)

STR2 - M - 16 - 30 - K0H - R - F - HP1

Model No.

A Bearing**B** Bore size**C** Port thread**D** Stroke

*1
■ The custom Stroke is available in 1 mm increments.

E Switch model No.

*2

F Switch quantity**G** Option
*4

Code	Description
A Bearing	
M	Metal bush bearing
B	Ball bearing

B Bore size(mm)

6	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Port thread

Blank	Rc thread
NN	NPT thread (ø32 only) (made to order)
GN	G thread (ø32 only) (made to order)

*5

D Stroke(mm)

Bore size	Stroke	Available Stroke	Custom Stroke
ø6	5 to 50	100	In 1 mm increments
ø10	5 to 50		
ø16	5 to 100		
ø20	5 to 100		
ø25	5 to 100		
ø32	5 to 100		

E Switch model No.

Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage AC DC	Indicator	Lead wire
K0H*	K0V*	Reed	● ●	1-color display	2-wire
K5H*	K5V*		● ●	No indicator lamp	2-wire
K2H*	K2V*		●	1-color display	2-wire
K3H*	K3V*		●	1-color display (made to order)	3-wire
K3PH*	K3PV*		●	1-color display (made to order)	3-wire
K2YH*	K2YV*		●	2-color display	2-wire
K3YH*	K3YV*		●	2-color display	3-wire
* Lead wire length					
Blank	1 m (standard)	Proximity			
3	3 m (option)				
5	5 m (option)				

F Switch quantity**G** Option

F	End plate material: steel
O	Piping port position 180°Change
R	Rear piping

⚠ Precautions for model No. selection

*1: The max Stroke of rear piping "R" is:


- ø6/10 : 50 stroke
- ø16 : 70 stroke
- ø20/25 : 60 stroke
- ø32 : 50 stroke.

*2: STR2-B-6 and 10 are not compatible with reed switches.

*3: The ball bearing is copper and PTFE free "P6" as standard.

*4: The piping port positions for "O" are as shown in the figure below.

Piping port positions for standard (blank)

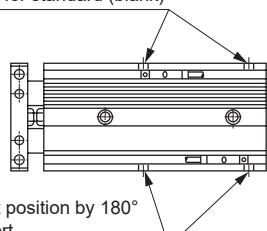Change piping port position by 180°
(Code: 0) piping port

*5: For G thread, ports on the opposite side (option "O") are not available. Rather than plug sealing, they are simply not provided.

(The standard ports are not provided for option "O".)

[Example of model No.]**STR2-M-16-30-K0H-R-F-HP1**

Model: Twin rod cylinder, standard

- A** Bearing : Metal bush bearing
B Bore size : ø16 mm
C Port thread : Rc thread
D Stroke : 30 mm
E Switch model No.: Reed K0H switch
F Switch quantity : 1 on rod side
G Option : End plate material: Steel

Discrete switch model No.**Display method****SW - K0H***Switch model No.
(Item **E** above)**Consumable parts list**

Bore size(mm)	Kit No.	Part name
ø6	STR2-6K-HP1	Cushion rubber R/H O-ring Rod packing Piston packing Wear ring
ø10	STR2-10K-HP1	
ø16	STR2-16K-HP1	
ø20	STR2-20K-HP1	
ø25	STR2-25K-HP1	
ø32	STR2-32K-HP1	

Note: Specify the kit No. when placing an order.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

Environment-resistant cylinder

HP1 Series



CONTENTS

● Pencil shaped cylinder (SCPD3-G-HP1)	48
● Small bore size cylinder (CMK2-G-HP1)	52
● Round shaped cylinder (SCM-G-HP1)	56
● Tie rod cylinder (SCG-G-HP1)	62
● Compact cylinder (SSD2-G-HP1)	66
● Compact cylinder (SMG-G-HP1)	70
● Linear Slide Hand (LCR-G-HP1)	74
● Guided cylinder (STG-G-HP1)	96
● Guided cylinder (STS/STL-G-HP1)	102
⚠ Precautions for use	222

Environment-resistant cylinder series variation

Model No.	Bore size (mm)	Stroke (mm)
SCPD3-G-HP1	ø6/ø10/ø16	5 to 270
CMK2-G-HP1	ø20/ø25/ø32/ø40	5 to 750
SCM-G-HP1	ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	10 to 1500
SCG-G-HP1	ø32/ø40/ø50/ø63/ø80/ø100	1 to 1500
SSD2-G-HP1	ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	1 to 100
SMG-G-HP1	ø6/ø10/ø16/ø20/ø25/ø32	5 to 100
LCR-G-HP1	ø6/ø8/ø12/ø16/ø20/ø25	10 to 150
STG-G-HP1	ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	5 to 400
STS-G-HP1	ø8/ø12/ø16/ø20/ø25/ø32/ ø40/ø50/ø63/ø80/ø100	5 to 100
STL-G-HP1		30 to 400

⚠ Read the safety precautions in "Pneumatic Cylinders" (Catalog No.CB-029SA and CB-030SA) before use.

⚠ CAUTION

■ Some models use oil-impregnated bearings, and oil may be discharged outside of the cylinder. Do not use in places susceptible to oil.

CKD

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



PencilCylinder
Double acting/single rod/Rubber scraper

Environment-resistant cylinder

SCPD3-G-HP1 Series

● Bore size: $\varnothing 6/\varnothing 10/\varnothing 16$

JIS symbol



Specifications

Item	SCPD3-G-HP1			
	SCPD3-GL-HP1 (with switch)			
LCG	Bore size mm	$\varnothing 6$	$\varnothing 10$	$\varnothing 16$
LCG	STM			
LCG	STG	Actuation	Double acting	
LCG	STR2	Working fluid	Compressed air	
LCG	SCPD3	Max. working pressure MPa	1.0	
LCG	CMK2	Min. working pressure MPa	0.15	0.1
LCG	SCM	Proof pressure MPa	1.6	
LCG	SSD2	Ambient temperature °C	-10 to 60 (no freezing)	
LCG	SMG	Port size	M5	
LCG	LCR	Stroke tolerance mm	$+1.0$	0
LCG	STG			
LCG	STS	Working piston speed mm/s	50 to 750	
LCG	STL	Cushion	With rubber cushion	
LSH-A	Lubrication		Not required	
LSH-G	Allowable absorbed energy J	0.012	0.041	0.162
LSH-F				

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Available Stroke (mm)	Min. Stroke (mm)
$\varnothing 6$	15/30/45/60	100	105	5
$\varnothing 10$		200	210	
$\varnothing 16$		260	270	

*1: The custom Stroke is available in 1 mm increments.

Min. Stroke with switch

Sketch	with 1 pc.		with 2 pcs.	
	Rod side mount	Head side mount	Different surface mounting	Same surface mounting
	5 mm		10 mm	28 mm

Sketch	with 3 pcs.	
	Different surface mounting	Same surface mounting
	38 mm	54 mm

How to order

Without switch(without magnet for switch)

SCPD3-G - 00 - 10 - 15 - O - Y - HP1

With switch(built-in magnet for switch)

SCPD3-GL - 00 - 10 - 15 - O - T2H - R - Y - HP1**A Model No.**

B Mounting *1

C Bore size

D Stroke

E Head side port direction *1

F Switch model No. *3, *6
* indicates the lead wire length.

Code	Description		
A Model No.			
SCPD3-G	Double acting/single rod/rubber scraper		
SCPD3-GL	Double acting/single rod/rubber scraper/with switch		

B Mounting

Bore size (\varnothing)		6	10	16
00	Basic	●	●	●
LS	Axial foot (one side) (rod side)	●	●	●
FA	Rod side flange	●	●	●
CB	Clevis bracket (pin and snap ring attached)	●	●	●

C Bore size (mm)

6	$\varnothing 6$
10	$\varnothing 10$
16	$\varnothing 16$

D Stroke (mm)

Bore size	Stroke *2	Available Stroke	Custom Stroke
$\varnothing 6$	5 to 100	105	In 1 mm increments
$\varnothing 10$	5 to 200	210	
$\varnothing 16$	5 to 260	270	

E Head side port direction

Blank	Vertical
O	Axial direction

F Switch model No.

Lead wire Straight type	Lead wire L-shaped	Contact	Voltage AC	Voltage DC	Indicator	Lead wire
T0H*	T0V*	Reed	●	●	1-color display	2-wire
T5H*	T5V*		●	●	No indicator lamp	
T2H*	T2V*		●	●	1-color display	
T3H*	T3V*		●	●	1-color display Bending resistant lead wire	
T2HR3	T2VR3		●	●	2-wire	
T2WH*	T2WV*		●	●	2-wire	
T3WH*	T3WV*		●	●	2-color display	

*** Lead wire length**

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

G Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

H Accessory

Bore size (\varnothing)		6	10	16
I	Rod eye	●	●	●
Y	Rod clevis (pin and snap ring attached)	●	●	●
B1	Eye bracket	●	●	●
B2	Clevis bracket	●	●	●

Precautions for model No. selection

- *1: "CB" mounting is not available when the port direction is "O" (axial direction).
- *2: Refer to page 48 for the min. Stroke with switch.
- *3: Magnet is not built into the type without switch.
- *4: "I" and "Y" cannot be selected together.
- *5: Copper and PTFE free as standard.
- *6: Switches are shipped with the product.

[Example of model No.]

SCPD3-GL-00-10-30-O-T2H-R-I-HP1

Model: Pencil shaped cylinder

- A Model No. : Double acting/single rod/rubber scraper/with switch
- B Mounting : Basic
- C Bore size : $\varnothing 10$ mm
- D Stroke : 30mm
- E Head side port direction : Axial direction
- F Switch model No. : Proximity switch T2H, lead wire 1 m
- G Switch quantity : 1 on rod side
- H Accessory : Rod eye

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

SCPD3-G-HP1 Series

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2

Environment-resistant cylinder
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Low-profile long stroke hand
LST
LSTM

Compatible with rechargeable batteries
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F


Supports food mfg. processes
SCPD3
CMK2
SCM
SCG
SSD2
STG

How to order switch

● Switch body + mounting bracket set

SCPD3 - T0H - 6

Bore size
(Page 49 Item C)

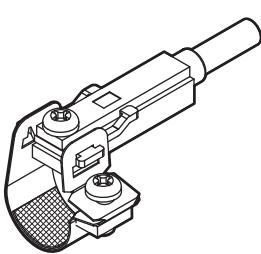


Switch model No.
(Page 49 Item F)

● Switch body (with fixing bracket)

SCPD3 - T0H

Switch model No.
(Page 49 Item F)

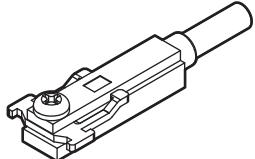


Note) The fixing bracket and cross-recessed pan head machine screw are different from those for the T type standard switch.

● Mounting bracket set + fixing bracket

SCPD3 - TS - 6


Bore size
(Page 49 Item C)

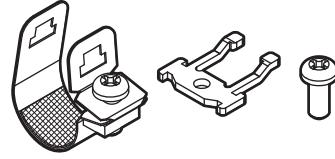

● Mounting bracket set

SCPD3 - T - 6

Bore size
(Page 49 Item C)



How to order mounting brackets


Bore size (mm)	ø6	ø10	ø16
Mounting bracket			
Foot (LS)	P2-LS-6	P2-LS-10	P2-LS-16
Flange (FA)	P2-FA-6	P2-FA-10	P2-FA-16

Note: The foot (LS) type mounting bracket is provided as 1 pc./set.

Dimensions

● SCPD3-G(L)-HP1 basic (00)

● ø6/ø10

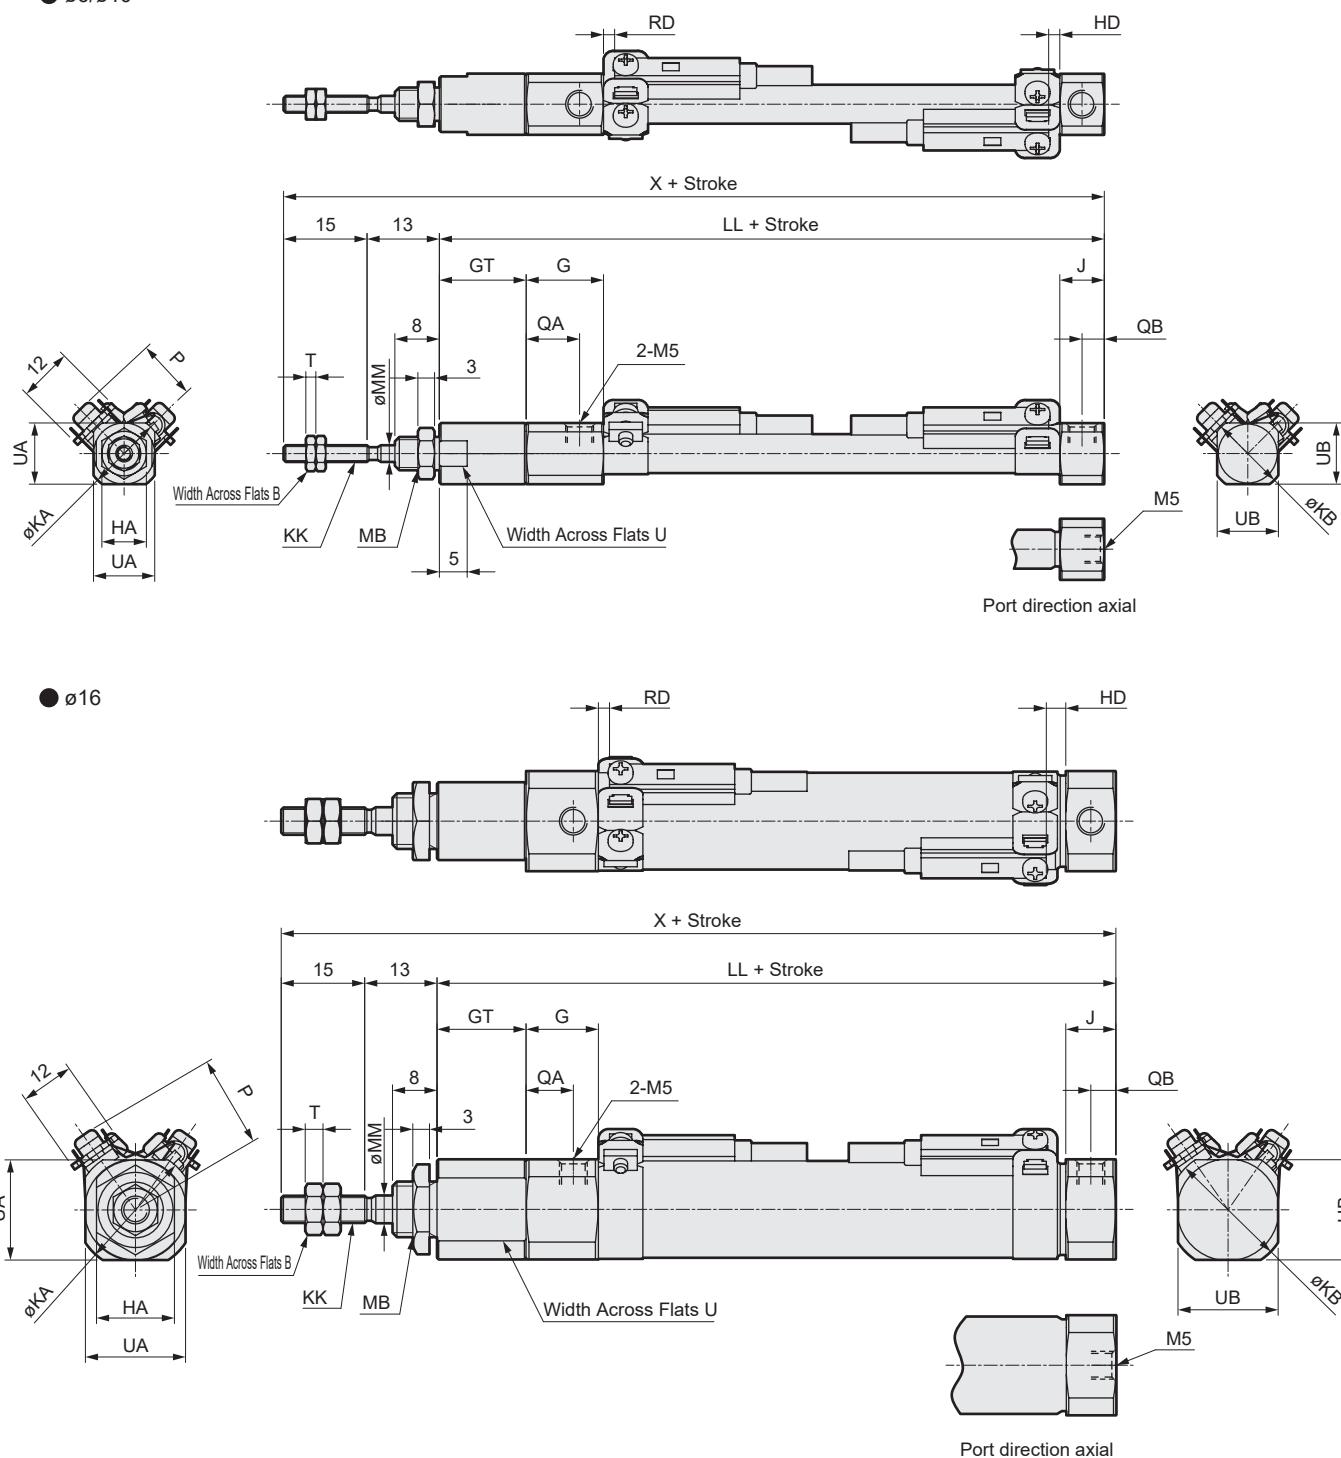

Code	Basic (00) basic dimensions																	With switch					
	Bore size (mm)	B	G	GT	HA	J	KA	KB	KK	LL	MB	MM	QA	QB	T	U	UA	UB	X	T0,T5,T2,T3	T2W,T3W	P	
ø6		5.5	13.5	15.5	8	8	13.5	13.5 (10)	M3	59.5	M6	3	9.5	4	1.8	10	11	11 (9)	87.5	2	2	4	3.5
ø10	7	12.5	16	11	9	14.5	14.5	M4	62	M 8 x 1.0	4	8	4.5	2.4	10	12	12	90	3.5	2.5	5.5	4	13.5
ø16	8	13	16	14	9	21.5	21.5	M5	62	M 10 x 1.0	5	8.5	4.5	3.2	14	18	18	90	2	3.5	3.5	5	17.0

*1: The dimensions is the same in the type without switch. (Magnet is not built in.)

*2: The thread depth of the ø6/ø10 port is 3.8mm. Therefore, use a fitting with 3.8mm or less thread length if necessary.


*3: For the dimensions of the accessories, refer to "Pneumatic Cylinders I (No. CB-029SA)."

*4: Values shown in () are for the type with axial port direction.

* Refer to double acting/single rod in "Pneumatic Cylinders I" (No. CB-029SA) for dimensions of each mounting type.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service life cylinder

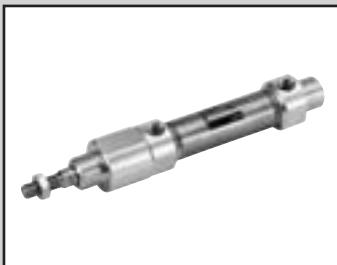SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMGSmall bore size cylinder
Double acting/single rod/rubber scraper

Environment-resistant cylinder

CMK2-G-HP1 Series

● Bore size: ø20/ø25/ø32/ø40

JISCode



Environment-resistant cylinder

LSH-A

LSH-G

LSH-F

Stroke

LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Bore size(mm)	Standard Stroke (mm)	Max. strokeStroke (mm)	Min. Stroke (mm)
ø20			
ø25	25/50/75/100/150/200/ 250/300	750	5
ø32			
ø40			

*1: The custom Stroke is available in 1 mm increments.

*2: One side foot (LS) has the max. Stroke of 50 mm.

Linear Slide Hand

LST

LSTM

Low-profile long stroke hand

ABP2

Min. Stroke with switch

(Unit: mm)

Switch quantity	1					2					3				
	Proximity		Reed			Proximity		Reed			Proximity		Reed		
Bore size (mm)	T2,T3	T2W, T3W	T1,T*Y	T0,T5	T8	T2,T3	T2W, T3W	T1,T*Y	T0,T5	T8	T2,T3	T2W, T3W	T1,T*Y	T0,T5	T8
ø20	10				25	30	35	25	35	50	55	55	50	55	
ø25	10				25	30	35	25	35	50	55	55	50	55	
ø32	10				25	30	35	25	35	50	55	55	50	55	
ø40	10				25	30	35	25	35	50	55	55	50	55	

*1: Up to 3 switches can be mounted.

Compatible with rechargeable batteries

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

Supports food mtg. processes

SCPD3

CMK2

SCM

SCG

SSD2

STG

How to order

Without switch (built-in magnet for switch)

CMK2-G - 00 - 20 - 100 - Y - HP1

With switch (built-in magnet for switch)

CMK2-G - 00 - 20 - 100 - T0H - R - VY - HP1

A Mounting
*1

B Bore size

C Port thread

D Stroke

E Switch model No.

F Switch quantity
*6

G Option
*3

H Accessory
*4

Code	Description
A Mounting	
00	Basic
LB	Axial foot (both sides)
LS	Axial foot (one side)
FA	Rod side flange
FB	Head side flange
CA	Eye bracket
CC	Eye bracket integrated
CC1	Eye bracket, bush pressfit
CB	Clevis Bracket (pin and split washer pin included)
TA	Rod side trunnion
TB	Head side trunnion

Code	Description
20	$\varnothing 20$
25	$\varnothing 25$
32	$\varnothing 32$
40	$\varnothing 40$

Code	Description
Blank	Rc thread
NN	NPT thread (made to order)
GN	G thread (made-to-order product)

Code	Stroke *2	Custom Stroke
	5 to 750	In 1 mm increments

Code	Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage AC / DC	Display	Lead Line
T0H*	T0V*		Reed	● ●	1-color display	2-wire
T5H*	T5V*			● ●	No indicator lamp	
T8H*	T8V*			● ●	1-color display	
T1H*	T1V*		●			2-wire
T2H*	T2V*		●		1-color display	3-wire
T3H*	T3V*		●			
T2HR3	T2VR3			●	1-color display Bending resistant lead wire	2-wire
T3PH*	T3PV*			●	1-color display (made to order)	3-wire
T2WH*	T2WW*			●		2-wire
T2YH*	T2YV*			●	2-color display	3-wire
T3WH*	T3WV*			●		
T3YH*	T3YV*			●		
T2JH*	T2JV*			●	1-color display off-delay	2-wire

Code	Lead wire length
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

Code	Switch quantity
R	1 on rod side
H	1 on head side
D	2
T	3

Code	Option
F	With push-in fitting (straight)
FE	With push-in fitting (elbow)
M	Piston rod material (stainless steel) *7
V	Boss cutoff
P6	Copper and PTFE free *8

Code	Accessory
I	Rod eye
Y	Rod clevis (pin and split washer pin attached)
B2	Clevis bracket (pin and snap ring included)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Short stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Precautions for model No. selection

*1: One side foot (LS) has the max. Stroke of 50 mm.

*2: Refer to page 52 for the min. Stroke with switch.

*3: F; with push-in fitting (straight), FE; The compatible tube O.D. of push-in fitting (elbow) is $\varnothing 6$.

*4: "I" and "Y" cannot be selected together.

*5: Refer to "Pneumatic Cylinders I (Catalog No. CB-029SA)" for made-to-order specifications of rod end form.

*6: Up to three switches can be installed. If four or more switches are required, switch mounting brackets for the extra switches must be prepared separately.

*7: For 20 or 25 bore size, the rod is stainless steel as standard and the rod nut is zinc chromate. If a stainless steel rod nut is necessary, select the "M" option code.

*8: "CC1" mounting is not available for copper and PTFE free (P6).

[Model No. example]

CMK2-G-00-20-100-T0H-R-VY-HP1

Model: Small bore size cylinder double acting

A Mounting : Basic

B Bore size : $\varnothing 20$ mm

C Port thread : Rc thread

D Stroke : 100 mm

E Switch model No. : Reed T0H switch, lead wire 1m

F Switch quantity : 1 on rod side

G Option : Boss cutoff

H Accessory : Rod clevis

CMK2-G-HP1 Series

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM

Environment-resistant cylinder
STG
STR2
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Low-profile long stroke hand
LST
LSTM

Air Booster
ABP2

Compatible with rechargeable batteries
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes
SCPD3
CMK2
SCM
SCG
SSD2
STG

How to order switch

- Switch body + mounting bracket set

CMK2 - T0H - 20

Bore size (page 53 Item B)

Switch model No. (page 53 Item E)

- Switch body only

SW - T0H

Switch model No. (page 53 Item E)

- Mounting bracket set

CMK2 - T - 20

Bore size (page 53 Item B)

Mounting bracket

How to order mounting brackets

Bore size (mm) Mounting bracket *2	ø20	ø25	ø32	ø40 *1
Basic (00) *4	M1-00-20	M1-00-30	M1-00-30	M1-00-30 (for head side)
Axial foot (LB/LS) *3	M1-LB-20	M1-LB-30	M1-LB-30	M1-LB-30(For head side) CMK2-G2-40-LS (LS, LB rod side)
Flange (FA/FB)	M1-FA-20	M1-FA-30	M1-FA-30	CMK2-G2-40-FA(FA) M1-FA-30(FB)
Trunnion (TA/TB)	M1-TA-20	M1-TA-30	M1-TA-30	CMK2-G2-40-TA(TA) M1-TA-40(TB)
Eye bracket (CA)	M1-CA-20	M1-CA-30	M1-CA-30	M1-CA-30
Clevis bracket (CB)	M1-CB-20	M1-CB-30	M1-CB-30	M1-CB-30

*1: The rod cover nut, LS bracket (LB rod side), FA bracket and TA bracket for ø40 bore size are not the standard.

*2: Mounting nuts and toothed washers are included with the axial foot type and flange type. The trunnion type includes mounting nuts. However, toothed washers are not included with ø40, 00, LB (rod side), LS and FA.

*3: For axial foot types (two-sided), 2 sets of the "M1-LB-*1" in the table above are required. For ø40, the brackets used on the rod side and head side are different.
Refer to the table above for details.


*4: Mounting nut, toothed washer only. Although 1 set is included with the basic product (00) (only mounting nuts are included with the ø40), use them when needed.

Dimensions








Basic (00)

• ø20

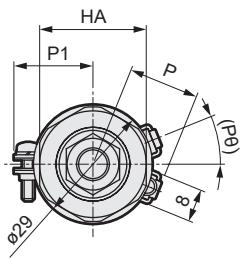

• ø25 to ø40

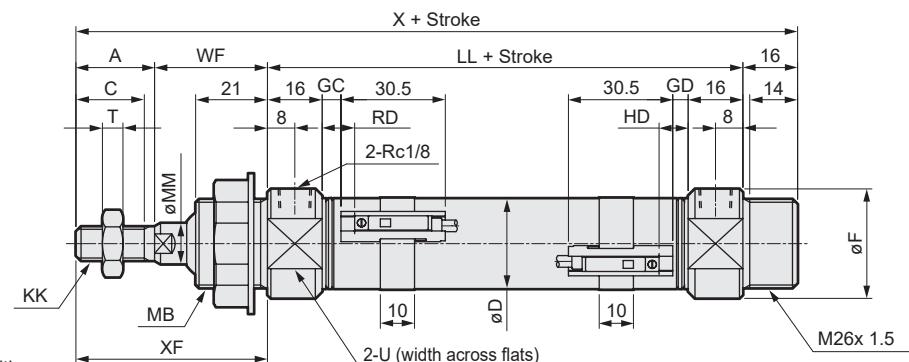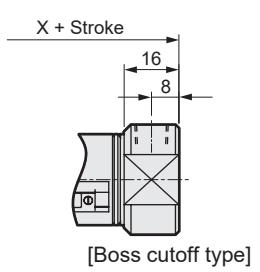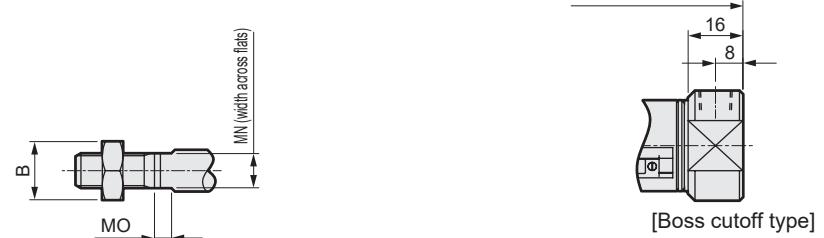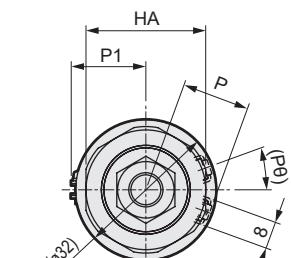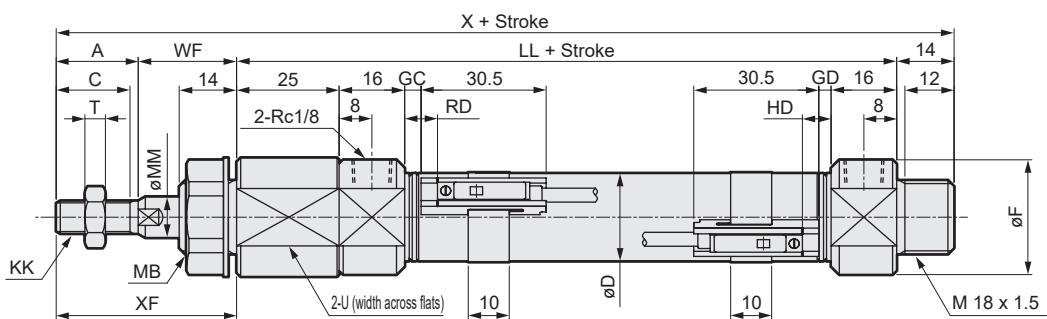RD: Rod side max. sensitivity position
HD: Head side max. sensitivity position

Code	Basic (00) basic dimensions																
	A	B	C	D	F	HA	KK	LL	MB	MM	MN	MO	T	U	WF	X	XF
ø20	20	13	18	21.4	28	26	M 8 x 1.0	91	M 18 x 1.5	10	8	5	5	24	24	149	44
ø25	23	17	20	26.4	32	35	M 10 x 1.25	69	M 26 x 1.5	12	10	5	6	30	33	141	56
ø32	23	17	20	33.6	36	35	M 10 x 1.25	69	M 26 x 1.5	12	10	5	6	34	33	141	56
ø40	25	19	22	41.6	45	38	M 12 x 1.5	73	M 30 x 1.5	14	12	6	7	43	33	147	58

Code	With switch										Boss cutoff type							
	T0,T5,T2,T3				T2W,T3W				P	P1	(Pθ)°	X						
Bore size (mm)	GC	GD	RD	HD	GC	GD	RD	HD	P	P1	(Pθ)°	X						
ø20	4	3	8	7	6	5	10	9	17.3	19.5	22	135						
ø25	5.5	4.5	9.5	8.5	7.5	6.5	11.5	10.5	19.8	22.0	18	125						
ø32	5.5	4.5	9.5	8.5	7.5	6.5	11.5	10.5	24.3	25.5	15	125						
ø40	7.5	6.5	11.5	10.5	9.5	8.5	13.5	12.5	28.3	29.5	12	131						

1: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for HD, RD and protruding dimensions of T1, T8* switches and 2-color display switches.
 *2: For the dimensions of accessories, "Pneumatic Cylinders I (No. CB-029SA)".

*3: ø40 is not supplied with toothed washer.

* Refer to double acting/single rod in "Pneumatic Cylinders I" (No. CB-029SA) for dimensions of each mounting type.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
LCG	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L



Round shaped cylinder
Double acting/single rod/rubber scraper

Environment-resistant cylinder

SCM-G-HP1 Series

● Bore size: ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100

JISCode



Specifications

Item	SCM-G-HP1														
LCG	Bore size mm	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100						
STM	Actuation	Double acting													
STG	Working fluid	Compressed air													
STR2	Max. working pressure MPa	1.0													
SCPD3	Min. working pressure MPa	0.1	0.15	0.1											
CMK2	Proof pressure MPa	1.6													
SCM	Ambient temperature °C	-10 to 60 (no freezing)													
SCG	Port size	With rubber cushion	Rc1/8			Rc1/4	Rc3/8	Rc1/2							
SSD2		With air cushion	M5	Rc1/8		Rc1/4	Rc3/8	Rc1/2							
SMG	Stroke tolerance mm	With rubber cushion	+1.4 0	(up to 1000) (up to 1500)	+1.40 0	+2.3 0	+2.7 0	(up to 1000), (1001 to 1500)							
LCR		With air cushion	+1.4 0	(up to 1000) (up to 1500)	+1.40 0	+1.4 0	+1.8 0	(up to 1000), (1001 to 1500)							
STG	Working piston speed mm/s	30 to 1000 (Operate within the allowable absorbed energy.)													
STS	Cushion	Either rubber cushion or air cushion can be selected.													
STL	Effective air cushion length mm	8.1	8.1	8.6	8.6	13.4	13.4	15.4	15.4						
LSH-A	Lubrication	Not required													
LSH-G	Allowable absorbed energy J	With rubber cushion	0.1	0.2	0.5	0.9	1.6	1.6	3.3	5.8					
LSH-F		With air cushion	0.8	1.2	2.5	3.7	8.0	14.4	25.4	45.6					
LSHL-A		Without cushion	-	-	-	-	0.057	0.057	0.112	0.153					

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke(mm)	Min. Stroke (mm)
ø 20			
ø25			
ø32			
ø40	25, 50, 75, 100, 125, 150, 200, 250, 300	1000	
ø50			10
ø63			
ø80			
ø100		1500	

*1:The custom Stroke is available in 1 mm increments.

Number of installed switches and min. Stroke (mm)

● Switch mounting: Rail

Switch quantity	1			2			3			4			5							
	Proximity			Reed																
Bore size (mm)	T2,T3	T2W,T3W	T*Y*																	
MSD	ø20	10			25			50	70	70	55	55	70	70	55	75	110	110	90	
MSDG-L	ø25	10			25			50	70	70	55	55	70	70	55	75	110	110	90	
SMG	ø32	10			25			50	70	70	55	55	70	70	55	75	110	110	90	
STG	ø40	10			25			50	70	70	55	55	70	70	55	75	110	110	90	
STM	ø50	10			25			50	65	65	55	55	65	65	55	75	110	110	90	
LCR	ø63	10			25			50	65	65	55	55	65	65	55	75	110	110	90	
LCG	ø80	10			25			50	65	65	55	55	65	65	55	75	110	110	90	
	ø100	10			25			50	65	65	55	55	65	65	55	75	110	110	90	

*1:For types with one switch and a Stroke of 10mm or more and less than 25mm, trunnion mounting is not available since the switch rail mounting position is changed. For the mounting position, refer to "Pneumatic Cylinders I (No. CB-029SA)".

● Switch mounting: Band

Switch quantity	1			2			3			4			5								
	Proximity			Reed																	
Bore size (mm)	T2,T3	T2W,T3W	T*Y*																		
SCPD3	ø20	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
CMK2	ø25	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
SCM	ø32	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
SCG	ø40	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
SSD2	ø50	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
STG	ø63	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
	ø83	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	
	ø100	10			25	30	35	25	50	55	55	50	70	75	80	70	95	100	100	95	

How to order

Without switch(built-in magnet for switch)

SCM-G-LB-40B-100-MI-HP1

With switch(built-in magnet for switch)

SCM-G-LB-40B-100-T2H-D-MI-HP1**A** Mounting
*1**B** Bore size**C** Port thread**D** Cushion**E** Stroke**F** Switch model No.

*3

*4

G Switch quantity**H** Switch mounting**I** Option
*6**J** Accessory
*7

Code	Description												
A Mounting													
Bore size (ø)		20	25	32	40	50	63	80					
00	Basic	●	●	●	●	●	●	●					
LB	Axial foot	●	●	●	●	●	●	●					
FA	Rod side flange	●	●	●	●	●	●	●					
FB	Head side flange	●	●	●	●	●	●	●					
CA	Eye bracket	●	●	●	●	●	●	●					
CB	Clevis bracket (pin and snap ring attached)							●					
TA	Rod side trunnion	●	●	●	●	●	●	●					
TB	Head side trunnion	●	●	●	●	●	●	●					
B Bore size (mm)													
20	ø20												
25	ø25												
32	ø32												
40	ø40												
50	ø50												
63	ø63												
80	ø80												
100	ø100												
C Port thread													
Blank	Rc thread												
N	NPT thread (made to order) With air cushion: ø32 and over												
G	G thread (made to order) With air cushion: ø32 and over												
D Cushion													
B	With two-sided air cushion												
R	Rod side air cushioned												
H	Head side air cushioned												
D	With two-sided rubber cushion												
E Stroke (mm)													
Bore size		Stroke *2		Custom Stroke									
ø20 to ø32		10 to 1000											
ø40 to ø100		10 to 1500		In 1 mm increments									
F Switch model No.													
Lead wire Straight type	Lead wire L-shaped type	Voltage AC DC	Reed Contact	Display			Lead wire						
TOH*	T0V*	●	●	1-color display			2-wire						
T5H*	T5V*	●	●	No indicator lamp			3-wire						
T8H*	T8V*	●	●	1-color display			2-wire						
T1H*	T1V*	●		1-color display			3-wire						
T2H*	T2V*	●		Bending resistant lead wire			2-wire						
T3H*	T3V*	●		1-color display (made to order)			3-wire						
T2HR3	T2VR3	●		2-color display			2-wire						
T3PH*	T3PV*	●		2-color display			3-wire						
T2WH*	T2WV*	●		AC magnetic field			2-wire						
T2YH*	T2YV*	●		1-color display off-delay			2-wire						
T3WH*	T3WV*	●		1 m (standard)			3-wire						
T3YH*	T3YV*	●		3 m (option)			2-wire						
T2YD*	-	●		5 m (option)			3-wire						
T2YDT*	-	●		2-color display			2-wire						
T2JH*	T2JV*	●		2-color display			3-wire						
G Switch quantity													
H Switch mounting													
I Option *6													
J Accessory *7													

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

How to order

Without switch(built-in magnet for switch)

SCM-G-LB-40B-100-MI-HP1

With switch(built-in magnet for switch)

SCM-G-LB-40B-100-T2H-D-MI-HP1**A** Mounting
*1**B** Bore size**C** Port thread**D** Cushion**E** Stroke**F** Switch model No.

*3

*4

G Switch quantity**H** Switch mounting**I** Option
*6**J** Accessory
*7

[Example of model No.]

SCM-G-LB-40B-100-T2H-D-MI-HP1

Model: Round shaped cylinder, double acting

A Mounting : Axial foot**B** Bore size : ø40 mm**C** Port thread : Rc thread**D** Cushion : With two-sided air cushion**E** Stroke : 100 mm**F** Switch model No. : Proximity T2H switch, lead wire 1 m**G** Switch quantity : 2 pcs. included**H** Switch mounting : Rail**I** Option : Piston rod material (stainless steel)**J** Accessory : Rod eye

SCM-G-HP1 Series

	Long service life cylinder
SCPD3	
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
Linear Slide Hand	
LSHM-A	
LSHM-G	
LSHM-F	
Low-profile long stroke hand	
LST	
LSTM	
Air Booster	
ABP2	
Compatible with rechargeable batteries	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
Supports food mfg. processes	
SCPD3	
CMK2	
SCM	
SSD2	
STG	

How to order switch

[Switch mounting: Rail]

- Switch body + mounting rail set

SCM - T0H* - D - 40 - 100

Switch model No.
(Page 57 Item F)
Bore size
(Page 57 Item B)
Switch quantity
(Page 57 Item G) (Page 57 Item G)
Stroke (*1)

- Mounting rail only

SCM - T - 40 - 100

Mounting rail
Bore size
(Page 57 Item B)
Stroke (*1)
(Page 57 Item E) (*2)

*1: Indicate X if the Stroke exceeds 300 mm. If exceeding 300 mm, a short rail (with 100mm switch adjustment travel distance) will be included per switch.

*2: If indicating X when ordering mounting rails only, order the same number of rails as that of applicable switches.

How to order mounting brackets

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket								
Foot (LB)	SCM-LB-20-HP1	SCM-LB-25-HP1	SCM-LB-32-HP1	SCM-LB-40-HP1	SCM-LB-50-HP1	SCM-LB-63-HP1	SCM-LB-80-HP1	SCM-LB-100-HP1
Flange (FA/FB)	SCM-FA-20-HP1	SCM-FA-25-HP1	SCM-FA-32-HP1	SCM-FA-40-HP1	SCM-FA-50-HP1	SCM-FA-63-HP1	SCM-FA-80-HP1	SCM-FA-100-HP1
Eye bracket (CA)	SCM-CA-20	SCM-CA-25	SCM-CA-32	SCM-CA-40	SCM-CA-50	SCM-CA-63	-	-
Clevis bracket (CB)	-	-	-	-	-	-	SCM-CB-80	SCM-CB-100
Trunnion (TA/TB)	SCM-TA-20	SCM-TA-25	SCM-TA-32	SCM-TA-40	SCM-TA-50	SCM-TA-63	-	-

*1: All mounting brackets are supplied with mounting bolts.

*2: The foot mounting bracket is provided as 2 pcs./set.

Material of mounting bracket

Mounting	Material
LB	Steel
FA/FB	Aluminum
TA/TB	Steel
CA	Steel
CB	Cast iron

Note: Mounting bracket will be shipped with the product. (Other than LB, FA)

Consumable parts list

- With air cushion

Bore size (mm)	Kit No.	Part name
ø 20	SCM-G-20BK-HP1	Rod packing
ø25	SCM-G-25BK-HP1	Cylinder gasket
ø32	SCM-G-32BK-HP1	Cushion rubber
ø40	SCM-G-40BK-HP1	Piston packing
ø50	SCM-G-50BK-HP1	Wear ring
ø63	SCM-G-63BK-HP1	Needle gasket
ø80	SCM-G-80BK-HP1	Holder gasket
ø100	SCM-G-100BK-HP1	Cushion packing

*1: Specify the kit No. when placing an order.

*2: Cushion rubber is not included in ø50 to ø100.

[Switch mounting: Band]

- Switch body + mounting bracket set + band

SCM - T2H* - 40 - Z

Switch model No.
(Page 57 Item F)
Bore size
(Page 57 Item B)

- Mounting bracket set + band

SCM - Z - 40

Bore size
(Page 57 Item B)

[Switch body only]

SW - T0H*

Switch model No.
(Page 57 Item F)

- With rubber cushion


Bore size (mm)	Kit No.	Part name
ø 20	SCM-G-20DK-HP1	Rod packing
ø25	SCM-G-25DK-HP1	Cylinder gasket
ø32	SCM-G-32DK-HP1	Cushion rubber
ø40	SCM-G-40DK-HP1	Piston packing
ø50	SCM-G-50DK-HP1	Wear ring
ø63	SCM-G-63DK-HP1	Scrapper
ø80	SCM-G-80DK-HP1	Lube keeping structure
ø100	SCM-G-100DK-HP1	

*1: Specify the kit No. when placing an order.

Dimensions




- Basic (00) ø20 to ø100
[With rubber cushion]

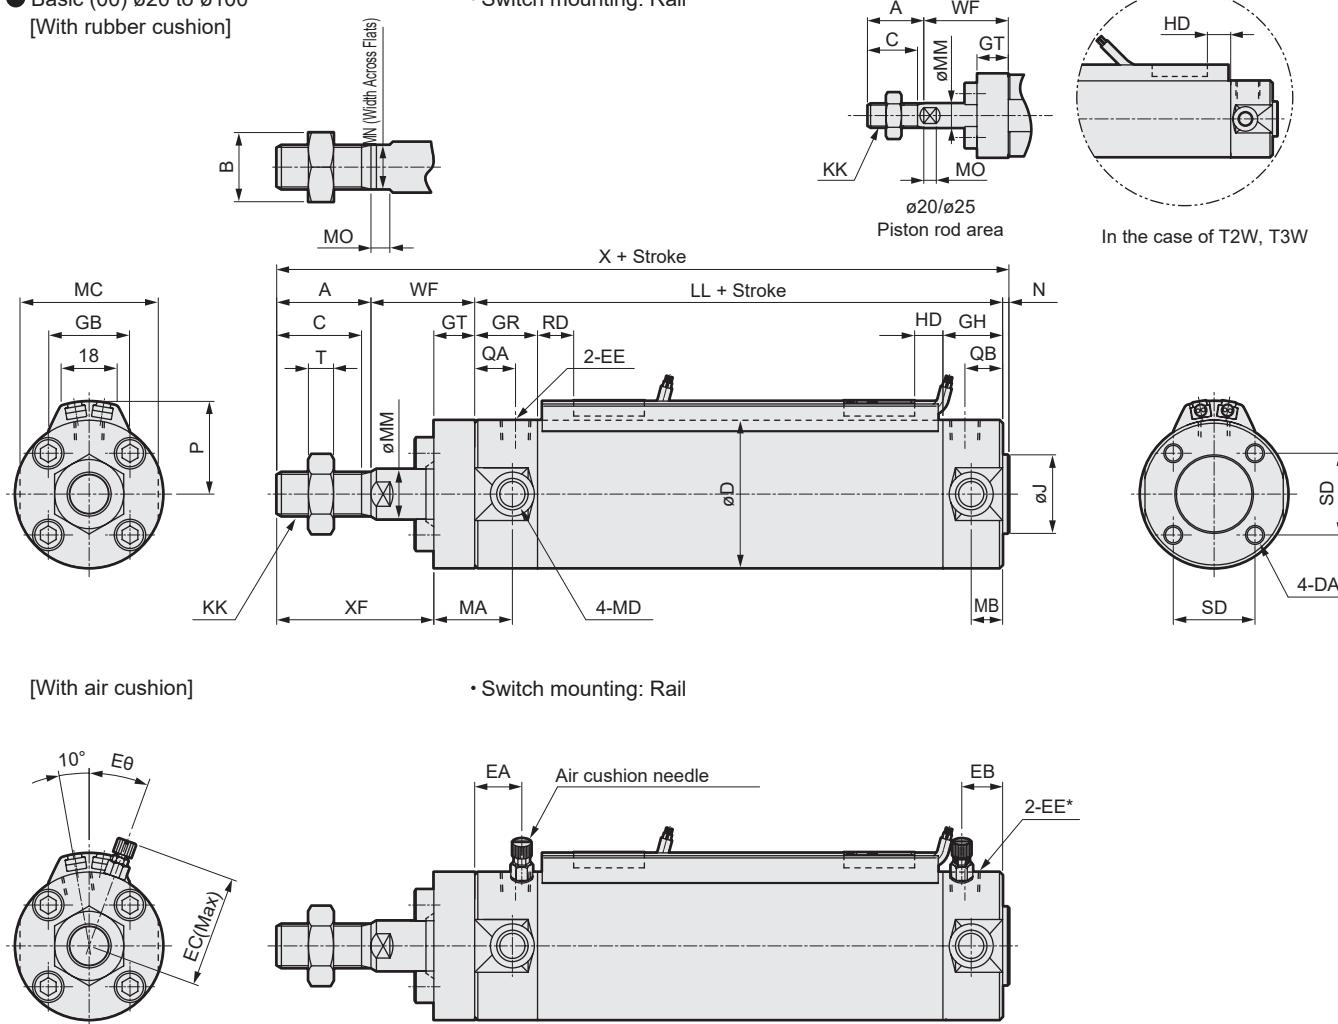

- [With air cushion]

• Switch mounting: Rail

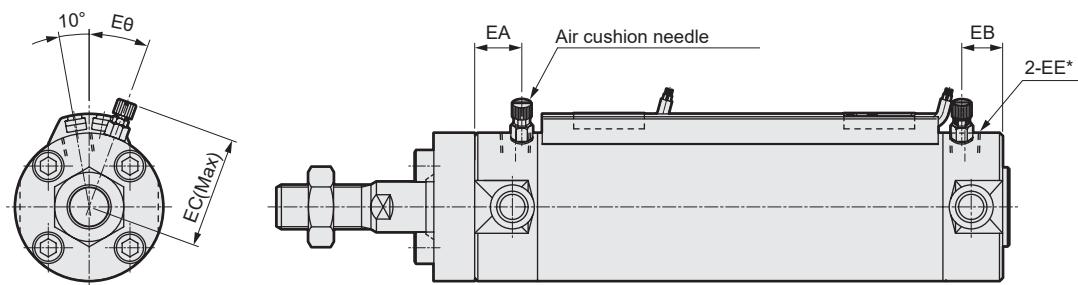

Code	Basic (00) basic dimensions																					
	Bore size (mm)	A	B	C	D	DA	EE ¹	GH	GR	GT	J	KK	LL	MA	MB	MC	MD	MM	MN	MO	N	QA
ø 20	18	13	16	26	M4 depth 6.5	Rc1/8	17	19	10	12	M8	69	21	11	24	M5	8	6	4	2	12	10
ø25	22	17	20	31	M5 depth 6.5	Rc1/8	17	19	10	14	M 10 x 1.25	69	21	11	29	M6	10	8	5	2	12	10
ø32	22	17	20	38	M5 depth 7.5	Rc1/8	17	19	11	18	M 10 x 1.25	71	22	10	36	M8	12	10	5.5	2	12	10
ø40	30	22	27	47	M6 depth 12	Rc1/8	19	20	13	25	M 14 x 1.5	78	25	10	44	M10	16	14	6	2	13	12
ø50	35	27	32	58	M8 depth 16	Rc1/4	22	25	14	30	M 18 x 1.5	90	27	12	55	M12	20	17	8	2	15	12
ø63	35	27	32	72	M10 depth 16	Rc1/4	22	25	14	32	M 18 x 1.5	90	27	12	69	M14	20	17	8	2	15	12
ø80	40	32	37	89	M10 depth 22	Rc3/8	28	28	15	40	M 22 x 1.5	108	-	-	80	-	25	22	11	3	15	15
ø100	40	41	37	110	M12 depth 22	Rc1/2	28	28	15	50	M 26 x 1.5	108	-	-	100	-	30	27	13	3	15	15

Code	With air cushion										Switch mounting: Rail									
	SD	T	WF	X	XF	EA	EB	EC	EE ¹	Eθ	P	GB	HD			RD				
Bore size (mm)													T0/T5	T2/T2R T3/T3P	T2W T3W	T0/T5	T2/T2R T3/T3P	T2W T3W		
ø 20	14	5	27	116	35	14	12	27	M5	30°	19.5	23	3.0	6.5	8.5	7.5	7.5	9.5		
ø25	16.5	6	28	121	40	14	12	29.5	M5	30°	22	24.4	2.0	5.5	7.5	8.5	8.5	10.5		
ø32	20	6	29	124	40	14	12	32.8	Rc1/8	25°	25.5	25	3.0	6.5	8.5	9.5	9.5	11.5		
ø40	26	8	33	143	50	15	12	36.6	Rc1/8	20°	30	25.7	5.0	8.5	10.5	11.5	11.5	13.5		
ø50	32	11	36	163	57	18.5	15.5	43	Rc1/4	20°	35.5	26.2	7.5	11.0	13.0	13.0	13.0	15.0		
ø63	38	11	36	163	57	18.5	15.5	50	Rc1/4	20°	42.5	26.5	7.5	11.0	13.0	13.0	13.0	15.0		
ø80	50	13	44	195	69	20	20	58.5	Rc3/8	20°	51	26.7	9.5	13.0	15.0	20.0	20.0	22.0		
ø100	60	16	47	198	72	20	20	69	Rc1/2	20°	61.5	26.7	10.0	13.5	15.5	19.5	19.5	21.5		

1: Piping port (EE) of ø20, ø25 is different. Refer to the dimensions (EE) of the type with air cushion.

*2: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for RD, HD and protruding dimensions of the 2-color display, off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

*3: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for the dimensions of accessories.

* Refer to double acting/single rod in "Pneumatic Cylinders I" (No. CB-029SA) for dimensions of each mounting type.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



SCM-G-HP1 Series

Dimensions





● Basic (00) ø20 to ø100
[With rubber cushion]

• Switch mounting: Band

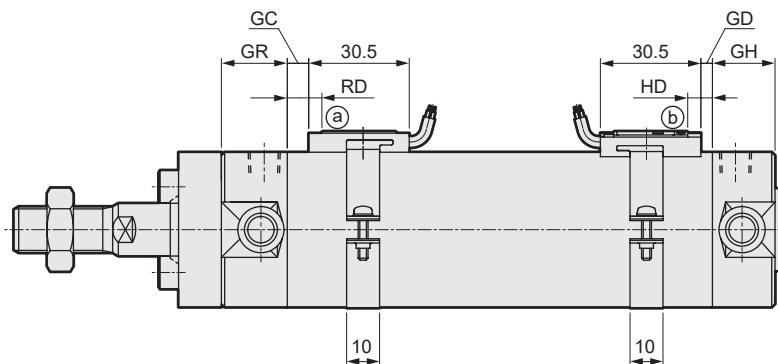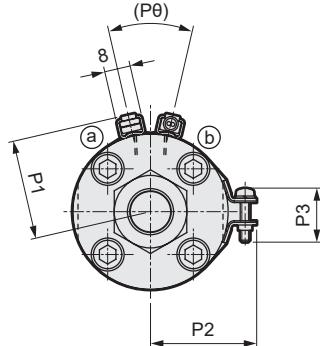

[With air cushion]

• Switch mounting: Band

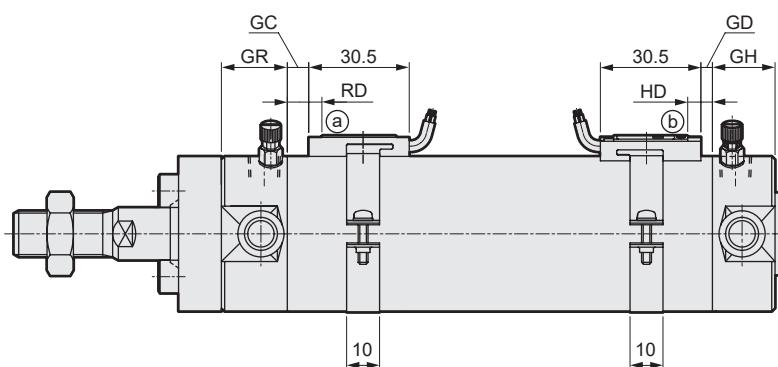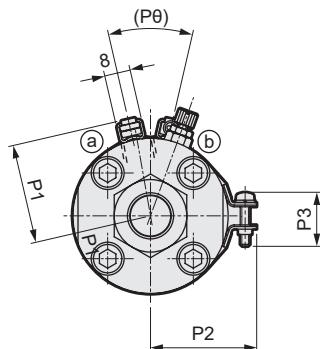

Code

Switch mounting: Band

Code	Bore size (mm)	GD		GC			GH	GR	HD			RD			P1	P2	P3	Pθ	
		T0/T5	T2,T3	T2W T3W	T0/T5	T2,T3	T2W T3W		T0/T5	T2,T3	T2W T3W	T0/T5	T2,T3	T2W T3W					
SCPD3	ø 20	2.5	2.5	4.5	3.5	3.5	5.5	17	19	6.5	6.5	8.5	7.5	7.5	9.5	19.6	21.5	14	(38)
CMK2	ø 25	1.5	1.5	3.5	4.5	4.5	6.5	17	19	5.5	5.5	7.5	8.5	8.5	10.5	22.1	23.9	14	(34)
SCM	ø 32	2.5	2.5	4.5	5.5	5.5	7.5	17	19	6.5	6.5	8.5	9.5	9.5	11.5	25.6	27.6	16	(30)
SSD2	ø 40	4.5	4.5	6.5	7.5	7.5	9.5	19	20	8.5	8.5	10.5	11.5	11.5	13.5	30.2	32.1	16	(26)
MSD	ø 50	7.0	7.0	9.0	9.0	9.0	11.0	22	25	11.0	11.0	13.0	13.0	13.0	15.0	35.7	37.4	16	(22)
MSDG-L	ø 63	7.0	7.0	9.0	9.0	9.0	11.0	22	25	11.0	11.0	13.0	13.0	13.0	15.0	42.7	44.4	16	(20)
SMG	ø 80	9.0	9.0	11.0	16.0	16.0	18.0	28	28	13.0	13.0	15.0	20.0	20.0	22.0	51.2	53.0	16	(16)
STG	ø 100	9.5	9.5	11.5	15.5	15.5	17.5	28	28	13.5	13.5	15.5	19.5	19.5	21.5	61.7	63.5	16	(16)
STR2																			
LCR																			
LCG																			
LSH-A																			
LSH-G																			
LSH-F																			
LSHL-A																			
LSHL-G																			
LSHL-F																			
LSTM																			
Air Booster																			
ABP2																			

*1: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for RD, HD and protruding dimensions of the 2-color display, off-delay, AC magnetic field proof, T1H/V and T8H/V switches.



*2: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for the dimensions of accessories.

Compatible with rechargeable batteries	SCPD3
	CMK2
	SCM
	SCG
	SSD2
	STG
Supports food mtg. processes	SCPD3
	CMK2
	SCM
	SCG
	SSD2
	STG



Dimensions



● Axial foot (LB)

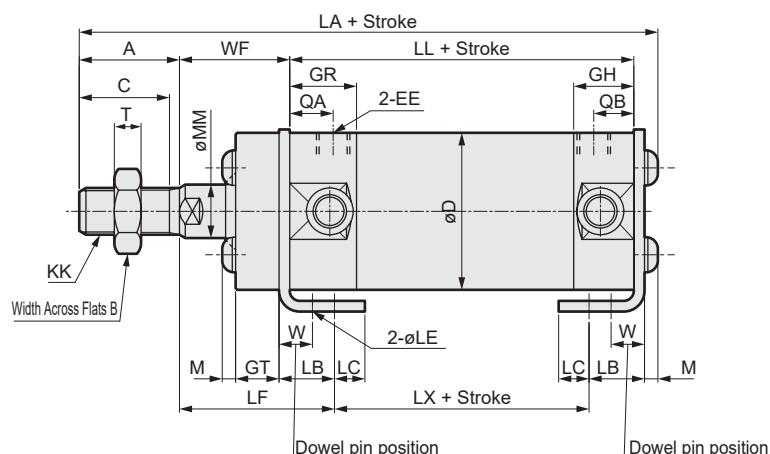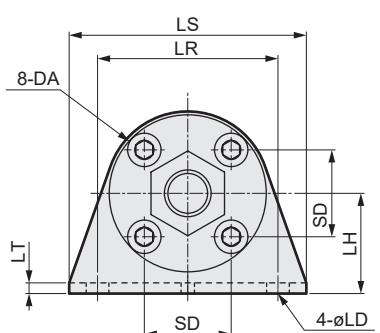

● Rod side flange (FA)

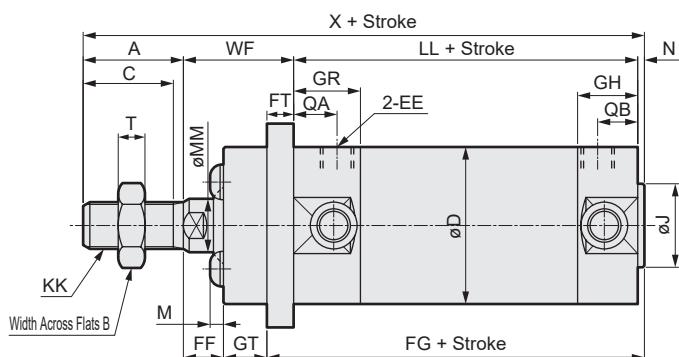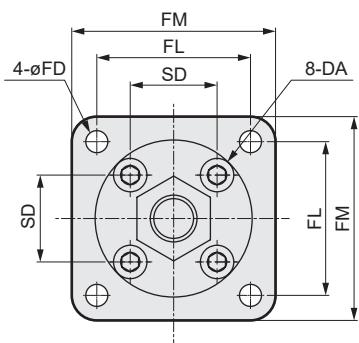

Code	Axial foot (LB) basic dimensions																							
	A	B	C	D	DA	EE (*1)	GH	GR	GT	KK	LA	LB	LC	LD	LE	LF	LH	LL	LR	LS	LT	LX	M	MM
Ø 20	18	13	16	26	M4	Rc1/8	17	19	10	M8	119.8	15.1	7.1	5.7	4	38.9	20	69	32	44	3.2	45.2	2.6	8
Ø 25	22	17	20	31	M5	Rc1/8	17	19	10	M 10 x 1.25	125.6	15.1	7.1	5.7	4	39.9	22	69	36	49	3.2	45.2	3.4	10
Ø 32	22	17	20	38	M5	Rc1/8	17	19	11	M 10 x 1.25	128.6	16.1	8.1	6.8	4	41.9	25	71	44	58	3.2	45.2	3.4	12
Ø 40	30	22	27	47	M6	Rc1/8	19	20	13	M 14 x 1.5	148.2	16.6	9.1	6.8	4	46.4	30	78	54	71	3.2	51.2	4	16
Ø 50	35	27	32	58	M8	Rc1/4	22	25	14	M 18 x 1.5	170.5	22	11	9	5	53.5	40	90	66	86	4.5	55	5	20
Ø 63	35	27	32	72	M10	Rc1/4	22	25	14	M 18 x 1.5	170.5	22	13	11	5	53.5	45	90	82	106	4.5	55	5	20
Ø 80	40	32	37	89	M10	Rc3/8	28	28	15	M 22 x 1.5	202.5	28.5	14	11	6	68	55	108	100	125	4.5	60	6	25
Ø 100	40	41	37	110	M12	Rc1/2	28	28	15	M 26 x 1.5	208	30	16	14	6	71	65	108	120	150	6	60	7	30

Code	Rod side flange (FA) basic dimensions						
	QA	QB	SD	T	W	WF	
Ø 20	12	10	14	5	10	27	
Ø 25	12	10	16.5	6	10	28	
Ø 32	12	10	20	6	10	29	
Ø 40	13	12	26	8	10	33	
Ø 50	15	12	32	11	17.5	36	
Ø 63	15	12	38	11	17.5	36	
Ø 80	15	15	50	13	20	44	
Ø 100	15	15	60	16	20	47	

Code	Rod side flange (FA) basic dimensions																									
	A	B	C	D	DA	EE (*1)	FD	FF	FG	FL	FM	FT	GH	GR	GT	J	KK	LL	MM	N	QA	QB	SD	T	WF	X
Ø 20	18	13	16	26	M4	Rc1/8	5.5	11	77	28	40	6	17	19	10	12	M8	69	8	2	12	10	14	5	27	116
Ø 25	22	17	20	31	M5	Rc1/8	5.5	11	78	32	44	7	17	19	10	14	M 10 x 1.25	69	10	2	12	10	16.5	6	28	121
Ø 32	22	17	20	38	M5	Rc1/8	6.6	11	80	38	53	7	17	19	11	18	M 10 x 1.25	71	12	2	12	10	20	6	29	124
Ø 40	30	22	27	47	M6	Rc1/8	6.6	12	88	46	61	8	19	20	13	25	M 14 x 1.5	78	16	2	13	12	26	8	33	143
Ø 50	35	27	32	58	M8	Rc1/4	9	13	101	58	76	9	22	25	14	30	M 18 x 1.5	90	20	2	15	12	32	11	36	163
Ø 63	35	27	32	72	M10	Rc1/4	11	13	101	70	92	9	22	25	14	32	M 18 x 1.5	90	20	2	15	12	38	11	36	163
Ø 80	40	32	37	89	M10	Rc3/8	11	18	122	82	104	11	28	28	15	40	M 22 x 1.5	108	25	3	15	15	50	13	44	195
Ø 100	40	41	37	110	M12	Rc1/2	13	18	125	100	128	14	28	28	15	50	M 26 x 1.5	108	30	3	15	15	60	16	47	198

*1:Needle relational dimensions and port sizes of the type with air cushion are the same as those of the basic type. Refer to pages 59 and 60. (Those of Ø20/Ø25 are different from the basic type.)

*2:Refer to "Pneumatic Cylinders I (No. CB-029SA)" for RD, HD and protruding dimensions of the 2-color display, off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

*3:Refer to "Pneumatic Cylinders I (No. CB-029SA)" for the dimensions of accessories.

SCPD3	CMK2	SCM	SSD2	MDC2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2	SCPD3	CMK2	SCM	SCG	SSD2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2		
LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	SCPD3	CMK2	SCM	SSD2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2	
LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	SCPD3	CMK2	SCM	SCG	SSD2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2
LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	SCPD3	CMK2	SCM	SCG	SSD2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2
LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LSH-A	LSH-G	LSH-F	LSHL-A	LSHL-G	LSHL-F	SCPD3	CMK2	SCM	SCG	SSD2	MSD	MSDG-L	SMG	LCR	LCG	STM	STG	STR2



Tie rod cylinder Double acting/rubber scraper

Environment-resistant cylinder

SCG-G-HP1 Series

● Bore size: ø32/ø40/ø50/ø63/ø80/ø100

JISCode



Specifications

Item	SCG-G-HP1					
LCG	Bore size mm	ø32	ø40	ø50	ø63	ø80
STM	Actuation			Double acting		
STG	Working fluid			Compressed air		
STR2	Max. working pressure MPa			1.0		
SCPD3	Min. working pressure MPa			0.15		
CMK2	Proof pressure MPa			1.6		
SCM	Ambient temperature °C			-10 to 60 (no freezing)		
SSD2	Port size	Rc1/8	Rc1/4	Rc3/8	Rc1/2	
SMG	Stroke tolerance mm	$^{+1.4}_0$ (up to 1000), $^{+1.8}_0$ (1001 to 1500)				
LCR	With air cushion	$^{+1.0}_0$ (up to 360), $^{+1.4}_0$ (361 to 1000), $^{+1.8}_0$ (1001 to 1500)				
STG	Working piston speed mm/s	50 to 1000 (Use the product within the allowable absorbed energy.)				
STS	Cushion	Either air cushion or rubber cushion can be selected				
STL	Effective air cushion length mm	8.6	8.6	13.4	13.4	15.4
LSH-A	Lubrication	Not required				
LSH-G	Allowable absorbed energy	With rubber cushion	0.5	0.9	1.6	1.6
LSH-F	With air cushion	J	2.5	3.7	8.0	14.4
LSHL-A						25.4
LSHL-G						45.6
LSHL-F						

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Available stroke (mm)	Min. Stroke(mm)
ø32	25/50/75/100 150/200/250 300/350/400 450/500	600	700	1
ø40			800	
ø50			1200	
ø63			1200	
ø80			700	
ø100			1400	
			800	
			1500	

*1: The custom Stroke is available in 1 mm increments.

*2: If the max. stroke length is exceeded, product specifications may not be met, depending on operating conditions. Contact CKD in this case.

Min. stroke with T0/T5 switches

Switch quantity	Different surface mounting				Same surface mounting				Center trunnion mounting				Rod side trunnion mounting Position cannot be detected at the rod side stroke end.	Head side trunnion mounting Position cannot be detected at the head side stroke end.		
	1	2	3	4	1	2	3	4	1	2	3	4				
MSDG-L	Bore size (mm)	ø32	9	17	34	51	9	48 (33)	78 (64)	109 (94)	94 (94)	94 (94)	189 (155)	169 (155)	42	42
SMG	ø40	9	18	36	54	9	48 (33)	78 (64)	109 (94)	81 (81)	81 (81)	164 (142)	164 (142)	38	38	
STG	ø50	9	18	36	54	9	18	36	54	112 (112)	112 (112)	121 (121)	121 (121)	51	53	
STM	ø63	10	19	38	57	10	19	38	57	85 (73)	85 (73)	91 (91)	91 (91)	41	42	
LCR	ø80	10	20	39	59	10	20	39	59	96 (79)	96 (79)	99 (99)	99 (99)	41	47	
LCG	ø100	10	20	40	60	10	20	40	60	101 (84)	101 (84)	105 (105)	105 (105)	47	53	

*1: Values in () are for T*V (radial lead wire).

*2: When the Stroke is 15 mm or less, the two switches could turn ON at the same time. In this case, adjust switch mounting positions to be as far apart as possible.

Min. stroke with T8 switch

Switch quantity	Different surface mounting				Same surface mounting				Center trunnion mounting				Rod side trunnion mounting Position cannot be detected at the rod side stroke end.	Head side trunnion mounting Position cannot be detected at the head side stroke end.		
	1	2	3	4	1	2	3	4	1	2	3	4				
LSHL-G	Bore size (mm)	ø32	9	17	34	51	9	54 (31)	84 (62)	115 (92)	100 (100)	100 (100)	191 (161)	191 (161)	45	45
LSHL-F	ø40	9	18	36	54	9	54 (31)	84 (62)	115 (92)	87 (87)	87 (87)	178 (148)	178 (148)	41	41	
SCPD3	ø50	9	18	36	54	9	18	36	54	116 (116)	116 (116)	121 (121)	121 (121)	54	55	
CMK2	ø63	10	19	38	57	10	19	38	57	89 (77)	89 (77)	99 (99)	99 (99)	44	44	
SCM	ø80	10	20	39	59	10	20	39	59	100 (75)	100 (75)	111 (111)	111 (111)	43	49	
SCG	ø100	10	20	40	60	10	20	40	60	105 (80)	105 (80)	117 (117)	117 (117)	49	55	
SSD2																

*1: Values in () are for T*V (radial lead wire).

*2: When the Stroke is 15 mm or less, the two switches could turn ON at the same time. In this case, adjust switch mounting positions to be as far apart as possible.

Min. stroke with T2/T3 switches

Switch quantity	Different surface mounting				Same surface mounting				Center trunnion mounting				Rod side trunnion mounting Position cannot be detected at the rod side stroke end.	Head side trunnion mounting Position cannot be detected at the head side stroke end.	
	1	2	3	4	1	2	3	4	1	2	3	4	1	1	
Bore size (mm)															
ø32	5	10	20	30	5	40(33)	70(64)	101(94)	64(55)	64(55)	131(116)	131(116)	27	27	
ø40	5	10	20	30	5	40(33)	70(64)	101(94)	69(60)	69(60)	152(121)	152(121)	32	32	
ø50	5	10	20	30	5	10	20	30	71(62)	71(62)	71(61)	71(61)	31	32	
ø63	6	11	21	32	6	11	21	32	77(68)	77(68)	77(68)	77(68)	37	38	
ø80	6	11	22	33	6	11	22	33	88(79)	88(79)	88(80)	88(80)	37	43	
ø100	6	11	22	33	6	11	22	33	93(84)	93(84)	93(85)	93(85)	43	49	

*1: Values in () are for T*V (radial lead wire).

*2: When the Stroke is 15 mm or less, the two switches could turn ON at the same time. In this case, adjust switch mounting positions to be as far apart as possible.

Min. stroke with T1/T2Y/T3Y/T2YD/T2W/T3W switches

Switch quantity	Different surface mounting				Same surface mounting				Center trunnion mounting				Rod side trunnion mounting Position cannot be detected at the rod side stroke end.	Head side trunnion mounting Position cannot be detected at the head side stroke end.	
	1	2	3	4	1	2	3	4	1	2	3	4	1	1	
Bore size (mm)															
ø32	6	11	22	33	6	62(49)	92(80)	123(110)	86(61)	86(61)	177(122)	177(122)	38	38	
ø40	6	11	22	33	6	62(49)	92(80)	123(110)	91(66)	91(66)	182(127)	182(127)	43	43	
ø50	6	12	24	36	6	12	24	36	93(68)	93(68)	93(68)	93(68)	42	43	
ø63	6	12	24	36	6	12	24	36	99(74)	99(74)	99(74)	99(74)	48	49	
ø80	7	13	25	38	7	13	25	38	110(85)	110(85)	110(86)	110(86)	48	54	
ø100	7	13	26	39	7	13	26	39	115(90)	115(90)	115(92)	115(92)	54	60	

*1: Values in () are for T*V (radial lead wire).

*2: When the Stroke is 15 mm or less, the two switches could turn ON at the same time. In this case, adjust switch mounting positions to be as far apart as possible.

How to order mounting brackets

Bore size (mm)	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket						
Foot (LB)	SCG-LB-32	SCG-LB-40	SCG-LB-50	SCG-LB-63	SCG-LB-80	SCG-LB-100
Flange (FA) (FB)	SCG-FA-32	SCG-FA-40	SCG-FA-50	SCG-FA-63	SCG-FA-80	SCG-FA-100
Eye bracket (CA)	SCG-CA-32	SCG-CA-40	SCG-CA-50	SCG-CA-63	SCG-CA-80	SCG-CA-100
Clevis bracket (CB)	SCG-CB-32	SCG-CB-40	SCG-CB-50	SCG-CB-63	SCG-CB-80	SCG-CB-100

*1: The foot mounting bracket (LB) is provided as 2 pcs./set.

*2: All mounting brackets have mounting bolts attached.

Material of mounting bracket

Mounting	Material	Remarks
LB	Steel	Nickel plating
FA/FB	Steel	Painted
CA/CB	Cast iron	Painted
TA/TB/TC	Cast iron	Painted

Note: Mounting bracket will be shipped with the product.

Trunnion types (TA, TB, TC) are assembled at shipment.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

SCG-G-HP1 Series

How to order

Without switch (built-in magnet for switch)

SCG-G - LB - 40 - B - 100 - M - I - HP1

With switch (built-in magnet for switch)

SCG-G - LB - 40 - B - 100 - T2H - R - M - I - HP1

Model No.

A Mounting
*1

B Bore size

C Port thread

D Cushion

E Stroke

F Switch model No.

G Switch quantity
*3

H Option

I Accessory
*4

How to order switch

- Switch body + mounting bracket set

SCG - TOH - 40

Switch model No.
(Item **F**) Bore size
(Item **B**)

- Switch body only

SW - TOH

Switch model No.
(Item **F**)

- Switch mounting bracket set

SCG - T - 40

Mounting bracket Bore size
(Item **B**)

Code	Description
A Mounting	
00	Basic
LB	Axial foot
FA	Rod side flange
FB	Head side flange
CA	Eye bracket
CB	Clevis bracket (pin and split pin attached)
TA	Rod side trunnion
TB	Head side trunnion
TC	Intermediate trunnion

Code	Description
B Bore size (mm)	
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

Code	Description
C Port thread	
Blank	Rc thread
N	NPT thread (made to order)
G	G thread (made-to-order product)

Code	Description
D Cushion	
B	Two-sided air cushion (basic)
D	Two-sided rubber cushion

Note: The rubber cushioned type has a longer total length than the air cushioned type...

Bore size	Stroke *2	Available Stroke	Custom Stroke
ø32	1 to 600	700	In 1 mm increments
ø40		800	
ø50		1200	
ø63			
ø80		1400	
ø100		1500	

F		Switch model No.	Lead wire	Display	Lead wire
Lead wire	Contact	Voltage	AC	DC	
TOH*	TOV*	TOH*	●	●	1-color display
T5H*	T5V*	T5H*	●	●	No indicator lamp
T8H*	T8V*	T8H*	●	●	1-color display
T1H*	T1V*	T1H*	●		1-color display
T2H*	T2V*	T2H*	●		2-wire
T3H*	T3V*	T3H*	●		3-wire
T2HR3	T2VR3	T2HR3	●		1-color display
T3PH*	T3PV*	T3PH*	●		Bending resistant lead wire
T2WH*	T2WV*	T2WH*	●		1-color display (made to order)
T2YH*	T2YV*	T2YH*	●		2-wire
T3WH*	T3WV*	T3WH*	●		3-wire
T3YH*	T3YV*	T3YH*	●		2-color display
T2YD*	-	T2YD*	●		2-color display
T2YDT*	-	T2YDT*	●		AC magnetic field
T2JH*	T2JV*	T2JH*	●		1-color display off-delay

* Lead wire length	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

G		Switch quantity
R	1	on rod side
H	1	on head side
D	2	
T	3	

H		Option
M	Piston rod material (stainless steel)	
P6	Copper and PTFE free	


I		Accessory
I	Rod eye	
Y	Rod clevis (pin and split pin attached)	
B1	Eye bracket	
B2	Clevis bracket (pin and split pin attached)	
B3	Eye bracket	
B4	Trunnion No. 2 bracket (2 pcs./set)	

SCP3	CMK2	SCM	SSD2	MSD2	MSDG-L	SMG	LCR	LCG	STM	STR2	SCPD3	CMK2	SCM	SCG	SSD2	SMG	LCR	STG	STS	STL	
LSH-A	LSH-G	LSH-F	LSHL-A	LSHG-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCP3	CMK2	SCM	SSD2	MSD2	MSDG-L	SMG	LCR	LCG	STM
LSH-A	LSH-G	LSH-F	LSHL-A	LSHG-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCP3	CMK2	SCM	SSD2	MSD2	MSDG-L	SMG	LCR	LCG	STM
LSH-A	LSH-G	LSH-F	LSHL-A	LSHG-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCP3	CMK2	SCM	SSD2	MSD2	MSDG-L	SMG	LCR	LCG	STM
LSH-A	LSH-G	LSH-F	LSHL-A	LSHG-G	LSHL-F	LSHM-A	LSHM-G	LSHM-F	LST	LSTM	ABP2	SCP3	CMK2	SCM	SSD2	MSD2	MSDG-L	SMG	LCR	LCG	STM

Dimensions



● Basic(00)

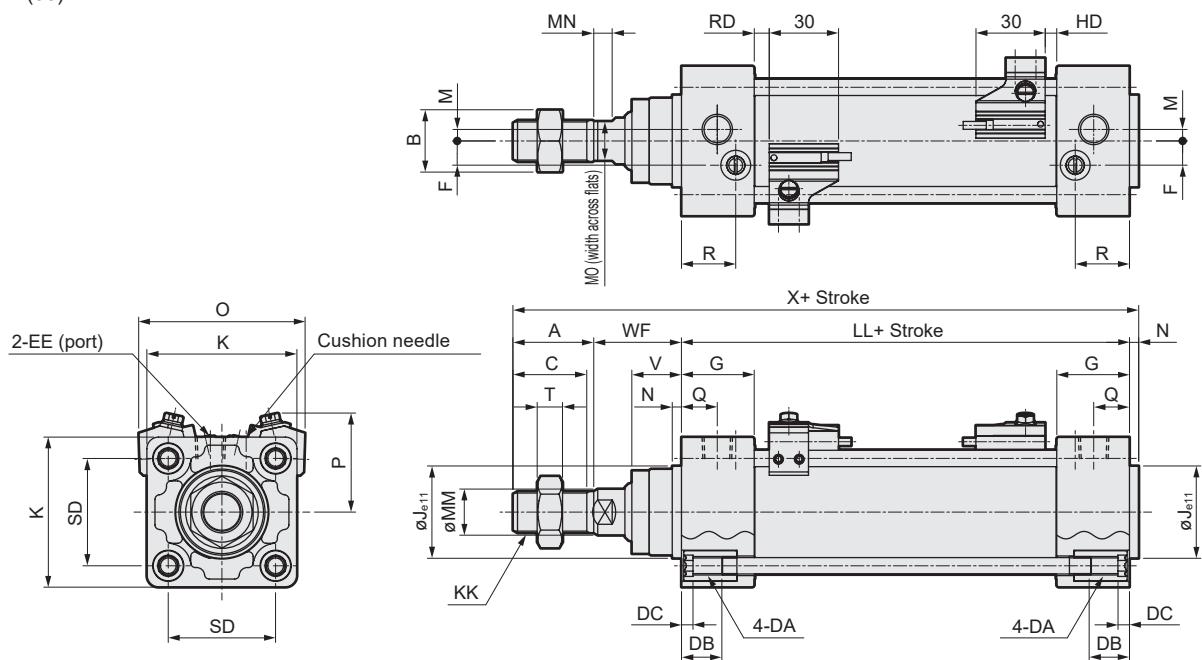

Code	Basic (00) basic dimensions																	
	A	B	C	DA	DB	DC	EE	F	G	J	K	KK	*1 LL	M	MM	MN	MO	
ø32	22	17	19.5	M6	16	5	Rc1/8	6.5	27	30	46	M10X1.25	84(90)	4	12	5.5	10	
ø40	30	22	27	M6	16	5	Rc1/4	9	27	35	52	M14X1.5	84(90)	4	16	6	14	
ø50	35	27	32	M8	16	5	Rc1/4	10.5	31.5	40	65	M18X1.5	94(102)	5	20	8	17	
ø63	35	27	32	M8	16	5	Rc3/8	12	31.5	45	75	M18X1.5	94(102)	9	20	8	17	
ø80	40	32	37	M10	16	5	Rc3/8	14	38	45	95	M22X1.5	114(124)	11.5	25	11	22	
ø100	40	41	37	M10	16	5	Rc1/2	15	38	55	114	M26X1.5	114(124)	17	30	13	27	
Code	Mounting dimensions								With switch									
	N	Q	R	SD	T	V	WF	*1 X	O	P	T0,T5,T2,T3		T2W,T3W		RD	HD	RD	HD
ø32	4	13	19	32.5	6	19.5	30	140(146)	59	38	5(8)	5(8)	7.5 (10.5)	7.5 (10.5)				
ø40	4	14	19	38	8	19	31	149(155)	66	41	5(8)	5(8)	7.5 (10.5)	7.5 (10.5)				
ø50	4	15.5	23.5	46.5	11	21.5	38	171(179)	72	43	6.5 (10.5)	5(9)	9(13)	7(11)				
ø63	4	16.5	21.5	56.5	11	21.5	38	171(179)	83	48	6.5 (10.5)	5(9)	9(13)	7(11)				
ø80	4	19	28	72	13	27.5	47	205(215)	104	57	12.5 (17.5)	6(11)	15(20)	8(13)				
ø100	4	19	28	89	16	27.5	47	205(215)	121	63	12(17)	6.5 (11.5)	14.5 (19.5)	8.5 (13.5)				

*1: Dimensions in () are for the rubber cushion.

*2: For HD, RD and protruding dimensions of other switches, "Pneumatic Cylinders I (No. CB-029SA)".

*3: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for the dimensions of accessories.

* Refer to double acting/single rod in "Pneumatic Cylinders I" (No. CB-029SA) for dimensions of each mounting type.

Consumable parts list

● With air cushion

Bore size (mm)	Kit No.	Part name
ø32	SCG-G-32BK-HP1	Rod packing
ø40	SCG-G-40BK-HP1	Cylinder gasket
ø50	SCG-G-50BK-HP1	Cushion packing
ø63	SCG-G-63BK-HP1	Piston packing
ø80	SCG-G-80BK-HP1	Wear ring
ø100	SCG-G-100BK-HP1	Needle gasket
		Scraper
		Lube keeping structure

Note: Specify the kit No. when placing an order.

● With rubber cushion

Bore size (mm)	Kit No.	Part name
ø32	SCG-G-32DK-HP1	Rod packing
ø40	SCG-G-40DK-HP1	Cylinder gasket
ø50	SCG-G-50DK-HP1	Piston packing
ø63	SCG-G-63DK-HP1	Wear ring
ø80	SCG-G-80DK-HP1	Needle gasket
ø100	SCG-G-100DK-HP1	Cushion rubber
		Scraper
		Lube keeping structure

Note: Specify the kit No. when placing an order.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Compact cylinder
Double acting/single rod/rubber scraper

Environment-resistant cylinder

SSD2-G-HP1 Series

● Bore size: ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100

JIS symbol



Specifications

	SSD2-G-HP1 SSD2-GL-HP1 (with switch)									
Descriptions	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
STM										
STG										
STR2										
Working fluid										
SCPD3										
CMK2										
SCM										
SSD2										
MDC2										
MSD										
MSDG-L										
SMG										
LCR										
LCG										
STL										
STS										
STG										
Port size										
SCG										
SSD2										
Ambient temperature °C										
SMG										
LCR										
LSH-A										
LSH-G										
LSH-F										
LSHL-A										
LSHL-G										
LSHL-F										
LSHM-A										
LSHM-G										
LSHM-F										
LST										
LSTM										
ABP2										
SCPD3										
CMK2										
SCM										
SSD2										

*1: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
ø12	5/10/15/20		
ø16	25/30	30	
ø20	5/10/15/20/25		
ø25	30/35/40/45/50	50	
ø32	5/10/15/20/25/30/		
ø40	35/40/45/50/75/100		
ø50			
ø63	10/15/20/25		
ø80	30/35/40/45/50		
ø100	75/100	100	

*1: When using the type with switch, refer to the table of the min. Stroke with switch.

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LST

LSTM

ABP2

SCPD3

CMK2

SCM

SSG

SSD2

STG

Custom Stroke

SSD2 Series


Descriptions	Standard Stroke body with spacer	
Model No.	Refer to How to order.	
Product Descriptions	A spacer is added to the standard Stroke body to adjust the Stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12, 16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-G-32-38-HP1 Add a +2 mm spacer to standard cylinder SSD2-G-32-40-HP1 to make it 38 mm.B + Stroke is 73 mm.	

Min. Stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
ø12		
ø16	10 (5)	10 (5)
ø20		
ø25		
ø32		
ø40		
ø50	5	5
ø63		
ø80		
ø100		

1: Less than 10mm with 2-color display, off-delay, AC magnetic field proof, T1, T8* switches is not available.

*2: Values in () are for the type with 1 on rod side.

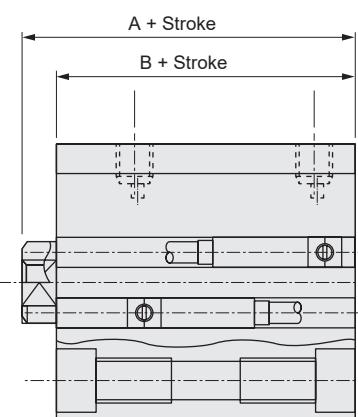

How to order

Without switch (without magnet for switch)

SSD2-G - 32 - 5 - N - LB - I - HP1

With switch (built-in magnet for switch)

SSD2-GL - 32 - 10 - T0H - R - N - LB - I - HP1

A Model No.

B Bore size

C Port thread

D Stroke

E Switch model No.

*1
*2
*3
*6
*7

F Switch quantity

G Option

H Mounting bracket

*4
*9

⚠ Precautions for model No. selection

- *1: The T2YD* switch cannot be mounted on the Ø12 and Ø16 bore sizes.
- *2: T8* switch cannot be installed on Ø12 to Ø32.
- *3: The F type switch can only be mounted on the piping port surface of bore sizes Ø20 and Ø25.
- *4: The mounting bracket is attached at shipment.
- *5: "I" and "Y" cannot be selected together.
- *6: The F type switch with L type lead wire on Ø20 models cannot be selected on Strokes 15 mm or under.
- *7: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- *8: F type switch cannot be selected.
- *9: The Ø12 to Ø32 structure does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Assembly before shipment is available as made to order.

[Example of model No.]

SSD2-GL-20-10-T0H-R-N-LB-I-HP1

Model: Compact cylinder double acting

B Bore size : Ø20 mm

C Port thread : M5

D Stroke : 10 mm

E Switch model No. : Reed switch T0H*
Lead wire length 1 m

F Switch quantity : 1 on rod side

G Option : Rod end male thread

H Mounting bracket : Axial foot

I Accessory : Rod eye

Code	Description
A Model No.	
SSD2-G	Double acting/single rod/rubber scraper
SSD2-GL	Double acting/single rod/rubber scraper/with switch

B Bore size (mm)

12	Ø12
16	Ø16
20	Ø20
25	Ø25
32	Ø32
40	Ø40
50	Ø50
63	Ø63
80	Ø80
100	Ø100

C Port thread

Blank	M5 (Ø12 to Ø25) Rc thread (Ø32 to Ø100)
NN	NPT thread (Ø32 and over) (made to order)
GN	G thread (Ø32 and over) (made-to-order product)

D Stroke (mm)

Refer to the Stroke table on the following page.

E Switch model No.

Lead wire Straight	Lead wire L-shaped	Contact	Voltage AC / DC	Display	Lead wire	Bore size									
						12	16	20	25	32	40	50	63	80	100
F2S*				●	2-wire			●	●						
F3S*				●	3-wire			●	●	●					
F2H*	F2V*			●	2-wire			●	●	●					
F3H*	F3V*			●	3-wire			●	●	●					
F3PH*	F3PV*			●	1-color display / PNP output (made to order)	3-wire		●	●	●					
F2YH*	F2YV*			●	2-wire			●	●	●					
F3YH*	F3YV*			●	3-wire			●	●	●					
T0H*	T0V*			●	1-color display	2-wire	●	●	●	●	●	●	●	●	●
T5H*	T5V*			●	No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●
T8H*	T8V*			●	1-color display	2-wire									
T1H*	T1V*			●	1-color display	2-wire									
T2H*	T2V*			●	1-color display	3-wire	●	●	●	●	●	●	●	●	●
T3H*	T3V*			●	1-color display	3-wire	●	●	●	●	●	●	●	●	●
T2HR3	T2VR3			●	Bending resistant lead wire	2-wire	●	●	●	●	●	●	●	●	●
T3PH*	T3PV*			●	1-color display / PNP output (made to order)	3-wire	●	●	●	●	●	●	●	●	●
T2WH*	T2WV*			●	2-wire	2-wire	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*			●	2-color display	3-wire	●	●	●	●	●	●	●	●	●
T3WH*	T3WV*			●	2-color display	3-wire	●	●	●	●	●	●	●	●	●
T3YH*	T3YV*			●	2-color display	3-wire	●	●	●	●	●	●	●	●	●
T2YD*	-			●	2-color display	2-wire									
T2YDT*	-			●	AC magnetic field	2-wire									
T2JH*	T2JV*			●	1-color display off-delay	2-wire									

* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

F Switch quantity

R	1 on rod side
H	1 on head side
D	2

G Option

Blank	Rod end female thread
N	Rod end male thread

H Mounting bracket

Blank	Without mounting bracket
LB	Axial foot (made to order)
CB	Clevis bracket (pin and snap ring attached)
FA	Rod side flange (made to order)
FB	Head side flange

I Accessory (available when rod end male thread "N" is selected)	
I	Rod eye
Y	Rod clevis (pin and snap ring attached)

I Accessory

*5

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

SSD2-G-HP1 Series

[Stroke table]

	Stroke (mm)	Applicable bore size									
		12	16	20	25	32	40	50	63	80	100
Long service life cylinder	SSD2	5	●	●	●	●	●	●			
	MDC2	10	●	●	●	●	●	●	●	●	●
	MSD	15	●	●	●	●	●	●	●	●	●
	MSDG-L	20	●	●	●	●	●	●	●	●	●
	SMG	25	●	●	●	●	●	●	●	●	●
	LCR	30	●	●	●	●	●	●	●	●	●
	LCG	35			●	●	●	●	●	●	●
	STM	40			●	●	●	●	●	●	●
	STG	45			●	●	●	●	●	●	●
	STR2	50			●	●	●	●	●	●	●
	SCPD3	75				●	●	●	●	●	●
	CMK2	100				●	●	●	●	●	●
	SCG	Min. Stroke (mm) *1					1				
Environment-resistant cylinder	SSD2	Max. Stroke (mm)	30	50			100				
	SMG	Custom Stroke *2					In 1 mm increments				
	LCR	*1: Less than 5 mm with 1-color display switch and less than 10 mm with the 2-color display, off-delay, AC magnetic field proof, T1* or T8* switch are not available. Refer to page 66 for the min. Stroke with switch.									
STS	STL	*2: The total length when using a custom Stroke is the same as that when using the next longer standard Stroke.									

How to order switch

SW - TOH

Switch model No.
(Page 67 Item E)

How to order mounting brackets

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
Mounting bracket							
Foot (LB)						SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)						SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50
Bore size (mm)	ø63	ø80	ø100				
Mounting bracket							
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA/FB)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				
Clevis bracket (CB)	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100				

*1: The foot mounting bracket is provided as 2 pcs./set.

*2: The ø12 to ø32 structure does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Contact CKD for details.


Consumable parts list

Part name	Kit No.	Part name
Bore size (mm)		
ø12	SSD2-G-12K-HP1	
ø16	SSD2-G-16K-HP1	
ø20	SSD2-G-20K-HP1	Scrapper
ø25	SSD2-G-25K-HP1	Rod packing
ø32	SSD2-G-32K-HP1	Rod metal gasket
ø40	SSD2-G-40K-HP1	Piston packing
ø50	SSD2-G-50K-HP1	Lube keeping structure
ø63	SSD2-G-63K-HP1	
ø80	SSD2-G-80K-HP1	
ø100	SSD2-G-100K-HP1	



Dimensions




● ø12/ø16

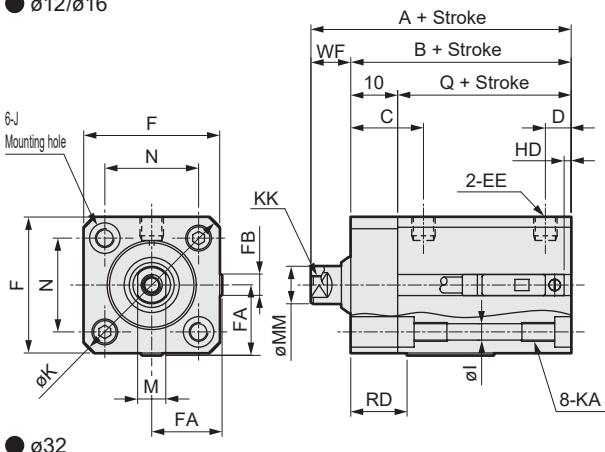


● ø20/ø25

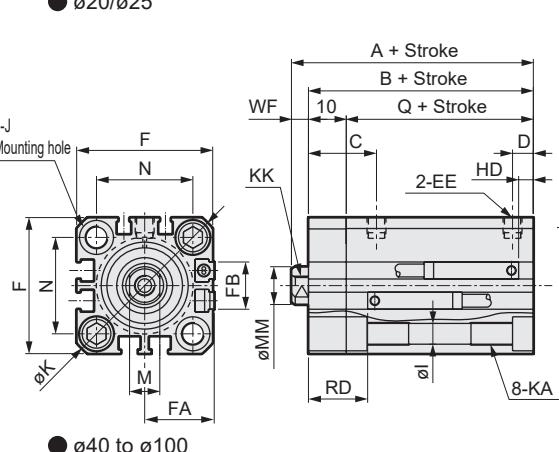● Rod end
Male thread

● ø32

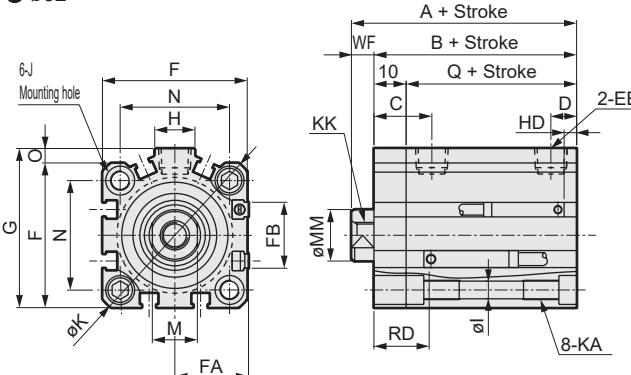

● ø40 to ø100

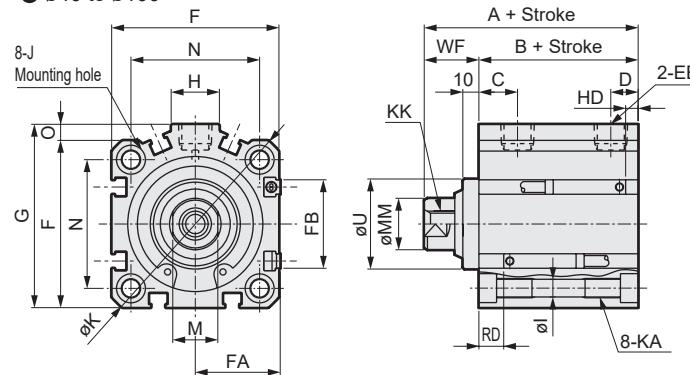

Code	Dimensions without switch						Common dimensions with switch												
	Bore size (mm)	A ^{1,7}	B ^{1,7}	Q ⁷	A ¹	B ¹	Q	C	D	EE ⁸	F	FA ⁴	FB	G	H	I	J ⁹	K	KA
ø12	35.5	27	17	40.5	32	22	15.5	5.5	M5	25	13 (16.5)	4.5	-	-	3.5	6.5 spot face depth 3.5(13.5)	32	M4 depth 7	M3 depth 6
ø16	35.5	27	17	40.5	32	22	15.5	5.5	M5	29	15 (18.5)	4.5	-	-	3.5	6.5 spot face depth 3.5(13.5)	38	M4 depth 7	M4 depth 8
ø20	39	29.5	19.5	49	39.5	29.5	18	5.5	M5	36	18.5 (22)	12.5	-	-	5.5	9 spot face depth 5.5(15.5)	47	M6 depth 11	M5 depth 7
ø25	42.5	32.5	22.5	52.5	42.5	32.5	21	6	M5	40	20.5 (24)	13.5	-	-	5.5	9 spot face depth 5.5(15.5)	51	M6 depth 11	M6 depth 12
ø32	45 (55)	33 (43)	23 (33)	55	43	33	18	8	Rc1/8	45	23 (26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5(15.5)	60	M6 depth 11	M8 depth 13
ø40	51.5 (61.5)	29.5 (39.5)	-	61.5	39.5	-	12	8.5	Rc1/8	52	26.5 (30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	53.5 (63.5)	30.5 (40.5)	-	63.5	40.5	-	10.5	10.5	Rc1/4	64	32.5 (36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	59 (69)	36 (46)	-	69	46	-	13	11	Rc1/4	77	39 (42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	68.5 (78.5)	43.5 (53.5)	-	78.5	53.5	-	16	13	Rc3/8	98	49.5 (53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	80 (90)	53 (63)	-	90	63	-	23	15	Rc3/8	117	59 (62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Common dimensions with switch						Reed T0H/T0V, T5H		Proximity T2H/T2V, T3H/T3V		Proximity T2WHT2WW, T3WHT3VV		Proximity F2WHT2FW, F3YH/F3YV		Proximity F2S/F3S		Dimensions of rod end male thread part							
	M	MM	N	O	U	WF	T5V	T3H/T3V	HD	RD	HD	RD	HD	RD	HD	RD	a'	c'	H	KK'	M	MM	T	wf
ø12	5	6	15.5	-	-	8.5	1.5	11.5	1.5	11.5	3.5	13.5					10.5	9	8	M5	5	6	3.2	8.5
ø16	6	8	20	-	-	8.5	0	14	0	14.5	1	16					12	10	10	M6	6	8	3.6	8.5
ø20	8	10	25.5	-	-	9.5	3	17.5	3	17.5	5	19.5	7.5	22	6.5	21	14	12	13	M8	8	10	5	9.5
ø25	10	12	28	-	-	10	4	19.5	4	19.5	6	21.5	8.5	24	7.5	23	17.5	15	17	M10 x 1.25	10	12	6	10
ø32	14	16	34	4.5	-	12	4	19.5	4	19.5	6	21.5					23.5	20.5	22	M14 x 1.5	14	16	8	10
ø40	14	16	40	5	28	22	7	12	7	12	8.5	13.5					23.5	20.5	22	M14 x 1.5	14	16	8	20
ø50	17	20	50	7	35	23	7.5	12.5	7.5	12.5	9	14					28.5	26	27	M18 x 1.5	17	20	11	20
ø63	17	20	60	7	35	23	12.5	13	12.5	13	14	14.5					28.5	26	27	M18 x 1.5	17	20	1	20
ø80	22	25	77	5	43	25	17.5	15.5	17.5	15.5	19	17					35.5	32.5	32	M22 x 1.5	22	25	13	23
ø100	27	30	94	6.5	59	27	23	19.5	23	19.5	24.5	21					35.5	32.5	41	M26 x 1.5	27	30	16	23

*1: To calculate A + stroke length or B + stroke length when using custom stroke length, apply the next longer standard stroke length (instead of the custom stroke length) to the stroke length value. (Example) If the custom stroke length is 7 mm, apply the standard stroke length of 10 mm.

*2: HD and RD dimensions for 5 mm Stroke differ from these dimensions according to the setting.

3: Refer to "Pneumatic Cylinders I (Catalog No. CB-029SA)" for dimensions of the 2-color display, off-delay, AC magnetic field proof, T1, T8: switches.

*4: Dimensions in () of FA are for the radial lead wire type.

*5: Refer to "Pneumatic Cylinders I (No. CB-029SA)" for dimensions of individual accessories.

*6: Only F switch is available for the piping port surface of bore size ø20, 25.

*7: Dimensions in () of codes A, B and Q are for strokes of more than 50 mm.

*8: The 5 mm stroke of the ø32 without switch has a port size of M5.

*9: Dimensions in () of code J are for the rod side mounting hole.

*10: The ø12, ø16 has no switch groove on the rod end surface. Switches can be mounted only on the head side.

* Refer to double acting/single rod in "Pneumatic Cylinders I" (No. CB-029SA) for dimensions of each mounting type.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	




Compact cylinder
Double acting/single rod/rubber scraper

Environment-resistant cylinder

SMG-G-HP1 Series

● Bore size: Ø6/Ø10/Ø16/Ø20/Ø25/Ø32

JISCode



Specifications

Item	SMG-G-HP1 SMG-GL-HP1 (with switch)					
STM	Bore size mm	Ø6	Ø10	Ø16	Ø20	Ø25 Ø32
STG	Actuation				Double acting	
STR2	Working fluid				Compressed air	
SCPD3	Max. working pressure MPa			0.7		
CMK2	Min. working pressure MPa	0.12		0.06		0.15
SCM	Proof pressure MPa				1.05	
Ambient temperature °C				-10 to 60 (no freezing)		
SCG	Port size			M5		Rc1/8
SSD2	Stroke tolerance mm			+1.5 0		
SMG	Working piston speed mm/s			50 to 500		
LCR	Cushion			With rubber cushion		
STG	Lubrication			Not required		
STS	Allowable absorbed energy J	0.012	0.036	0.1	0.1	0.19 0.5
STL						

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

Stroke

	Bore size (mm)	Standard Stroke (mm)	Min. Stroke (mm)
LSHM-A	Ø6		
LSHM-G	Ø10	5, 10, 15, 20, 25, 30, 40, 50, 60	
LSHM-F	Ø16		
LST	Ø20		5
LSTM	Ø25	5, 10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100	
	Ø32		

*1: The custom Stroke is available in 5 mm increments. However, the total length is the same as that of the next longer standard stroke length.

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Supports food mfg. processes

70

Min. stroke with switch

Bore size (mm)	1-color display		2-color display	
	K □ H	K □ V	K □ YH	K □ YV
Ø6				
Ø10				
Ø16				
Ø20		5		
Ø25				
Ø32			5	

How to order

Without switch (without magnet for switch)

SMG-G - 32 - 25 - HP1

With switch (built-in magnet for switch)

SMG-GL - 32 - 25 - K2H - R - HP1**A Model No.****B Bore size****C Port thread****D Stroke****E Switch model No.****F Switch quantity****Precautions for model No. selection*****1: Refer to page 70 for min. stroke with switch.*****2: Copper and PTFE free as standard.****[Example of model No.]****SMG-GL-6-15-K0H-R-HP1**

Model: Compact cylinder

B Bore size : ø6 mm**C** Port thread : Rc thread**D** Stroke : 15 mm**E** Switch model No. : Reed switch K0H, lead wire length 1 m**F** Switch quantity : 1 on rod side**How to order switch****SW - K2H**Switch model No.
(Item **E** above)

Code	Description
A Model No.	
SMG-G	Double acting/single rod/rubber scraper
SMG-GL	Double acting/single rod/rubber scraper/with switch

B Bore size (mm)	
6	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Port thread	
Blank	Rc thread
NN	NPT thread (ø32 only) (made to order)
GN	G thread (ø32 only) (made-to-order product)

D Stroke (mm)		Applicable bore size					
Standard Stroke	ø6	ø6	ø10	ø16	ø20	ø25	ø32
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●
		●	●	●	●	●	●

E Switch model No.	
Lead wire straight Rate type	Lead wire L-shaped
K0H*	K0V*
K5H*	K5V*
K2H*	K2V*
K3H*	K3V*
K3PH*	K3PV*
K2YH*	K2YV*
K3YH*	K3YV*
Reed	
Proxy	
Indicator	
Lead wire	
1-color display	2-wire
No indicator lamp	3-wire
1-color display	2-wire
1-color display (made to order)	3-wire
2-color display	2-wire
2-color display	3-wire

* Lead wire length	
Blank	1 m (standard)
3	3 m
5	5m

F Switch quantity	
R	1 on rod side
H	1 on head side
D	2

Consumable parts list (Note: Specify the kit No. when placing an order.)

Bore size (mm)	Kit No.	Part name
ø6	SMG-G-6K-HP1	Scraper, lube keeping structure, CR ring snap ring
ø10	SMG-G-10K-HP1	Rod packing, cushion rubber R, piston
ø16	SMG-G-16K-HP1	Packing, cushion rubber H, cover gasket
Bore size (mm)	Kit No.	Part name
ø20	SMG-G-20K-HP1	Scraper, lube keeping structure, rod packing,
ø25	SMG-G-25K-HP1	Cushion rubber R, piston packing,
ø32	SMG-G-32K-HP1	Cushion rubber H, cover gasket


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

SMG-G-HP1 Series


Dimensions



- Double acting SMG-G(L)-HP1
- ø6/10/16

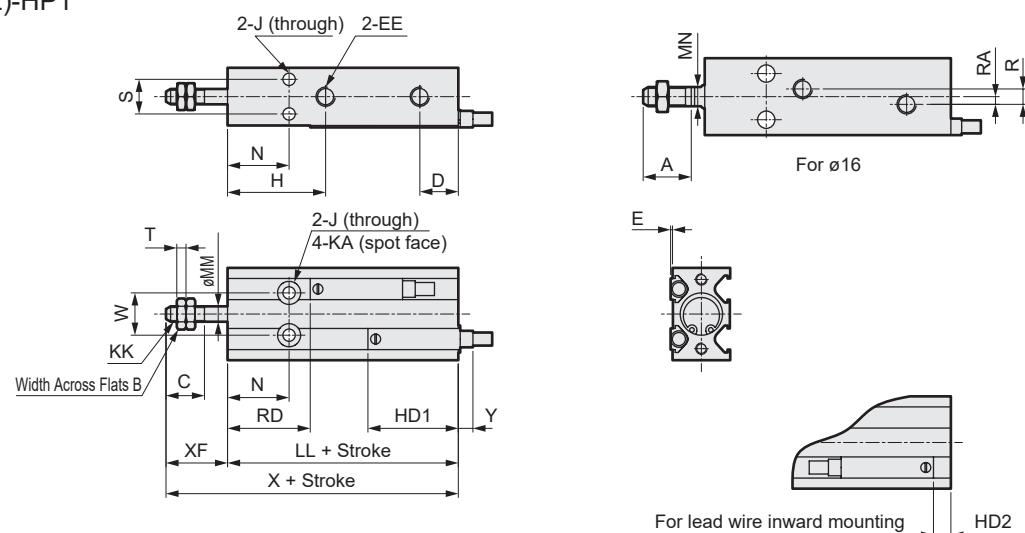

- ø20/ø25/ø32

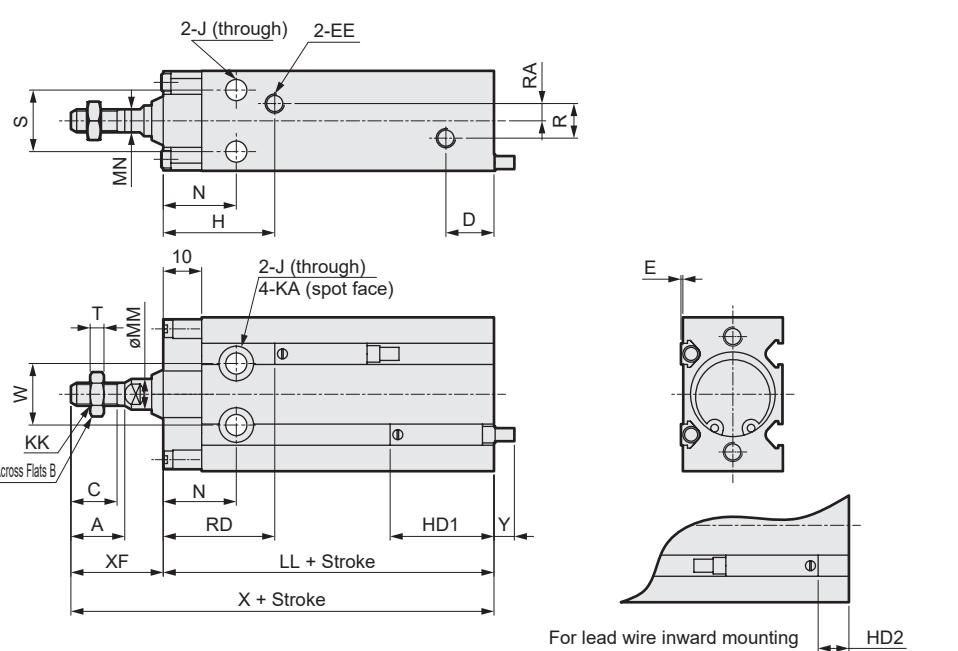

Code	A	B	C	D	EE	F	G	H	HH	I	J	K	KA	KK	MM	MN	N	R	RA	S	
MSD MSDG-L																					
SMG	-	5.5	7	10	M5	13	22	24.5	M3 depth 5	-	3.2	-	6 depth 4.8	M3	3	-	16.5	-	-	7	
STG	-	7	10	10	M5	15	24	26	M3 depth 5	-	3.2	-	6 depth 5	M4	4	-	16.5	-	-	9	
STM	12.5	8	11	11.5	M5	20	32	26 (*1)	M4 depth 6	-	4.5	-	7.5 depth 6.5	M5	6	5	16.5	4	2	12	
LCR	ø20	14	10	12	12.5	M5	26	40	29	M5 depth 8	39	5.5	25.8	9 depth 8	M6	8	6	19	9	4.5	16
LCG	ø25	18	13	15.5	13	M5	32	50	31.5	M5 depth 8	49	5.5	22	9 depth 9	M8	10	8	20	9	4.5	20
STR2	ø32	22	17	19.5	12.5	Rc1/8	40	62	33	M6 depth 9	61	6.6	29	11 depth 11.5	M 10 x 1.25	12	10	21	13.5	4.5	24

Code	T	U	W	XF	LL		X		E	HD1	HD2	RD	Y (*2)	
Bore size	Without switch	With switch	HD1	HD2	RD	Y (*2)								
LSH-A	1.8	17	10	13	42.5	42.5	55.5	55.5	1	20	1	22.5	7	
LSH-G														
LSH-F	ø6	2.4	18	11	16	45.5	45.5	61.5	61.5	1	23.5	4.5	22	3.5
LSHL-A	ø10	3.2	25	14	16	39.5	49.5	55.5	65.5	0.5	24.5	5.5	25	2.5
LSHL-G	ø16	3.6	30	16	24	46	56	70	80	0.5	27	8	29	0
LSHL-F	ø20	5	38	20	28	50	60	78	88	0.5	29	10	31	-2
SCPD3														
CMK2	ø25	6	48	24	32	52	62	84	94	0.5	30.5	11.5	31.5	-3.5
SCM														
SCG														
SSD2														
STG														

*1: 24 for 5 stroke without switch

*2: Y dimensions indicate the protruding dimensions from the end surface of the switch body. (Negative dimensions indicate the pull dimensions from the end surface of the body)


*3: To calculate LL+ Stroke or X+ Stroke when using custom Stroke, apply the next longer standard Stroke (instead of the custom Stroke) to the Stroke value. (Example: If the custom Stroke is 35 mm, apply the standard Stroke of 40 mm)

*4: Refer to page 73 for HD, RD, and protruding dimensions of 2-color display switches.


SMG-G-HP1 Series with switch common Dimensions (2-color display)

● SMG-GL-HP1 (With switch: K2Y^{H/V}, K3Y^{H/V})

● ø6/10/16

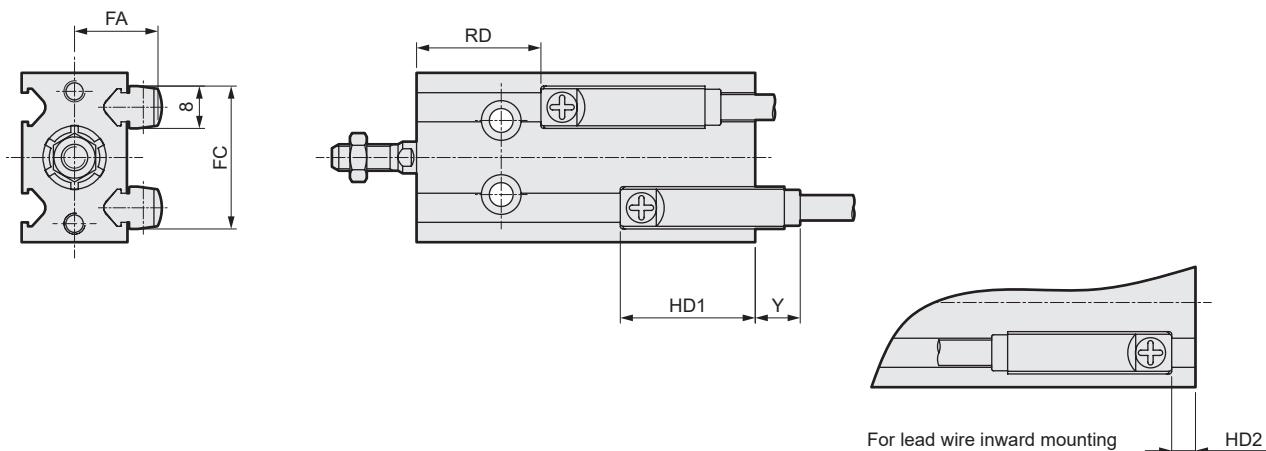

● ø20/25/32

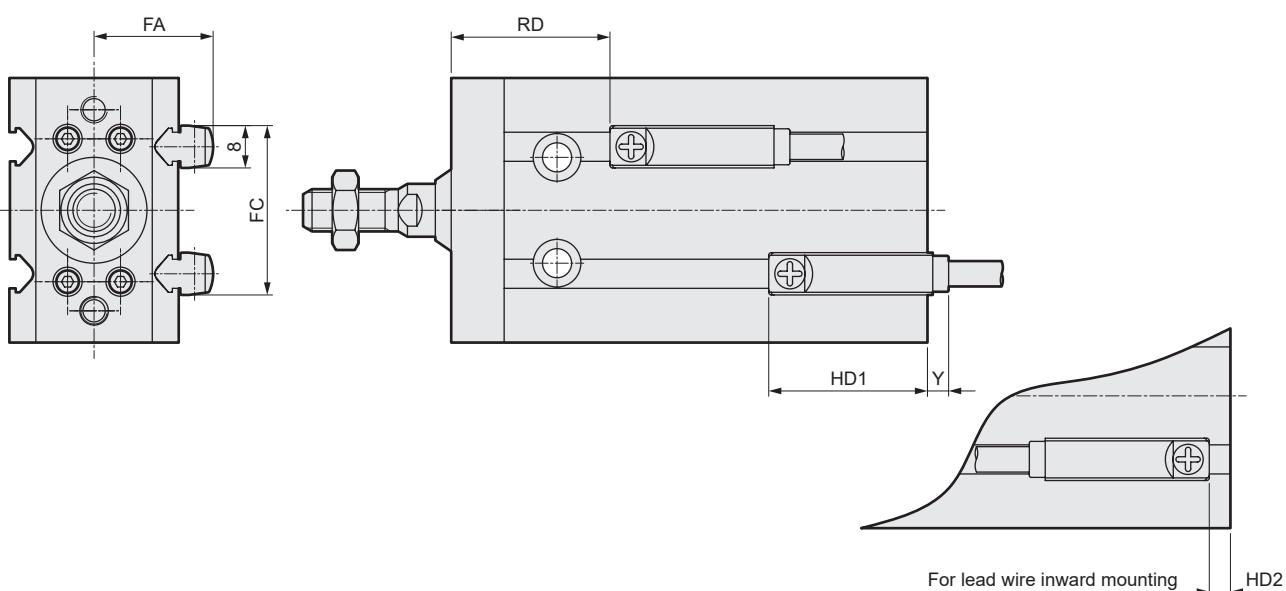

Code Bore size	FA	FC	HD1	HD2	RD	Y	
						Lead wire Straight Type	Lead wire L-shaped Type
ø6	13.5	18	21	0	21.5	13	10
ø10	14.5	21	24.5	3.5	21	9.5	6.5
ø16	16.5	27	25.5	4.5	24	8.5	5.5
ø20	19.5	29	28	7	28	6	3
ø25	22.5	32	30	9	30	4	1
ø32	26.5	34	31.5	10.5	30.5	2.5	-0.5

*1: Y dimensions indicate the protruding dimensions from the end surface of the switch body. (Negative dimensions indicate the pull dimensions from the end surface of the body)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMGLinear slide cylinder
Double acting/single rod/rubber scraper

Environment-resistant cylinder

LCR-G-HP1 Series

● Bore size: ø6/ø8/ø12/ø16/ø20/ø25

JISCode

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Specifications

Descriptions		LCR-G-HP1						
LCG	Bore size mm	ø6	ø8	ø12	ø16	ø20		
STM	Actuation			Double acting				
STG	Working fluid			Compressed air				
STR2	Max. working pressure MPa			0.7				
SCPD3	Min. working pressure MPa			0.15 (*1)				
CMK2	Proof pressure MPa			1.05				
SCM	Ambient temperature °C			-10 to 60 (no freezing)				
SCG	Port size	Main body side	M3	M5	Rc1/8			
SSD2		Main body back	-	M3	M5	Rc1/8		
SMG	Stroke tolerance mm			+2.0	(*2)			
LCR				0				
STG	Working piston speed mm/s			50 to 500 (*3)				
STS	STL	Cushion		With rubber cushion				
LSH-A	Lubrication			Not required				

*1: 0.2 MPa when using ø6 shock absorber type stopper.

*2: Note that there will be a slight gap between the end plate and floating bush if no stopper is attached.

*3: Keep within 50 to 200 mm/s when using a stroke adjusting stopper.

*4: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.

Stroke

	Bore size (mm)	Standard Stroke (mm)
LSH-G	ø6	10, 20, 30, 40, 50
LSH-F	ø8	10, 20, 30, 40, 50, 75
LSHL-A	ø12	10, 20, 30, 40, 50, 75, 100
LSHL-G	ø16	10, 20, 30, 40, 50, 75, 100, 125
LSHL-F	ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
LSHM-A	ø25	10, 20, 30, 40, 50, 75, 100, 125, 150
LSHM-G		
LSHM-F		
LST		
LSTM		
ABP2		

Note: Products with Strokes other than the above are not available.

SCPD3
CMK2
SCM
SSD2

Allowable absorbed energy(Eo)

Bore size	Standard (J)	With stroke adjusting stopper (J)	With shock absorber stopper (J)
MSD	0.025	0.0032	0.14
MSDG-L	0.058	0.0032	0.25
SMG	0.112	0.014	0.25
STG	0.176	0.043	0.65
STM	0.314	0.055	1.3
LCR			
LCG			
STR2			
LSH-A			
LSH-G			
LSH-F			
LSHL-A			
LSHL-G			
LSHL-F			

SCPD3
CMK2
SCM
SCG
SSD2
STG

How to order

Without switch(built-in magnet for switch)

LCR-G - 8 - 40 — **S506 DTN - HP1**

With switch(built-in magnet for switch)

LCR-G - 12 - 40 - F2H* - R - S506 DTN - HP1

Model No.

A Tube
Bore size

B Stroke

D Switch
quantity

F Option

C Switch model No.

Precautions for model No. selection

- *1: For the adjustable stroke range with a shock absorber stopper, refer to the stopper dimensions table on page 94 .
- *2: For the port position, refer to the stopper dimensions on page 94 .
- *3: The port position of the standard without stopper is ①and ③ position.
- *4: Refer to stoppers "C**" and "W**" for combination of the stroke adjusting stopper and shock absorber type stopper.
- *5: Can be selected for the type with stopper only.
- *6: Refer to the selection table on page 78 for combinations of options.
- *7: A1**, A2**, A5** and A6** of ø6 to ø8-10st, ø12 to ø25-20st or less cannot be adjusted with the standard stopper, so they are made to order.
- *8: Select the F/H type switch when using the type with two switches with S *** or A *** for ø6 to ø8-30st or less.
- *9: Select when using rear piping.
- *10: Can be selected only when using stroke adjusting stopper (S) and one side mixed type (C).
- *11: When using the W3 to 6 (two-sided combined stopper) with ø6 (full st) ø 8-20st to 30st, ø12-30st to 50st and ø16-30st to 50st, use a lead wire straight type when using the type with two switches or the head side.
- *12: Cannot be selected when choosing two-sided combined type (W).
- *13: The adjustable stroke range when choosing two-sided combined type (W) is ø6:9 mm, ø8:13.5 mm, ø12:14.5 mm, ø16:15 mm, ø20:13 mm, ø25:10 mm
- *14: The stroke adjusting stopper for 0.3MPa and over working pressure is the metal sealing type.
- *15: The shock absorber specs. is not dust-proof.

[Example of model No.]

LCR-G-12-40-F2H-R-A1DT-HP1

Model:Linear slide cylinder double acting/single rod LCR

A Bore size : ø12

B Stroke : 40mm

C Switch model No. : Proximity/2-wire
Axial lead wire


D Switch quantity : 1 on rod side

E Stopper : Shock absorber stopper
Stopper position

F Option : With side and bottom ports
Material, steel (nitriding)

E Stopper

● Stopper position



Code	Description				
A Bore size (mm)					
6	ø6				
8	ø8				
12	ø12				
16	ø16				
20	ø20				
25	ø25				

		Bore size (ø)				
		6	8	12	16	20
10	10	●	●	●	●	●
20	20	●	●	●	●	●
30	30	●	●	●	●	●
40	40	●	●	●	●	●
50	50	●	●	●	●	●
75	75	●	●	●	●	●
100	100	●	●	●	●	●
125	125	●	●	●	●	●
150	150	●	●	●	●	●

Axial lead wire	Radial lead wire	Contact	Voltage	Display	Lead wire	Bore size				
						ø6	ø8	ø12	ø16	ø20
-	F2S*	AC	●	2-wire						
-	F3S*	DC	●	3-wire						
F2H*	F2V*	AC	●	1-color display	2-wire					
F3H*	F3V*	DC	●	3-wire						
F3PH*	F3PV*	AC	●	1-color display(PNP output)(Made to order)	3-wire					
F2YH*	F2YV*	DC	●	2-color display	2-wire					
F3YH*	F3YV*	DC	●	3-wire						
T0H*	T0V*	AC	●	1-color display	2-wire					
T5H*	T5V*	DC	●	No indicator lamp						
T2H*	T2V*	AC	●	1-color display	2-wire					
T3H*	T3V*	DC	●	3-wire						
T2HR3	T2VR3	AC	●	1-color display Bending resistant lead wire	2-wire					
T3PH*	T3PV*	DC	●	1-color display (PNP output) (Made to order)	3-wire					
T2WH*	T2WV*	DC	●	2-color display	2-wire					
T3WH*	T3WV*	DC	●	3-wire						

* Lead wire length

Blank	1 m (standard)	●
3	3 m (option)	●
5	5 m (option)	●

D Switch quantity

R	1 on rod side
H	1 on head side
D	2

E Stopper

76 page for details on the [Stopper].

F Option

Blank	Port on stopper: without port
D	Port on stopper: side and bottom ports *2, *5, *12

Blank	Stopper block material: Steel
T	Stopper block material: steel (nitriding) *5

Plug included

Blank	No
N	With side piping port plug (not available for ø6, ø25) *9

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	Environment-resistant cylinder
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Low-profile long stroke hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series






















[E] Stopper

Code		Description		Code		Description		
E Stopper								
SSD2	Blank	No option		C One side hybrid stopper mix (shock absorber stopper, stroke adjusting stopper)				
MDC2	S1**	Stopper position① (Can be changed to ④)		C1**	A1 + S3		Stopper Installation position	
MSD	S2**	Stopper position② (Can be changed to ③)		C2**	A2+S4			
MSDG-L	S3**	Stopper position③ (Can be changed to ②) *16		C3**	A3+S1			
SMG	S4**	Stopper position④ (Can be changed to ①) *16		C4**	A4+S2			
LCR	S5**	Stopper position①, ③		** part Adjustable stroke range ● Compatible with all. ▲ Compatible with some. *11				
LCG	S6**	Stopper position②, ④		Stopper model No.				
A Shock absorber stopper		*1, *4, *7		Protruding end	Return end	S A W C		
STM	A1	Stopper position① (Can be changed to ④)		Blank	5 mm or none	5 mm or none	●	
STG	A2	Stopper position② (Can be changed to ③)		02	15 mm or none	15 mm or none	●	
STR2	A3	Stopper position③ (Can be changed to ②) *16		03	25 mm or none	25 mm or none	●	
SCPD3	A4	Stopper position④ (Can be changed to ①) *16		04	15 mm	5 mm	▲	
CMK2	A5	Stopper position①, ③		05	25 mm	5 mm	▲	
	A6	Stopper position②, ④		06	5 mm	15 mm	▲	
				07	5 mm	25 mm	▲	
SCM	W Two-sided combined double stopper(Shock absorber stopper, metal stopper)		*12, *14					
SCG	W1	A1 + metal stopper						
SSD2	W2	A2 + metal stopper						
SMG	W3	A3 + metal stopper						
LCR	W4	A4 + metal stopper						
STG	W5	A5 + metal stopper						
STG	W6	A6 + metal stopper						

Stopper model No. selection method

1 Stopper combination table

Model No.-[① Stopper type] [② Stopper position][③] Example) LCR-G-8-40-[S] [5]06-HP1

		Stroke adjustable (one side)	Shock absorber(One side)	Two-sided combined double stopper	One side hybrid stopper mix	Stopper model No. [①]
		[S]	[A]	[W]	[C]	
Linear Slide Hand	Stopper position model No. [②]	[1]	[S1] 	[A1] 	[W1] 	[C1] 
		[2]	[S2] 	[A2] 	[W2] 	[C2] 
		[3]	[S3] 	[A3] 	[W3] 	[C3] 
		[4]	[S4] 	[A4] 	[W4] 	[C4] 
		[5]	[S5] 	[A5] 	[W5] 	
		[6]	[S6] 	[A6] 	[W6] 	

▲ shows the piping direction. If two-sided combined type (W) is selected, the stopper bracket comes with piping on both sides, ▲ (piping direction) and the reverse side stopper bracket comes with a plug.

■ : Shock absorber stopper
 ■ : Stroke adjusting stopper (adjusting range 5 mm)
 ■ : Metal adjusting stopper (adjusting range 15 mm)

Stopper model No. selection method

2 Stopper combination table

Model No. -[① ② Stopper type][③ Adjustable stroke range]

(Example) LCR-G-8-40-S5[06]-HP1

For stroke adjusting stopper -S

■: Stroke adjusting stopper (adjusting range 5 mm)
 □: Stroke adjusting stopper (adjusting range 15 mm)
 ▲: Stroke adjusting stopper (adjusting range 25 mm)

Adjustable stroke range model No. [③]	Stopper adjusting range		Stopper model No. [①②]					
	Protruding end	Return end	[S1]	[S2]	[S3]	[S4]	[S5]	[S6]
[③]	Blank	5 mm or None	5 mm or None					
	[02]	15 mm or None	15 mm or None					
	[03]	25 mm or None	25 mm or None					
	[04]	15 mm	5 mm					
	[05]	25 mm	5 mm					
	[06]	5 mm	15 mm					
	[07]	5 mm	25 mm					

▲ shows the piping direction. Shock absorber [A], Cannot be selected for two-sided combined type [W]N.

3 For one side hybrid stopper mix -C

■: Shock absorber stopper

□: Stroke adjusting stopper (adjusting range 15 mm)

▲: Stroke adjusting stopper (adjusting range 5 mm) ▲: Stroke adjusting stopper (adjusting range 25 mm)

Adjustable stroke range model No. [③]	Stopper adjusting range		Stopper model No. [④]			
	Protruding end	Return end	[C1]	[C2]	[C3]	[C4]
[③]	Blank	5 mm or Shock absorber				
	[02]	15 mm or Shock absorber				
	[03]	25 mm or Shock absorber				

▲ shows the piping direction.

For the adjustable stroke range with a shock absorber type, refer to the stopper dimensions

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series

The table above also applies to combinations with option code D (with port on stopper) or T (steel stopper block (nitriding)).

Supports food mfg. processes	Compatible with rechargeable batteries		Lithium
	Low-profile long stroke hand	High-profile long stroke hand	
LSHM-G	LST	LSTM	ABP2
LSHM-F	SCPD3	CMK2	Air Booster
	SCM	SSD2	
	MSD	MSD-L	
	MSDG-L	SMG	
	STG	STM	
	STM	LCR	
	LCR	LCG	
	LCG	STR2	
	STR2	LSH-A	
	LSH-A	LSH-G	
	LSH-G	LSH-F	
	LSH-F	LSHL-A	
	LSHL-A	LSHL-G	
	LSHL-G	LSHL-F	
	LSHL-F	SCPD3	
	SCPD3	CMK2	
	CMK2	SCM	
	SCM	SCG	
	SCG	SSD2	
	SSD2	STG	
	STG		

How to order switch

ø6 to ø12

SW - F2H

Switch model No.
(Page 75 Item C)

For ø16 to ø25

SW - T2H3

Switch model No.
(Page 75 Item C)

● For buffer

SW - F 2 V 3

Output

Output

2	DC 2-wire proximity
3	DC 3-wire proximity

Radial lead wire

Lead wire length

Blank	1 m (standard)
3	3 m (option)

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Linear Slide Hand

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

Low-profile long stroke hand

ABP2

Air Booster

SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STS
STL


Compatible with rechargeable batteries

How to order a stopper set

- Set of a stopper and stroke adjusting stopper or shock absorber stopper
- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

LCR - 12 - S 2 D - S02

Bore size
(Page 75 Item A)

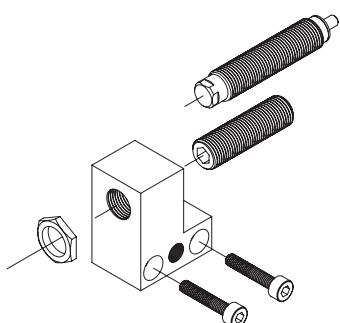

A Stopper type

S	Stroke adjusting stopper
A	Shock absorber stopper

B Stopper installation position *1

1	For ① or ④ stopper position
2	For ② or ③ stopper position

C Port on the stopper

Blank	Without port
D	With side and bottom ports

D Adjustable Stroke *2/*3

Blank	Adjustable stroke range 5 mm
S02	Adjustable stroke range 15 mm
S03	Adjustable stroke range 25 mm

Note) Bottom port is plug-sealed. ø20. When using the bottom port with 25, buy a plug kit (LCR-20-N 2 pieces/set) and seal the side surface ports before use.

Precautions when purchasing the stopper set

-: Not applicable

When the stopper set is installed in the mounting position ① or ②(refer to page 75), note that the adjustable stroke length will be as shown on the right according to the stroke length.

Model No. code	Option code		Discrete stroke adjusting stopper		
	Bore size	Stroke	-5	-15	-25
LCR Series	ø6, ø8	10	S02	-	-
		20 or more	Blank	S02	-
	ø12 to ø25	10	S03	-	-
		20	S02	S03	-
	30 or more	Blank	S02	S03	

● Stopper set weight

(Unit : g)


Stopper type	S1,S2		
Port on the stopper	Blank, D		
Adjustable Stroke	Blank	S02	S03
ø6	15	18	-
ø8	21	25	-
ø12	28	31	34
ø16	42	47	52
ø20	77	85	92
ø25	87	94	101

LCR-G-HP1 Series

How to order discrete stopper bracket

- Used when changing between □1 (□3) and □2 (□4) or when changing to the stopper with port.

□:SA



LCR - 12 - STB 1 D

Bore size
(Page 75 Item A)

A Stopper installation position

1	For ① or ④ stopper position
2	For ② or ③ stopper position

B Port on the stopper

Blank	Without port
D	With side and bottom ports


Note) Bottom port is plug-sealed. When using the bottom port with ø20 and 25, purchase a plug kit (LCR-20-N 2 pieces/set) and seal the side surface ports before use.

- Stopper bracket weight (Unit : g)

Stopper installation position	1,2
Port on the stopper	Blank, D
ø6	8
ø8	14
ø12	20
ø16	29
ø20	53
ø25	62

How to order discrete stroke adjusting stopper

- Hexagon socket set screw with urethane
- Use when changing the adjustable stroke range or when using a custom Stroke.



LCR - 12 - S02

Bore size
(Page 75 Item A)

A Adjustable stroke range

S01	Single side 5 mm (standard)
S02	Single side 15 mm
S03	Single side 25 mm

● Select S01, S02 or S03 in .

Note: S03 is not available for ø6 and ø8. Some models may not be available and adjustable stroke range may differ from the above depending on the Model No.

Precautions when purchasing discrete stopper

When a discrete stroke adjusting stopper or a discrete shock absorber stopper is installed in the ① or ② position (refer to page 75), the combination will be as shown on the right according to the stroke and adjustable stroke.


Model No. code	Option code	Discrete stroke adjusting stopper			Discrete shock absorber stopper
		Adjustable Stroke (mm)			
Bore size	Stroke	-5	-15	-25	
LCR Series	ø6, ø8	10	S02	-	-
-S1, S2, S5, S6	20 or more	S01	S02	-	A01
-A1, A2, A5, A6	ø12 up	10	S03	-	-
	ø25	20	S02	S03	-
		30 or more	S01	S02	S03
					A01

- Discrete stroke adjusting stopper weight (Unit : g)

Adjustable stroke range	S01	S02	S03
ø6	6	9	-
ø8	7	10	-
ø12	7	11	14
ø16	11	16	22
ø20	22	30	37
ø25	23	30	37

How to order discrete shock absorber stopper

- Shock absorber set
- Use when changing from the stroke adjusting stopper to the shock absorber stopper

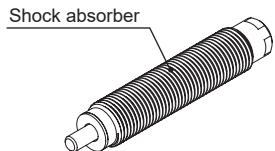

LCR - 12 - A01

Bore size
(Page 75 Item A)

Note: Some models may not be available depending on the specifications. Refer to page 75. For the shock absorber type stopper adjustable stroke range, refer to page 94.


Note: The shock absorber specs. is not dust-proof.

Applicable shock absorber model No.

Model	Shock absorber model No.	Weight (g)
LCR-6	SKL-0804	9
LCR-8	SKL-0805	12
LCR-12	SKL-0805	12
LCR-16	SKL-1006	19
LCR-20	SKL-1208	31
LCR-25	SKL-1208	31

How to order discrete stopper block

- Use it when changing from the standard to the stroke adjusting stopper or shock absorber stopper.

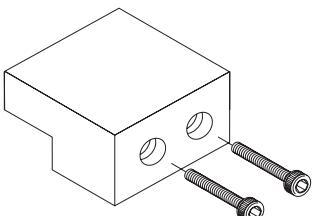

LCR - 12 - SB1 T

Bore size
(Page 75 Item A)

A Stopper block

SBL	For ø6:30 Stroke or less For ① or ③ stopper position
SBR	For ø6:30 Stroke or less For ② or ④ stopper position
SB1	ø8: For 30 Stroke or less ø12 to ø25: For 50 Stroke or less
SB2	ø6/ø8: For 40 Stroke or more ø12 to ø25: For 75 Stroke or more

B Material

Blank	Stopper block material: Steel
T	Stopper block material: steel (nitriding)

- Discrete stopper block weight

(Unit : g)

Block	SBL/SBR/SB1(T)	SB2(T)
ø6	14	21
ø8	14	24
ø12	23	37
ø16	38	72
ø20	60	99
ø25	112	206

Model No. of plug kit for side piping port

LCR - 12 - N (2/set)

Bore size
(Page 75 Item A)

- Weight of plug kit for side piping port

Bore size	Weight (g)
ø8	1
ø12	1
ø16	1
ø20	5

LCR repair parts list

Bore size (mm)	Kit No.	Part name
ø6	LCR-G-6K-HP1	Scraper
ø8	LCR-G-8K-HP1	Lube keeping structure
ø12	LCR-G-12K-HP1	Metal gasket
ø16	LCR-G-16K-HP1	Rod packing
ø20	LCR-G-20K-HP1	Cushion rubber (R)
ø25	LCR-G-25K-HP1	Piston packing
		Cover gasket
		Cushion rubber (H)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series

Dimensions (bore size: ø6)



● LCR-G-6-HP1

Stroke: 10, 20, 30

(Body mounting hole in the figure shows 30 mm Stroke)

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

LST

LSTM

Air Booster

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G


LSHL-F

LSHM-A


LSHM-G

LSHM-F

Supports food mfg. processes

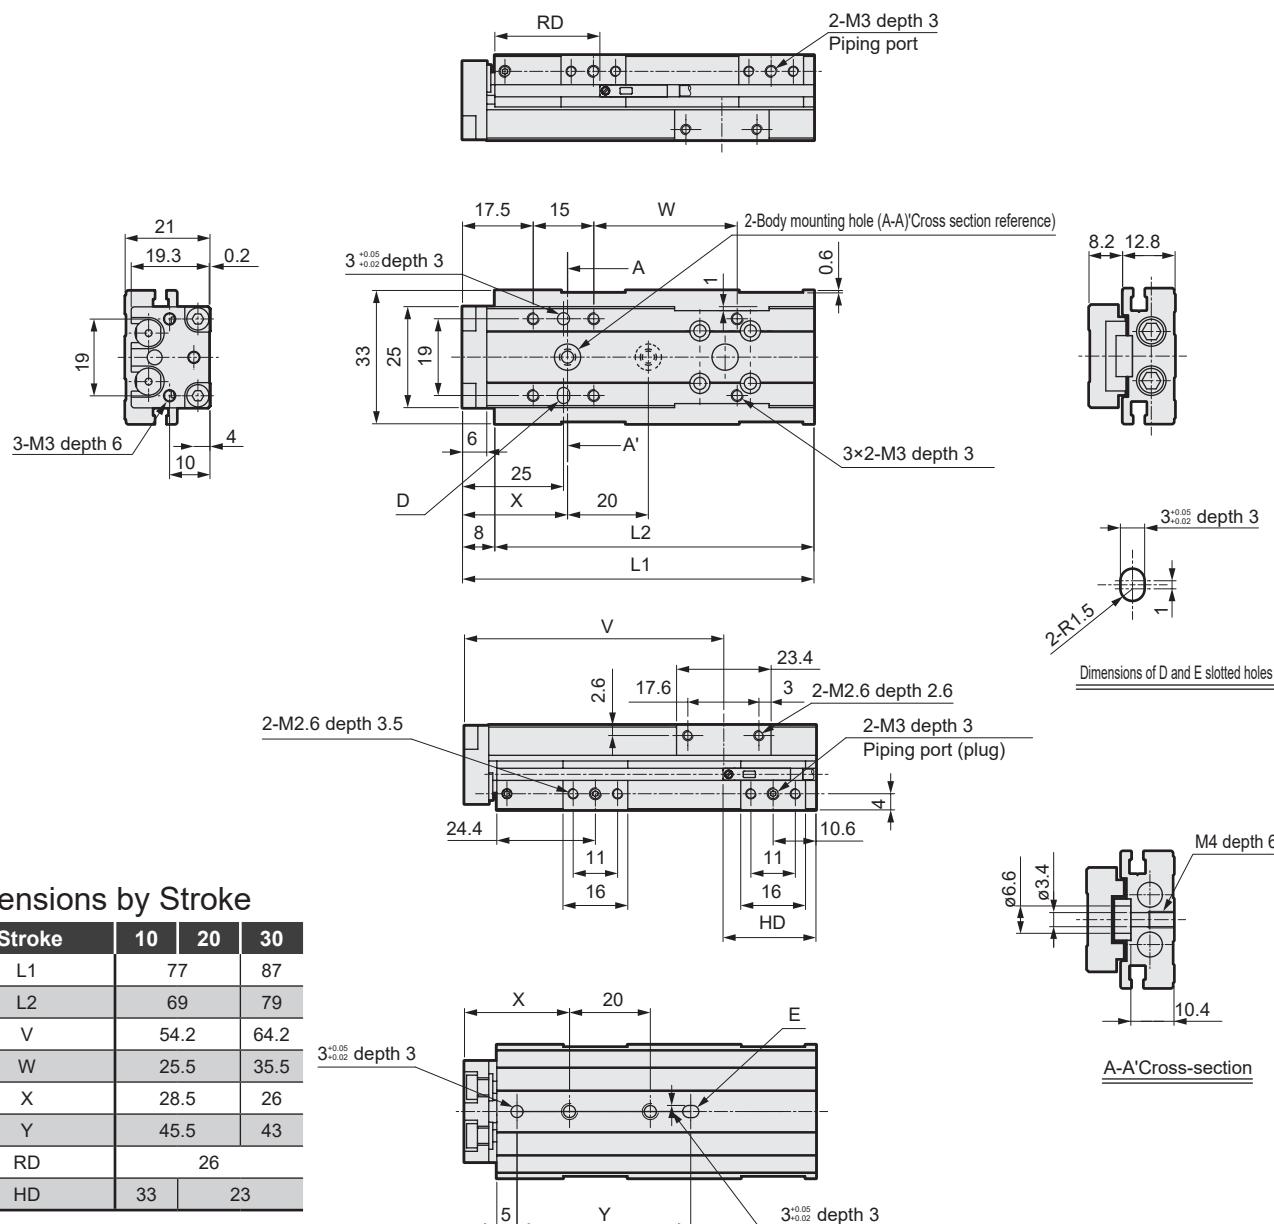


● Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

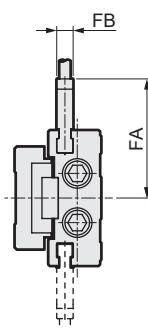

Stroke	10	20	30
FA		29.1	
FB		4	
RD		25	
HD	34	24	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of the pin is JIS tolerance m6 or less.

*2: For 30 mm Stroke, one hole is available which is not used for linear guide due to manufacturing reasons.

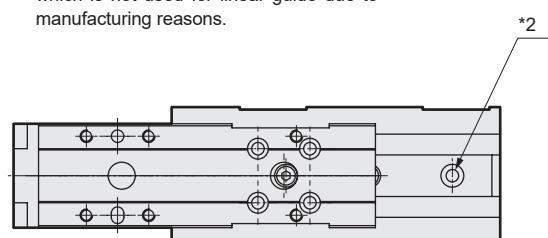


Dimensions (bore size: ø6)



● LCR-G-6-HP1

Stroke: 40, 50


(Body mounting hole in the figure shows 50 mm Stroke)

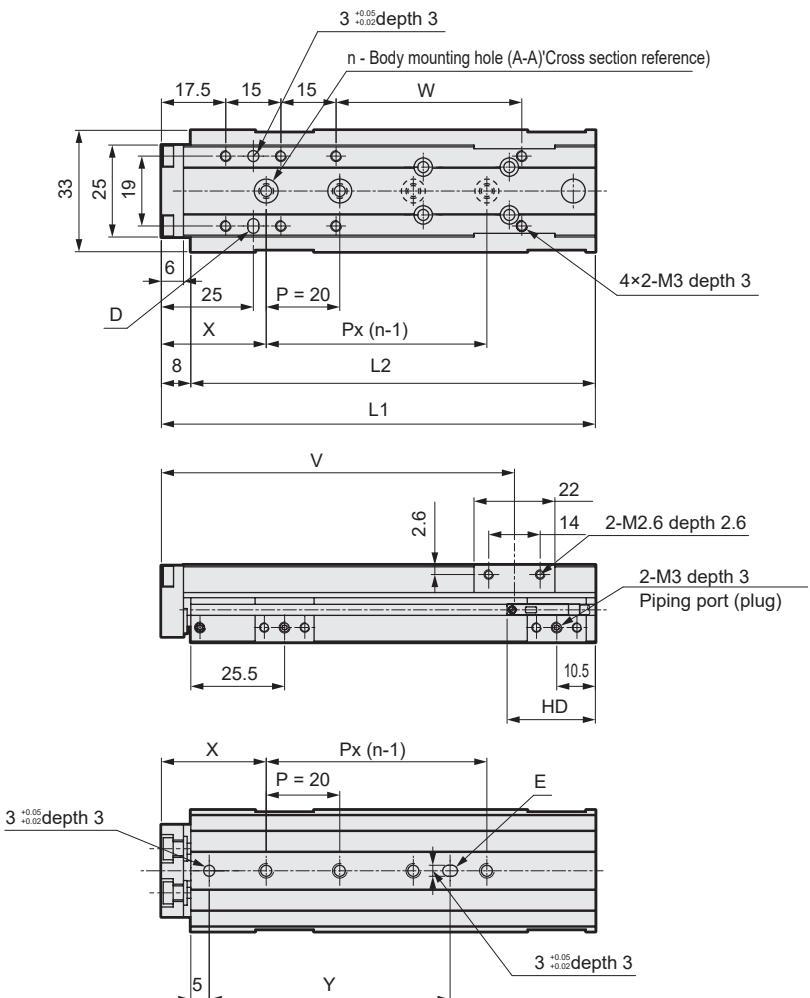

Dimensions by Stroke

Stroke	40	50
L1	108	118
L2	100	110
n	3	4
V	86	96
W	40.5	50.5
X	27	28.5
Y	44	65.5
RD	26	
HD	24	


● Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

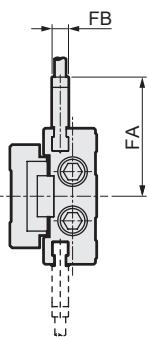

Stroke	40	50
FA	29.1	
FB	4	
RD	25	
HD	25	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of the pin is JIS tolerance m6 or less.

*2: For 40 mm Stroke, one hole is available which is not used for linear guide due to manufacturing reasons.

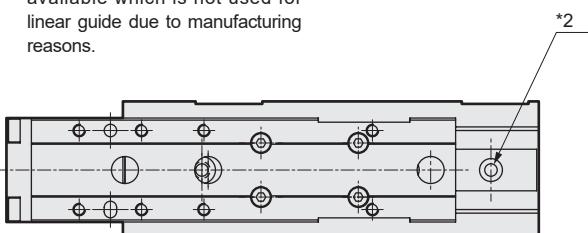

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series


Dimensions (bore size: ø8)




● LCR-G-8-HP1

Stroke: 10, 20, 30

(Body mounting hole in the figure shows 30 mm Stroke)

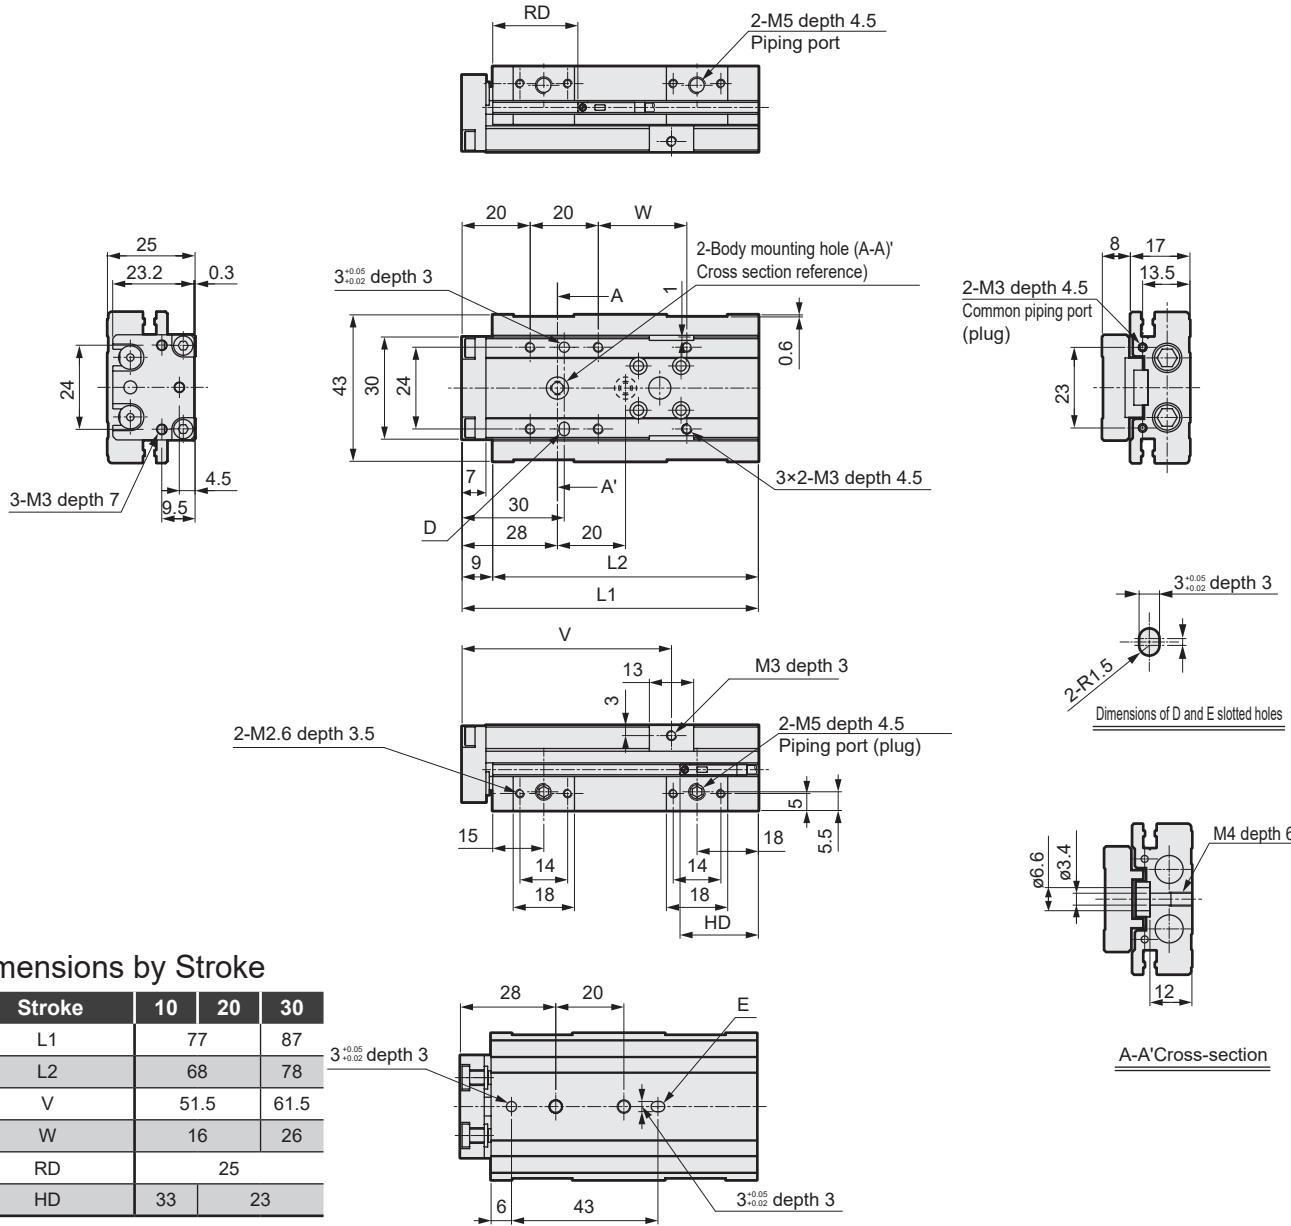

● Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

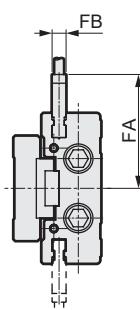


Stroke	10	20	30
FA		32.6	
FB		4	
RD		24	
HD	34	24	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common; Piping in Pneumatic Cylinders II (No. CB-030SA).

*3: For 30 mm Stroke, one hole is available which is not used for linear guide due to manufacturing reasons.

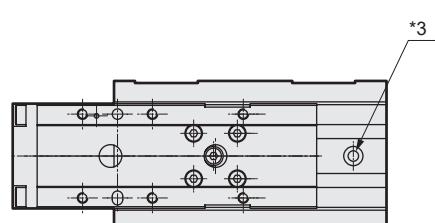

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Environment-resistant cylinder

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Linear Slide Hand

LST
LSTM

Air Booster
Low-profile long stroke hand

ABP2
SCPD3
CMK2
SCM
SCG
SSD2
STG

Compatible with rechargeable batteries

Supports food mtg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STG

84


Dimensions (bore size: ø8)



● LCR-G-8-HP1


Stroke: 40, 50, 75

(Body mounting hole in the figure shows 50 mm Stroke)

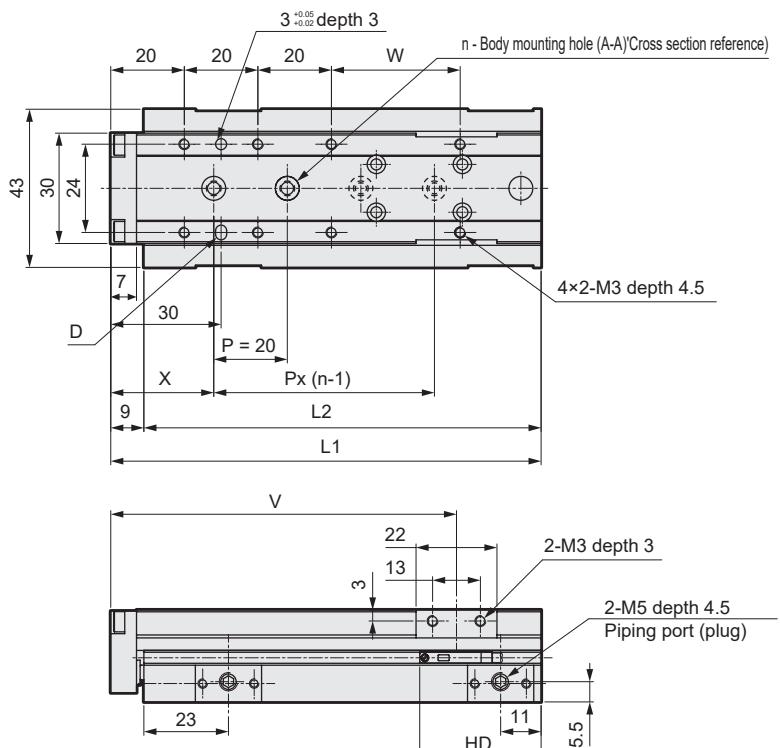


Dimensions by Stroke

Stroke	40	50	75
L1	107	117	142
L2	98	108	133
n	3	4	5
V	84	94	119
W	25	35	60
X	26.5	28	25
Y	41.5	63	80
RD		25	
HD		33	

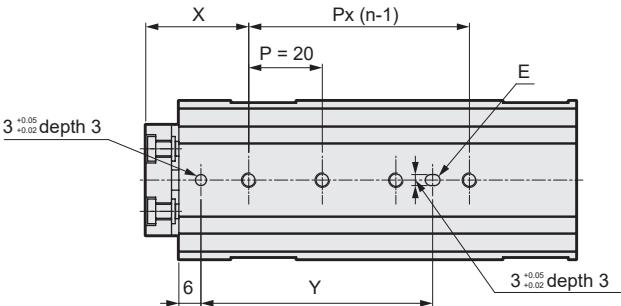

- Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

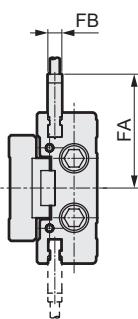


Stroke	40	50	75
FA		32.6	
FB		4	
RD		24	
HD		34	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common; Piping in Pneumatic Cylinders II (No. CB-030SA).

*3: 40 and 75 mm Stroke have one hole opened for manufacturing reasons not to use for linear guide.

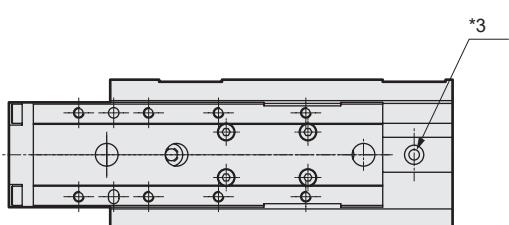

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series


Dimensions (bore size: Ø12)



● LCR-G-12-HP1

Stroke: 10, 20, 30, 40, 50


(Body mounting hole in the figure shows 30 mm Stroke)

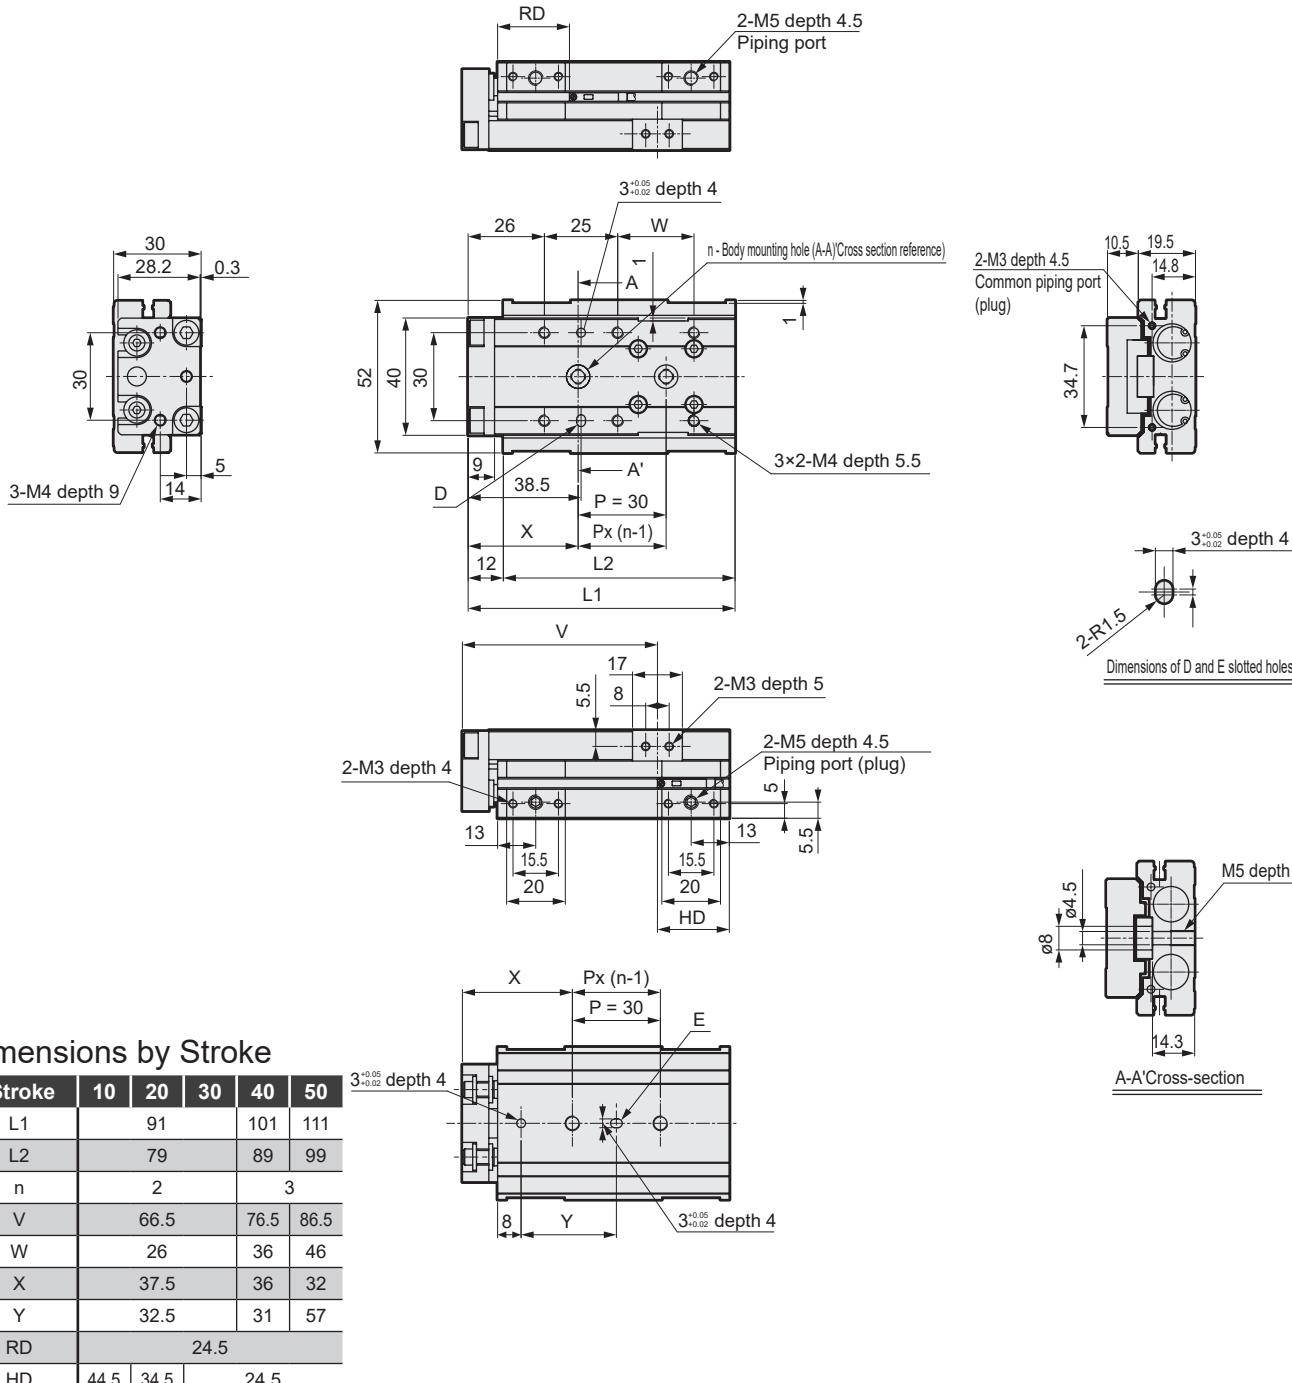

Dimensions by Stroke

	Stroke	10	20	30	40	50
SCPD3	L1		91	101	111	
CMK2	L2	79		89	99	
SCM	n	2		3		
SSD2	V	66.5		76.5	86.5	
MSD	W	26		36	46	
MSDG-L	X	37.5		36	32	
SMG	Y	32.5		31	57	
STG	RD		24.5			
LCG	HD	44.5	34.5		24.5	

● Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

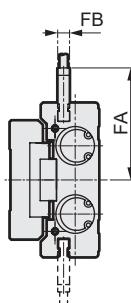

Stroke	10	20	30	40	50
FA			37.8		
FB			4		
RD			23.5		
HD	45.5	35.5		25.5	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common: Piping in Pneumatic Cylinders II (No. CB-030SA).

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

LST

LSTM

Air Booster

ABP2

Compatible with rechargeable batteries

Supports food mfg. processes


Dimensions (bore size: ø12)



● LCR-G-12-HP1


Stroke: 75, 100

(Body mounting hole in the figure shows 75 mm Stroke)

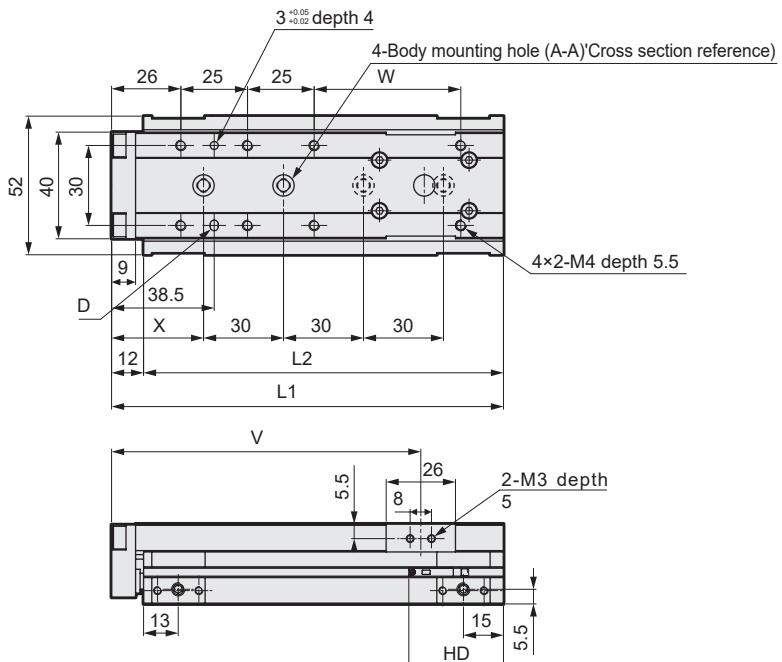


Dimensions by Stroke

Stroke	75	100
L1	147	172
L2	135	160
V	116	141
W	55	80
X	34.5	47
Y	89.5	102
RD	24.5	
HD	35.5	

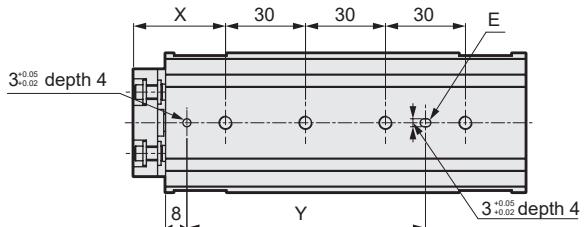

- Dimensions of protruding section when the F2S or F3S cylinder switch is mounted

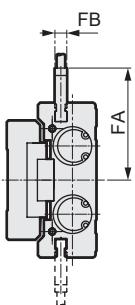

Stroke	75	100
FA	37.8	
FB	4	
RD	23.5	
HD	36.5	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common: Piping in Pneumatic Cylinders II (No. CB-030SA).

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series

Long service life cylinder	SCPD3
	CMK2
	SCM
	SSD2
	MDC2
	MSD
	MSDG-L
	SMG
	LCR
	LCG
	STM
	STG
	STR2
Environment-resistant cylinder	SCPD3
	CMK2
	SCM
	SCG
	SSD2
	SMG
	LCR
	STG
	STS
	STL
Linear Slide Hand	LSH-A
	LSH-G
	LSH-F
	LSHL-A
	LSHL-G
	LSHL-F
	LSHM-A
	LSHM-G
	LSHM-F
Low-profile long stroke hand	LST
Air Booster	LSTM
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
Compatible with rechargeable batteries	
Supports food mtg. processes	





Dimensions (bore size: $\varnothing 16$)




● LCR-G-16-HP1

Stroke: 10, 20, 30, 40, 50

(Body mounting hole in the figure shows 30 mm Stroke)

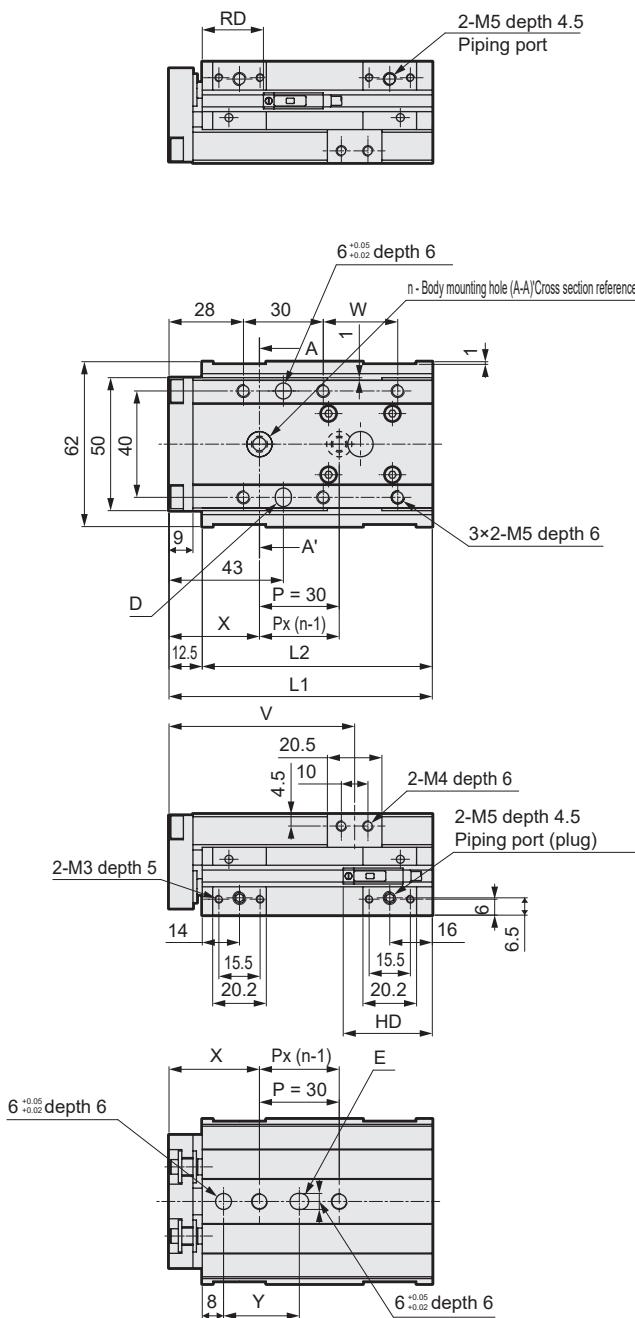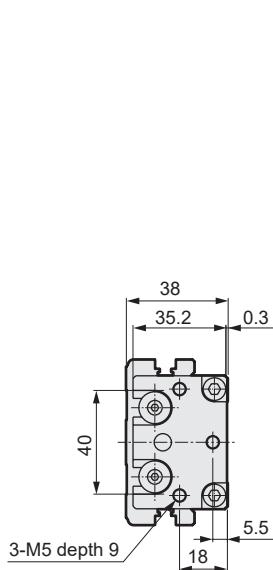

Dimensions of D and E slotted holes

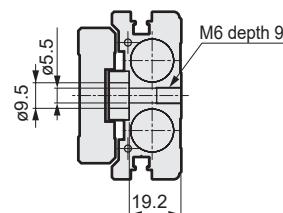

A-A'Cross-section

Dimensions by Stroke

Stroke	10	20	30	40	50
L1		99	109	119	
L2		86.5	96.5	106.5	
n		2		3	
V		69.8	79.8	89.8	
W		28	38	48	
X		34	45.5	35.5	
Y		28.5	40	60	
T0/5*	RD		23		
T2/3*	HD	53.5	43.5	33.5	
SSD2	RD		25.5		
STG	T2/3W*	HD	51	41	31

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common Piping in Pneumatic Cylinders II (No. CB-030SA).


Dimensions (bore size: Ø16)



● LCR-G-16-HP1

Stroke: 75, 100, 125

(Body mounting hole in the figure shows 75 mm Stroke)

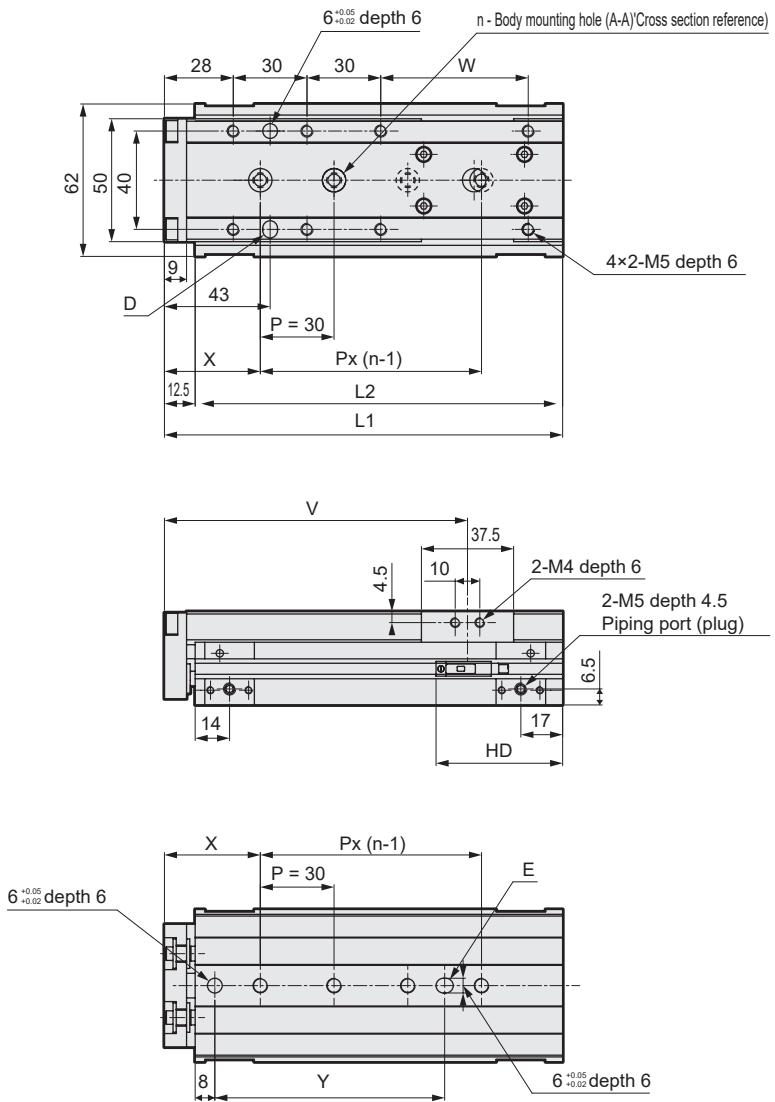

Dimensions by Stroke

Stroke	75	100	125
L1	162	187	212
L2	149.5	174.5	199.5
n	4	5	
V	123.3	148.3	173.3
W	60	85	110
X	39	37	49
Y	93.5	121.5	133.5
T0/5*	RD	23	
T2/3*	HD	51.5	
T2/3W*	RD	25.5	
	HD	49	

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common; Piping in Pneumatic Cylinders II (No. CB-030SA).

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	Environment-resistant cylinder
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Low-profile long stroke hand
LSH-G	
LSH-F	
LSHL-A	Air Booster
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	
LSTM	
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series








Dimensions (bore size: Ø20)



● LCR-G-20-HP1

Stroke: 10, 20, 30, 40, 50

(Body mounting hole in the figure shows 30 mm Stroke)

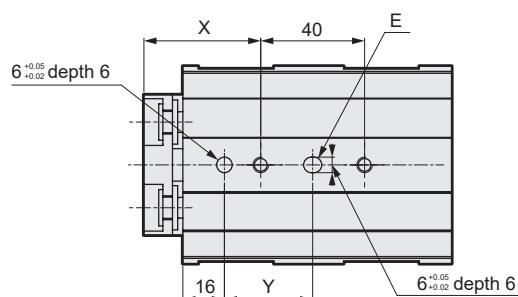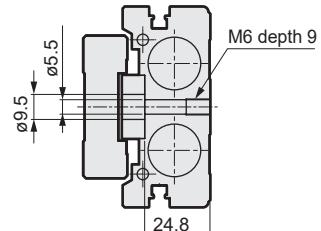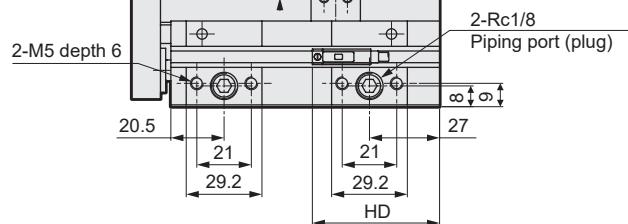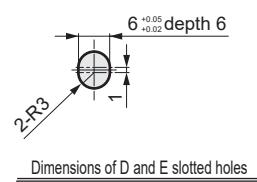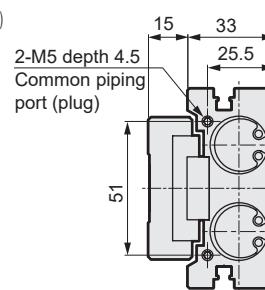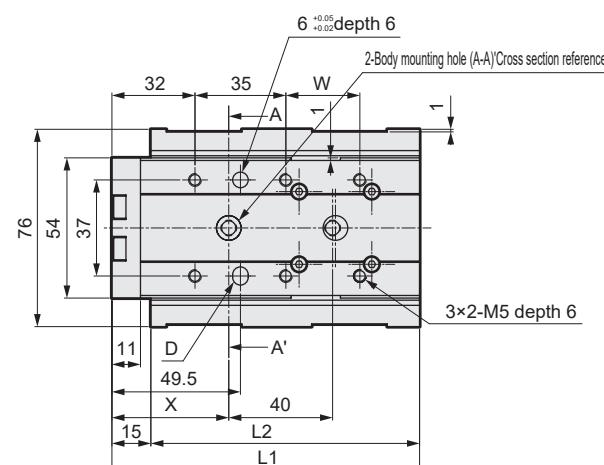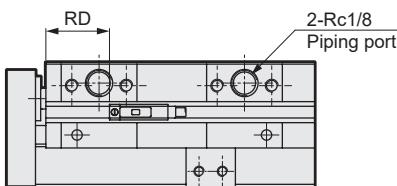

Dimensions by Stroke

	Stroke	10	20	30	40	50
LSH-A	L1					
LSH-G	L1	118.5				
LSH-F	L2	103.5				
LSHL-A	V	78.5				
LSHL-G	W	28.5				
LSHL-F	X	45				
SCPD3	Y	34				
CMK2	T0/5*	RD		24.5		
SCM	T2/3*	HD	69	59		49
SCG						
SSD2	T2/3W*	RD		26		
STG	HD	67	57			47

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS Tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common Piping in Pneumatic Cylinders II (No. CB-030SA).


Dimensions (bore size: Ø20)



● LCR-G-20-HP1

Stroke: 75, 100, 125, 150

(Body mounting hole in the figure shows 75 mm Stroke)

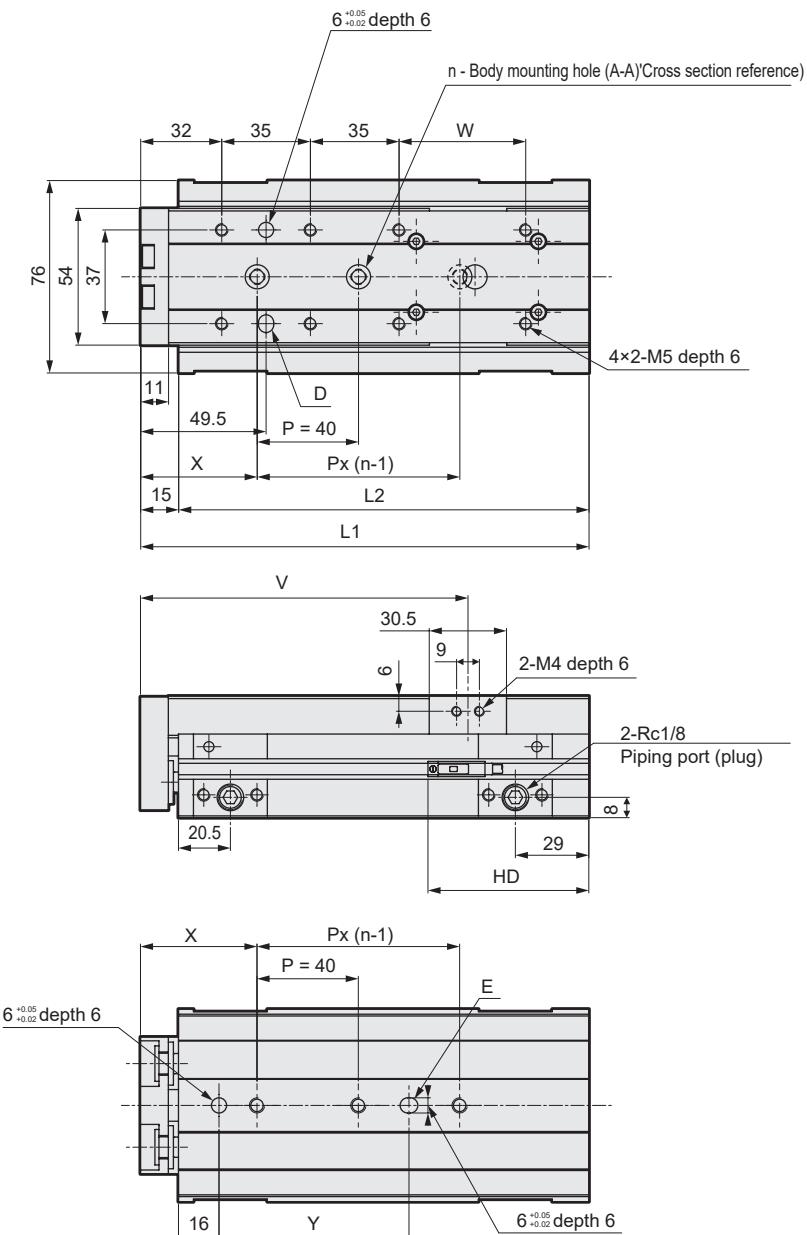

Dimensions by Stroke

Stroke	75	100	125	150
L1	177	202	227	252
L2	162	187	212	237
n	3	4	5	
V	129.3	154.3	179.3	204.3
W	50	75	100	125
X	46	53	51	
Y	75	115	122	160
T0/5*	RD	24.5		
T2/3*	HD	63.5		
T2/3W*	RD	26		
	HD	61.5		

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common; Piping in Pneumatic Cylinders II (No. CB-030SA).

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-G-HP1 Series

Dimensions (bore size: Ø25)



● LCR-G-25-HP1

Stroke: 10, 20, 30, 40, 50

(Body mounting hole in the figure shows 30 mm Stroke)

SCPD3

CMK2

SCM

SSD2

MDC2

MSD

MSDG-L

SMG

LCR

LCG

STM

STG

STR2

SCPD3

CMK2

SCM

SCG

SSD2

SMG

LCR

STG

STS

STL

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

Air
Booster

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM


LCR

LCG

STR2

Dimensions by Stroke

Stroke	10	20	30	40	50
L1		131.5	141.5	151.5	
L2		116.5	126.5	136.5	
n	2	3	2		
V	83.8	93.8	103.8		
W	35.5	45.5	55.5		
X	42.5	45.5	60.5		
Y	39	42	57		
T0/5*	RD		23		
T2/3*	HD	83.5	73.5	63.5	
SSD2	RD		25		
STG	T2/3W*	HD	81.5	71.5	61.5

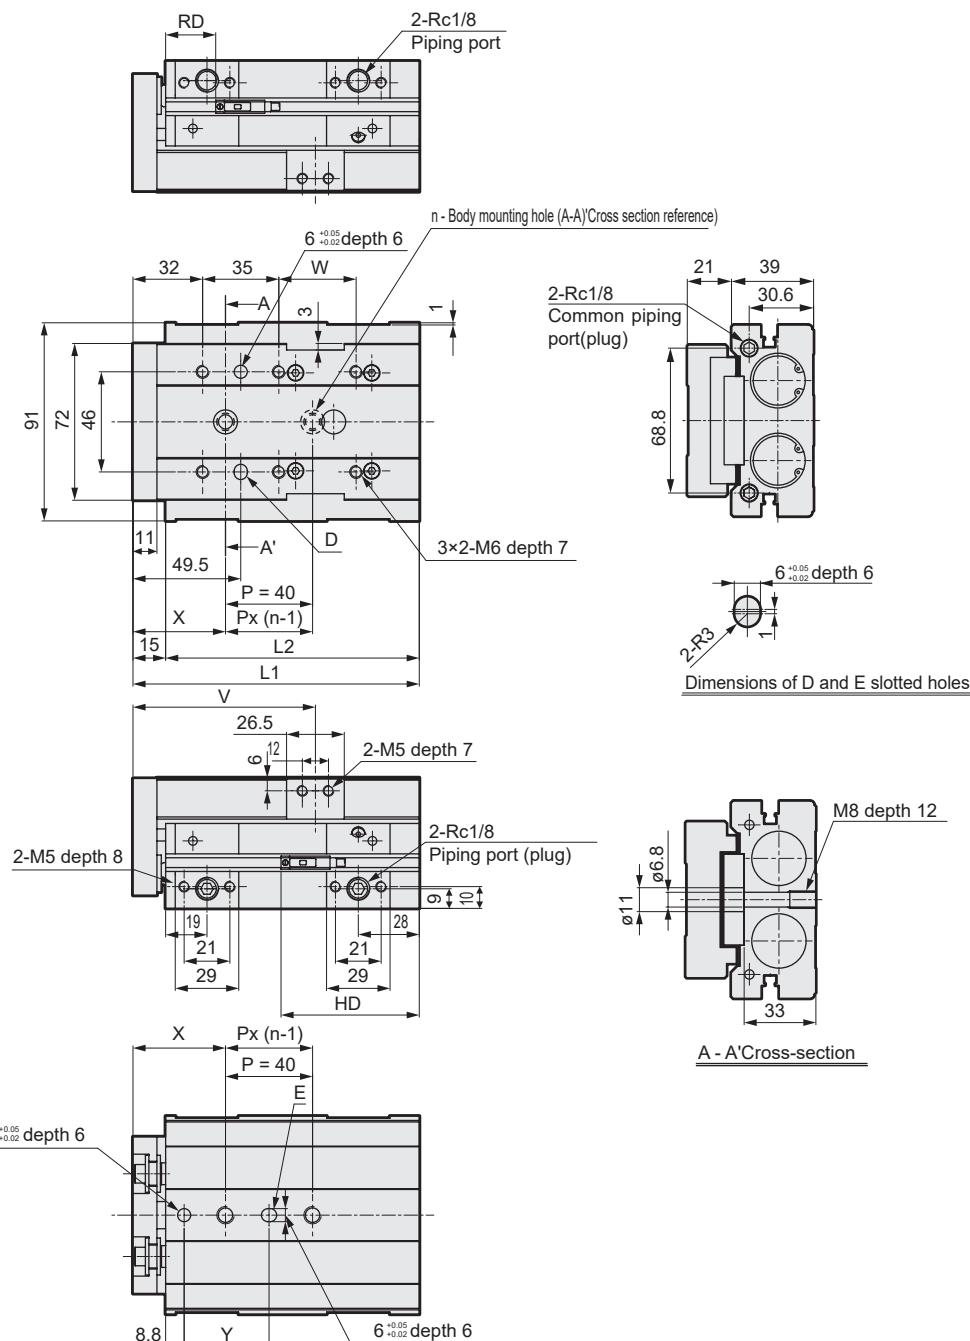

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.

*2: When using rear piping, refer to the cautions of 1. Common Piping in Pneumatic Cylinders II (No. CB-030SA).


Dimensions (bore size: ø25)



● LCR-G-25-HP1

Stroke: 75, 100, 125, 150

(Body mounting hole in the figure shows 75 mm Stroke)

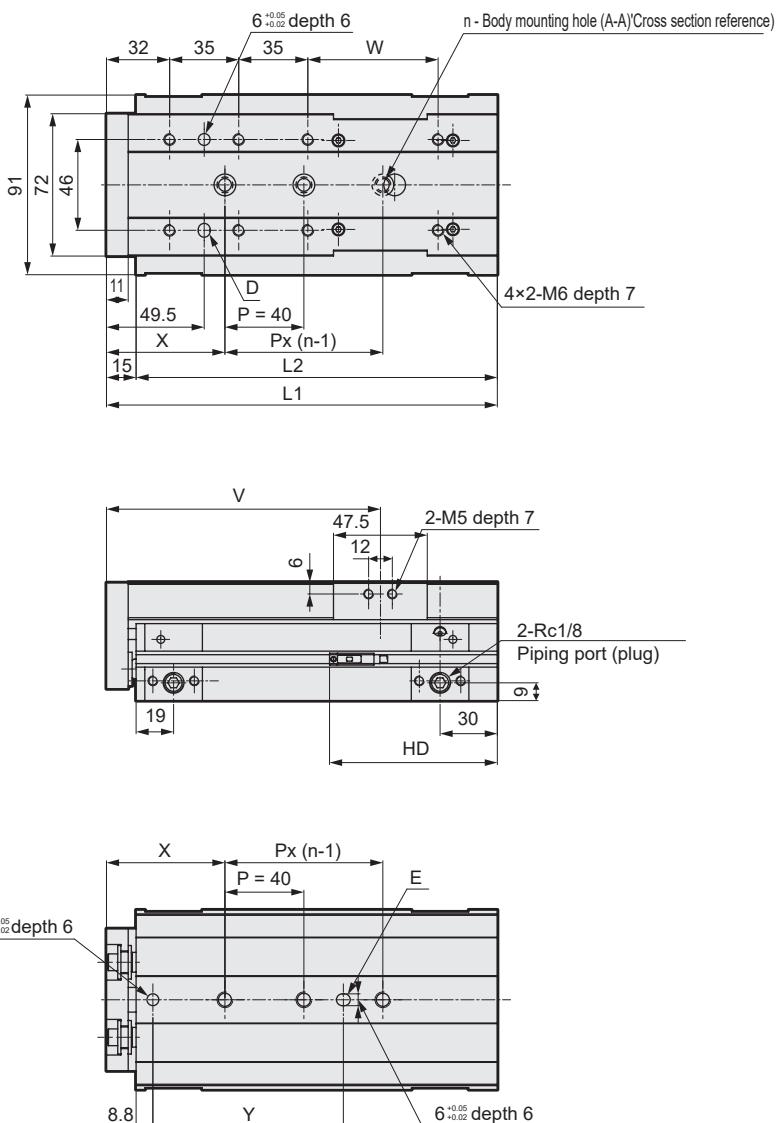

Dimensions by Stroke

Stroke	75	100	125	150
L1	199	224	249	274
L2	184	209	234	259
n	3	4	5	
V	138.8	163.8	188.8	213.8
W	66	91	116	141
X	60	55	45	60
Y	96.5	131.5	161.5	176.5
T0/5*	RD	23		
T2/3*	HD	86		
T2/3W*	RD	25		
	HD	84		

*1: When using the positioning hole, use a pin of dimensions that do not require press fitting. The recommended tolerance of a pin is JIS tolerance m6 or less.


*2: When using rear piping, refer to the cautions of 1. Common; Piping in Pneumatic Cylinders II (No. CB-030SA).

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	


LCR-G-HP1 Series

Dimensions: Option


● Stroke adjusting stopper (S1 to S6)

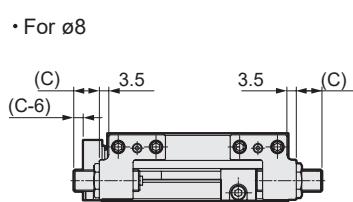


● Shock absorber stopper (A1 to A6)

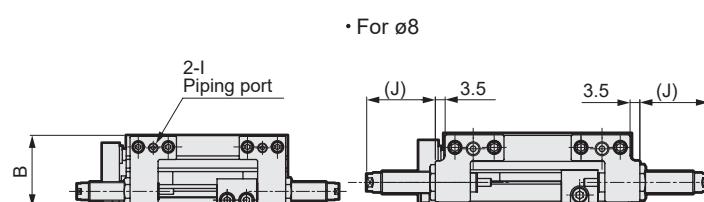

● Two-sided combined double stopper (W1 to W6)

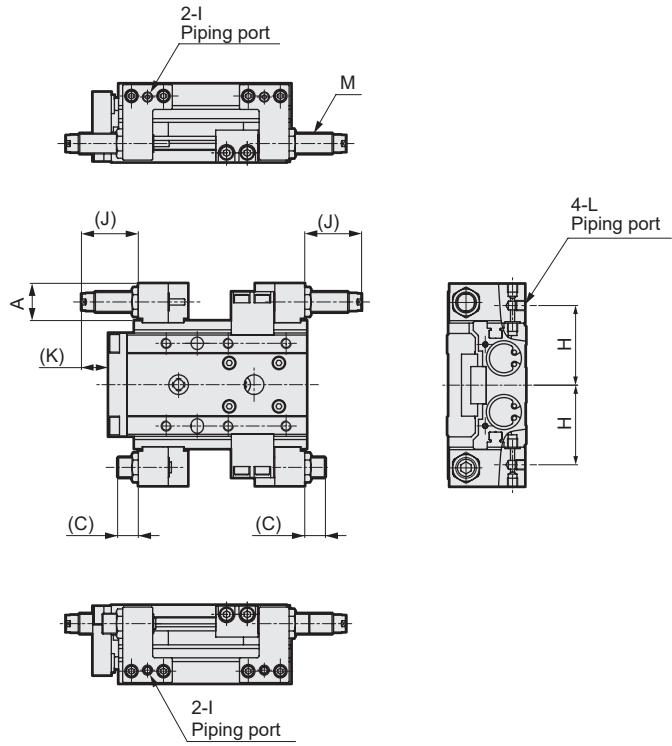


• For ø8

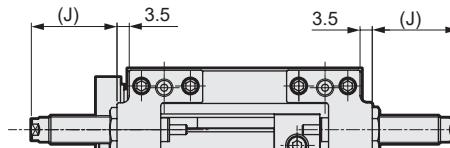

*1: F, G, H, I and L dimensions are only for the types with port on the stopper (S*D*, A*D*W*, W3** to W6**, C*D*).

2: For one side mixed type stopper mix (C), refer to the stroke adjusting stopper (S*) and shock absorber stopper (A*).


3: Dimension C is that of adjustable stroke range 15 mm for two-sided combined double stopper (W).

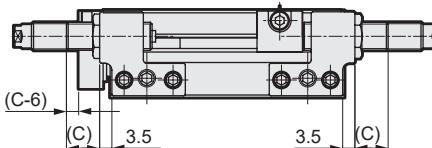

Code	Bore size (mm)	C			D		E		F		G		H	I	J	K	L	M		
		Adjustable stroke range			Short	Long	Short	Long	Short	Long	Short	Long								
		5 mm	15 mm	25 mm																
SCPD3	ø6	14	19.9	11	21	-	14.9	16	1.1	1	24.4	25.5	10.6	10.5	24	M3 depth 3	20.5	9	M3 depth 3	M 8 x 0.75
CMK2	ø8	15.6	24.5	9.5	19.5	-	4.5	12.5	7.5	0.5	15	23	18	11	27.3	M5 depth 4	24.5	15.5	M5 depth 4	M 8 x 0.75
SCM	ø12	15.5	29	12	22	32	1	1	1	3	13	13	13	15	31	M5 depth 4	24.5	12	M5 depth 4	M 8 x 0.75
SCG	ø16	18	37	10	20	30	2	2	4	5	14	14	16	17	38.5	M5 depth 4	27.5	14	M5 depth 4	M 10 x 1
SSD2	ø20	20.5	45.5	14.5	24.5	34.5	4	4	10.5	12.5	20.5	20.5	27	29	47	Rc1/8	27.5	9.5	M5 depth 4	M 12 x 1
STG	ø25	20.5	57	11.5	21.5	31.5	2.5	2.5	11.5	12.5	19	19	28	30	54.5	Rc1/8	24.5	8	M5 depth 4	M 12 x 1

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

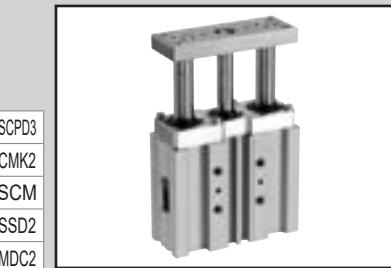

Guided cylinder Double acting/rubber scraper

Environment-resistant cylinder

STG-^M_BG-HP1 Series

● Bore size: ø12/ø16/ø20/ø25/ø32/ø40/ø50/
ø63/ø80/ø100

JISCode



Specifications

Item	STG- ^M _B G-HP1										
LCG	Bore size mm	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
STM	Actuation										
STG	Working fluid										
STR2	Max. working pressure MPa					1.0					
SCPD3	Min. working pressure MPa			0.25				0.2			
CMK2	Proof pressure MPa					1.6					
SCM	Ambient temperature °C					-10 to 60 (no freezing)					
SCG	Port size	M5		Rc1/8		Rc1/4		Rc3/8			
SSD2	Stroke tolerance mm			+2.0		0					
SMG	Working piston speed mm/s			50 to 500				50 to 300			
LCR	Cushion			With rubber cushion							
STG	Lubrication			Not required							
LSH-A	Allowable absorbed energy J	0.056	0.088	0.157	0.157	0.401	0.627	0.980	1.560	2.510	3.920

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch(mm)
ø12	10/20/30/40/50/75/100	250		
ø16	125/150/175/200/250			
ø20	20/30/40/50/75/100/125			
ø25	150/175/200/250/300/350/400			
ø32				
ø40	25/50/75/100	400	5	5(10) *2
ø50	125/150/175			
ø63	200/250/300			
ø80	350/400			
ø100				

*1: The custom Stroke is available in 5 mm increments. However, the total length is the same as that of the next longer standard Stroke.

*2: For types with one or two switches. The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

How to order

Without switch (built-in magnet for switch)

STG - M G - 32 - 25 - HP1

With switch (built-in magnet for switch)

STG - M G - 32 - 25 - T2H - R - HP1

Model No.

A Bearing

B Model No.

C Bore size

F Switch model No.
*1 *2 *3

E Stroke

D Port thread

G Switch quantity

⚠ Precautions for model No. selection

*1: Switches other than F switch model No. are also available. (Made to order) For details, refer to "Pneumatic Cylinders II" (No. CB-030SA).

*2: T8H/V switch cannot be installed on STG-12 or 16.

*3: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

STG-MG-40-50-T0H-H-HP1

Model: Guided cylinder, double acting/Rubber scraper

A Bearing : Metal bush bearing

B Model No. : Rubber scraper

C Bore size : ø40 mm

D Port thread : Rc thread

E Stroke : 50mm

F Switch model No. : Reed T0H switch, lead wire length 1 m

G Switch quantity : 1 on head side

How to order switch

SW - T0V

F Switch model No.

E Stroke

Stroke (mm)	Applicable bore size									
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Standard Stroke	10	●	●							
	20	●	●	●	●					
	25				●	●	●	●	●	●
	30	●	●	●	●					
	40	●	●	●	●					
	50	●	●	●	●	●	●	●	●	●
	75	●	●	●	●	●	●	●	●	●
	100	●	●	●	●	●	●	●	●	●
	125	●	●	●	●	●	●	●	●	●
	150	●	●	●	●	●	●	●	●	●
	175	●	●	●	●	●	●	●	●	●
	200	●	●	●	●	●	●	●	●	●
	250	●	●	●	●	●	●	●	●	●
	300			●	●	●	●	●	●	●
	350			●	●	●	●	●	●	●
	400			●	●	●	●	●	●	●
Min. Stroke *2	5 (10)									
Custom Stroke *1	In 5 mm increments									

*1: The total dimensions are the same as the longer standard stroke.

*2: The value in () is the min. stroke for switches of the 2-color display and AC magnetic field proof.





Code	Description	SCPD3
A Bearing	M Metal bush bearing B Ball bearing	CMK2
B Model No.	G Rubber scraper	SCM
C Bore size (mm)	12 ø12 16 ø16 20 ø20 25 ø25 32 ø32 40 ø40 50 ø50 63 ø63 80 ø80 100 ø100	SSD2
D Port thread	Blank M5 (ø12 to ø16) Rc thread (ø20 to ø100) NN NPT thread (ø20 and over) (made to order) GN G thread (ø20 and over) (made-to-order product)	MDC2
E Stroke (mm)	Refer to the Stroke table below	MSD
F Switch model No.	Lead wire Straight type T0H* T0V* T5H* T5V* T8H* T8V* T1H* T1V* T2H* T2V* T3H* T3V* T2HR3 T2VR3 T3PH* T3PV* T2WH* T2WW* T2YH* T2YY* T3WH* T3WW* T3YH* T3YY* T2YD* - T2YDT* - T2JH* T2JV*	MSDG-L
Proximity	Reed	SMG
		LCR
		LCG
		STR2
		LSH-A
		LSH-G
		LSH-F
		LSHL-A
		LSHL-G
		LSHL-F
		LSHM-A
		LSHM-G
		LSHM-F
		LST
		LSTM
		ABP2
* Lead wire length	Blank 1 m (standard) 3 3 m (option) 5 5 m (option)	SCPD3
G Switch quantity	R 1 on rod side H 1 on head side D 2 T 3	CMK2
Consumable parts list (Note: Specify the kit No. when placing an order.)		
● STG-MG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-MG-12K-HP1	Rod packing
ø16	STG-MG-16K-HP1	Metal gasket
ø20	STG-MG-20K-HP1	Cushion rubber
ø25	STG-MG-25K-HP1	Piston packing
ø32	STG-MG-32K-HP1	Cushion rubber
ø40	STG-MG-40K-HP1	Scrapper (for piston rod)
ø50	STG-MG-50K-HP1	Scrapper (for guide)
ø63	STG-MG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-MG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-MG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80	STG-BG-80K-HP1	Lube keeping structure (for piston rod)
ø100	STG-BG-100K-HP1	
● STG-BG-HP1 (rubber scraper)		
Bore size (mm)	Kit No.	Part name
ø12	STG-BG-12K-HP1	Rod packing
ø16	STG-BG-16K-HP1	Metal gasket
ø20	STG-BG-20K-HP1	Cushion rubber
ø25	STG-BG-25K-HP1	Piston packing
ø32	STG-BG-32K-HP1	Cushion rubber
ø40	STG-BG-40K-HP1	Scrapper (for piston rod)
ø50	STG-BG-50K-HP1	Scrapper (for guide)
ø63	STG-BG-63K-HP1	Lube keeping structure (for guide)
ø80</		

STG-BG-HP1 Series



Dimensions ($\phi 12, \phi 16, \phi 20, \phi 25$)

● STG-BG-12, 16, 20, 25-HP1

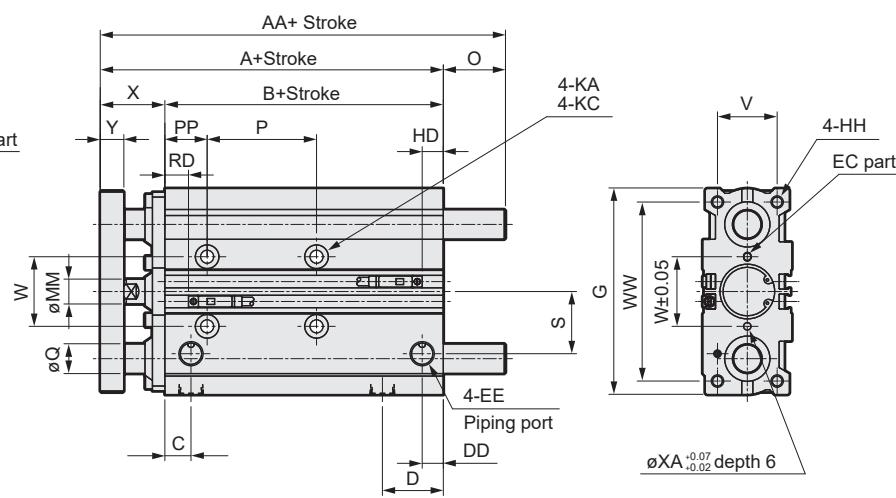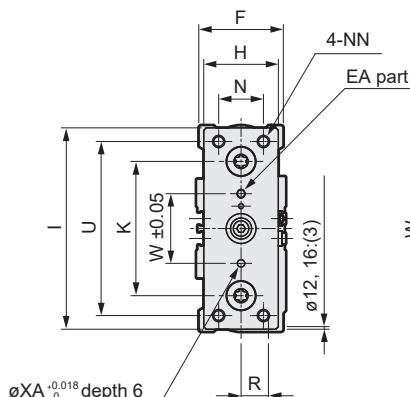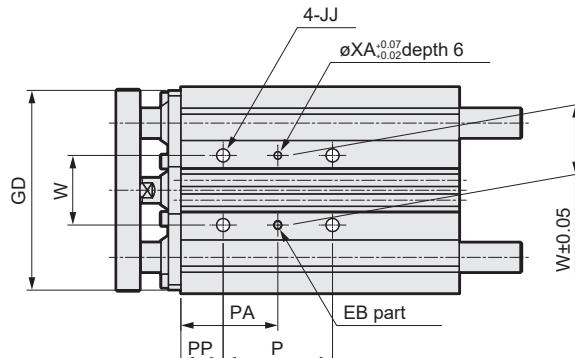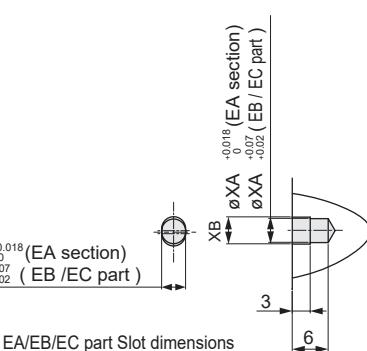

● STG-M/B common

Code	Bore size (mm)	Standard Stroke (mm)					A	B	C	D	DD	EE	F	G	GD	H	HH	I	JJ		
		10,20,30,40,50,75,100	125,150,175,200,250	20,30,40,50,75,100,125,150	175,200,250,300,350,400	57	29	12	16	7	M5	26	58	56	22	M4 depth 10	56	M5 depth 10			
LST	$\phi 12$					61	33	12	18	7.5	M5	30	64	63	25	M5 depth 12	62	M5 depth 10			
LSTM	$\phi 16$					68	37	10.5	24.5	8.5	Rc1/8	36	83	80	30	M5 depth 13	81	M6 depth 12			
	$\phi 20$					68.5	37.5	11.5	25	9	Rc1/8	42	93	93	38	M6 depth 15	91	M6 depth 12			
APP2	$\phi 25$																				
Code	K	KA	MM	N	NN	KC					P					Over 300					
SCPD3	$\phi 12$	41	4.3 through	6	14	M4 through	7.5 spot face depth 4.5				20		40		110	200		-			
CMK2	$\phi 16$	46	4.3 through	8	16	M5 through	8 spot face depth 4.5				24		44		110	200		-			
SCM	$\phi 20$	54	5.2 through	10	18	M5 through	9.5 spot face depth 5.5				24		44		120	200		300			
SSD2	$\phi 25$	64	5.2 through	12	26	M6 through	9.5 spot face depth 5.5				24		44		120	200		300			
Code	PA					30 or less					Over 30 st to 100 st					Over 100 st to 200 st		Over 200 st to 300 st			
MSD	$\phi 12$	30 or less	Over 30 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	PP	R	S	U	V	W	WW	X	Y	T0/T5/T2/T3	T2W/T3W	X	X			
MSDG-L	$\phi 16$	15	25	60	105	-	5	8	17	48	18	23	50	28 _{0.15}	7.5	5	5	7	3	3.5	
SMG	$\phi 16$	17	27	60	105	-	5	10	18	54	22	24	56	28 _{0.15}	7.5	4	10	6	12	3	3.5
STG	$\phi 20$	29	39	77	117	167	17	11	25	70	24	28	72	31	9.5	9.5	8.5	11.5	10.5	3	3.5
STG	$\phi 25$	29	39	77	117	167	17	14	29	78	30	34	82	31	9.5	10	8.5	12	10.5	4	4.5

● STG-M

Code	Bore size (mm)	AA			Q	O			
		50 or less	Over 50 st to 100 st	Over 100 st		50 or less	Over 50 st to 100 st	Over 100 st	
LCR	$\phi 12$	57	70	100	8	0	13	43	
LCG	$\phi 16$	61	78	110	10	0	17	49	
Code	AA					O			
LSH-G	$\phi 20$	68	93	137	12	0	25	69	
LSH-F	$\phi 25$	68.5	99	137	16	0	30.5	68.5	

● STG-B

Code	Bore size (mm)	AA			Q	O			
		30 or less	Over 30 st to 100 st	Over 100 st		30 or less	Over 30 st to 100 st	Over 100 st	
SCPD3	$\phi 12$	58	70	100	6	1	13	43	
CMK2	$\phi 16$	64	80	110	8	3	19	49	
Code	AA					O			
SCM	$\phi 20$	74	93	115	137	10	6	25	47
SCG	$\phi 25$	80	99	118	137	13	11.5	30.5	49.5
SSD2									68.5
STG									






*1: When using a custom stroke, the total dimensions are the same as the longer standard stroke.

*2: For RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches, "Pneumatic Cylinders II (No.CB-030SA)".

Dimensions ($\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$)



● STG-_B^MG-32, 40, 50, 63-HP1

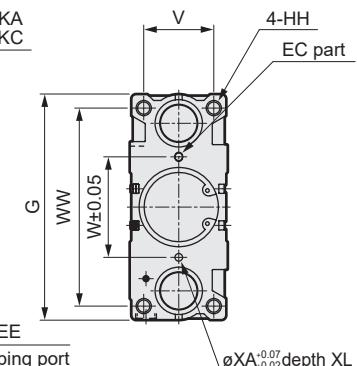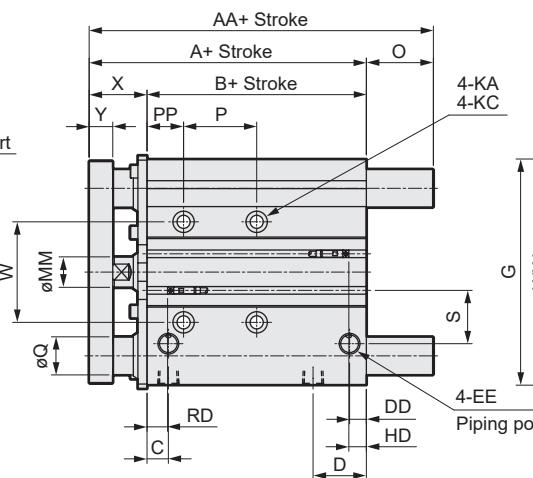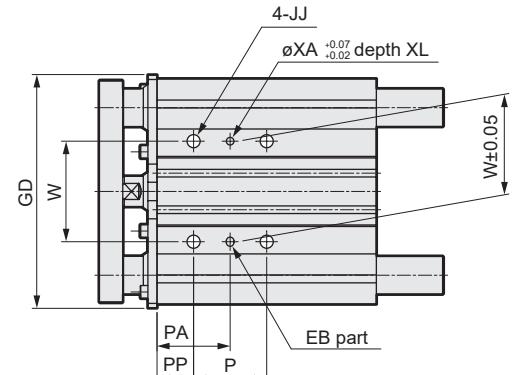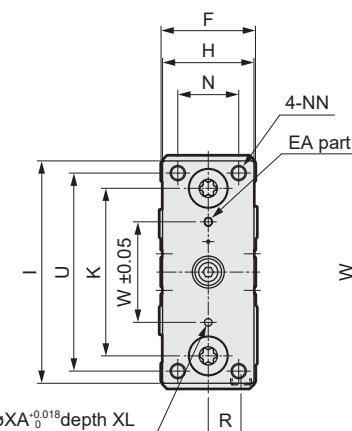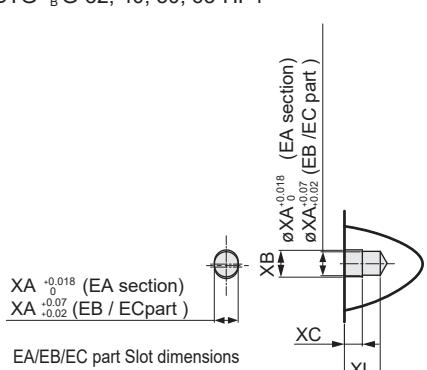

● Common for STG-M/B

Code	Standard Stroke(mm)			A	B	C	D	DD	EE	F	G	H	HH		I	JJ	K	KA						
Bore size (mm)																								
ø32	25,50,75,100,125, 150,175,200,250 , 300,350,400	74.5	37.5	12.5	30.5	9	Rc1/8	48	112	44	M8 depth 20	110	M8 depth 16	78	6.3 through									
ø40		81	44	14	31	10	Rc1/8	54	120	44	M8 depth 20	118	M8 depth 16	86	6.3 through									
ø50		87	44	14	35	11	Rc1/4	64	148	60	M10 depth 22	146	M10 depth 20	110	8.6 through									
ø63		92	49	16.5	35	15	Rc1/4	78	162	70	M10 depth 22	158	M10 depth 20	124	8.6 through									
Code	KC			MM	N	NN	25 or less		Over 25 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st	P		PA									
Bore size (mm)																								
ø32	11 spot face depth 7.5			16	30	M8 through	24		48	124	200	300	33		45									
ø40	11 spot face depth 7.5			16	30	M8 through	24		48	124	200	300	34		46									
ø50	14 spot face depth 9			20	40	M10 through	24		48	124	200	300	36		48									
ø63	14 spot face depth 9			20	50	M10 through	28		52	128	200	300	38		50									
Code	PA						PP		R	S	U	V	W	WW	X	Y	T0/T5/T2/T3		T2W/T3W					
Bore size (mm)	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st														RD	HD	RD	HD	XA	XB	XC	XL
ø32	83	121	171	21	15	34	96	34	42	98	37 ⁰ ₋₂	11.5	10	8.5	12	10.5	4	4.5	3	6				
ø40	84	122	172	22	18	38	104	40	50	106	37 ⁰ ₋₂	11.5	13	12	15	14	4	4.5	3	6				
ø50	86	124	174	24	21.5	47	130	46	66	130	43 ⁰ ₋₂	15.5	13.5	11.5	15.5	13.5	5	6	4	8				
ø63	88	124	174	24	28	55	130	58	80	142	43 ⁰ ₋₂	15.5	14	16	16	18	5	6	4	8				

STG-M

Code Bore size (mm)	AA			Q	GD	O		
	50 or less	Over 50 st to 200 st	Over 200 st			50 or less	Over 50 st to 200 st	Over 200 st
ø32	94	115	155	20	113	19.5	40.5	80.5
ø40	94	115	155	20	121	13	34	74
ø50	106	131	176	25	153	19	44	89
ø63	106	131	176	25	166	14	39	84

*1: When using a custom stroke, the total dimensions are the same as the longer standard stroke.

***2:** Refer to "Pneumatic Cylinders II (No. CB-030S)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

STG-B





Code	AA				Q	GD	O			
	Bore size (mm)	50 or less	Over 50 st to 100 st	Over 100 st to 200 st			50 or less	Over 50 st to 100 st	Over 100 st to 200 st	Over 200 st
ø32	94	113	133	155	16	113	19.5	38.5	58.5	80.5
ø40	94	113	133	155	16	118	13	32	52	74
ø50	106	129	149	176	20	146	19	42	62	89
ø63	106	129	149	176	20	160	14	37	57	84

STG-^M_B-HP1 Series



Dimensions (ø80)

● STG-^M_B-G-80-HP1

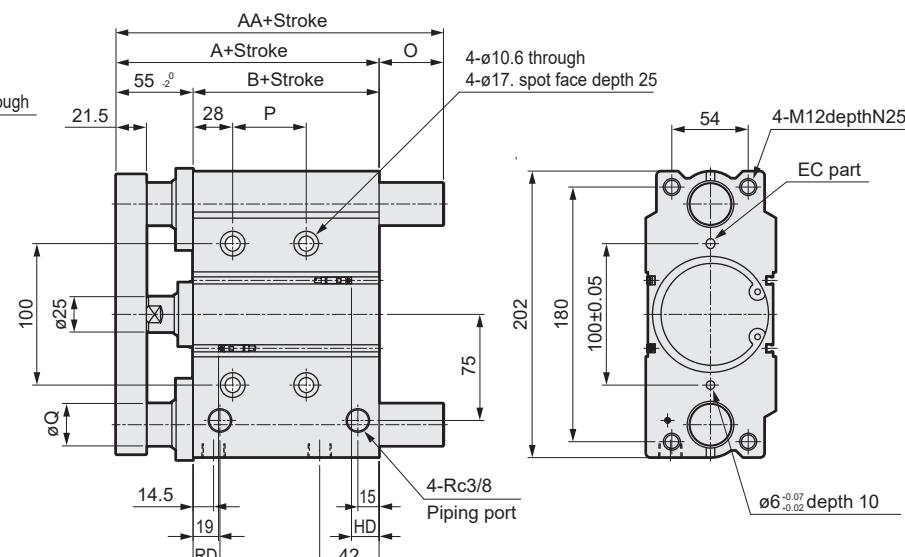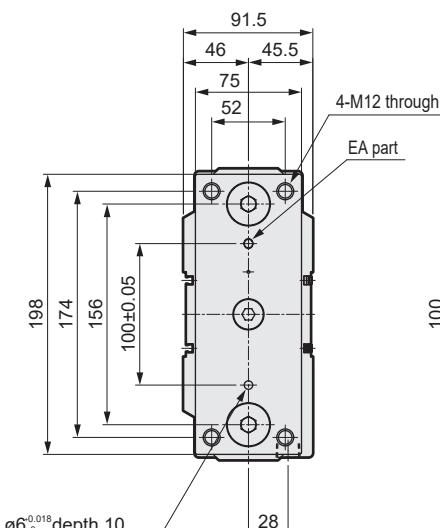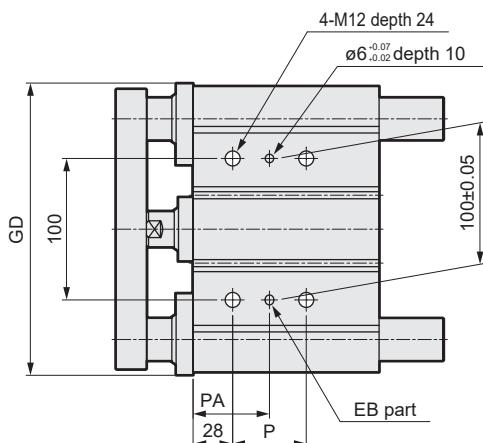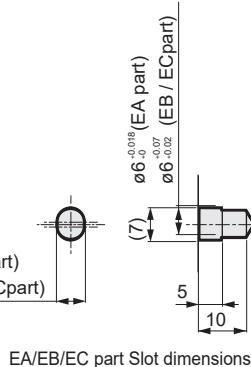

● Common for STG-M/B

SCPD3	Standard Stroke	A	B	GD	P				PA				T0/T5/T2/T3		T2W/T3W			
					25 st or less	Over 25 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st	25 st or less	Over 25 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st	RD	HD	RD	HD
SCM	25,50,75,100,125,150,175,200,250,300,350,400	111.5	56.5	206	28	52	128	200	300	42	54	92	128	178	18	19.5	20	21.5
SSD2																		

● STG-M

STG	AA			Q	O		
	50 st or less	Over 50 st to 200 st	Over 200 st		50 st or less	Over 50 st to 200 st	Over 200 st
STM				30	18.5	45.5	96.5
LCR	130	157	208				
LCG							

● STG-B

LSH-G	AA				Q	O			
	25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st		25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st
LSH-F									
LSHL-A	124.5	145	175	208	25	13	33.5	63.5	96.5
LSHL-G									
LSHL-F									

*1: When using a custom stroke, the total dimensions are the same as the longer standard stroke.

*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand






Air Booster

Compatible with rechargeable batteries

Supports food mfg. processes

Dimensions ($\phi 100$)

● STG-M G-100-HP1

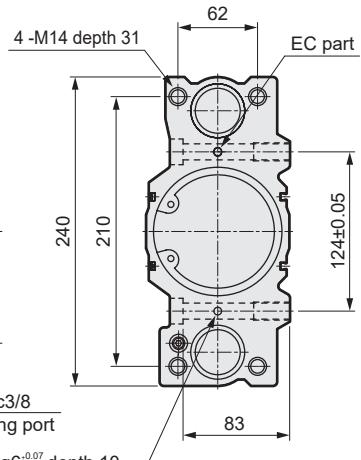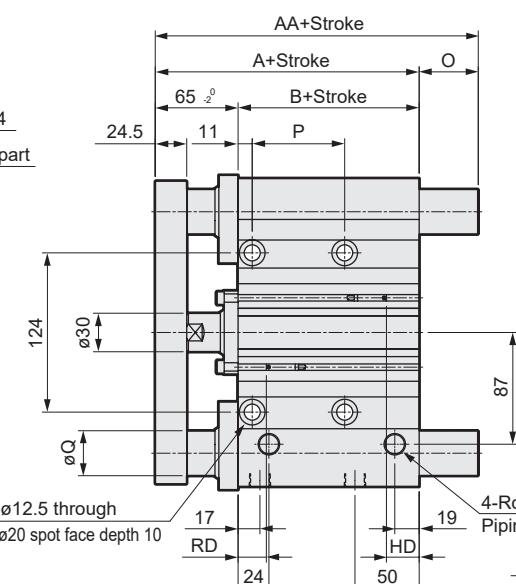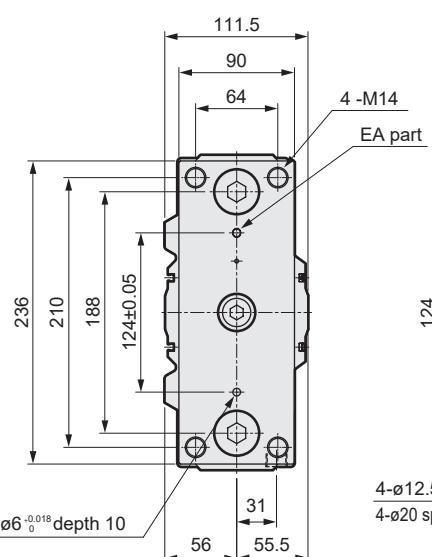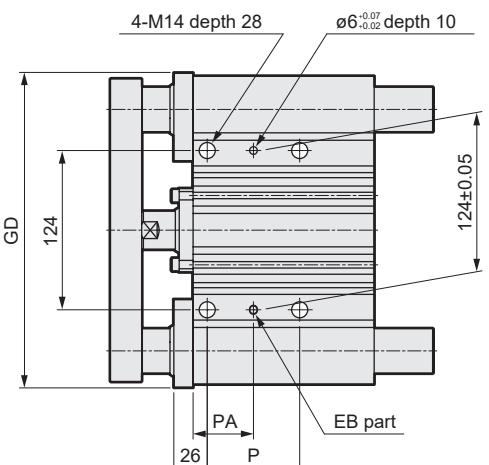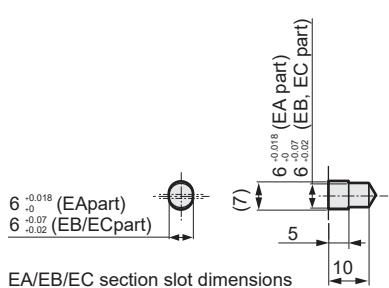

● Common for STG-M/B

Standard Stroke	A	B	P					PA					T0/T5/T2/T3		T2W/T3W	
			25 st or less	Over 25 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st	25 st or less	Over 25 st to 100 st	Over 100 st to 200 st	Over 200 st to 300 st	Over 300 st	RD	HD	RD	HD
25,50,75,100,125,150,175,200, 250,300,350,400	131	66	48	72	148	220	320	35	47	85	121	171	22	25.5	24	27.5

● STG-M

AA			Q	GD	O		
50 st or less	Over 50 st to 200 st	Over 200 st			50 st or less	Over 50 st to 200 st	Over 200 st
152	177	218	35	245	21	46	87

● STG-B

AA				Q	GD	O			
25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st			25 st or less	Over 25 st to 50 st	Over 50 st to 200 st	Over 200 st
136	162	195	218	30	240	5	31	64	87

*1: When using a custom Stroke, the total dimensions are the same as the longer standard Stroke.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	High-profile long stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Guided cylinder Double acting/rubber scraper

Environment-resistant cylinder

STS/STL-^M_BG-HP1 Series

● Bore size: Ø8/Ø12/Ø16/Ø20/Ø25/Ø32/Ø40/
Ø50/Ø63/Ø80/Ø100

JISCode



Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LCR

Linear Slide Hand

LSH-A
LSH-G
LSH-F

Low-profile long stroke hand

LSTM

Air Booster

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Supports food mfg. processes

Specifications

Descriptions		STS- ^M _B G-HP1 STL- ^M _B G-HP1																	
LCG	Bore size mm	Ø8	Ø12	Ø16	Ø20	Ø25	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100							
STM	Actuation	Double acting																	
STG	Working fluid	Compressed air																	
STR2	Max. working pressure MPa	1.0																	
SCPD3	Min. working pressure MPa	0.25				0.2													
CMK2	Proof pressure MPa	1.6																	
SCM	Ambient temperature °C	-10 to 60 (no freezing)																	
SCG	Port size	M5				Rc1/8		Rc1/4		Rc3/8									
SSD2	Stroke tolerance mm	+2.0 0																	
SMG	Usage Piston Speed mm/s	50 to 500						50 to 300											
STG	Cushion	With rubber cushion																	
STS	Lubrication	Not required																	

Stroke

• Short Stroke STS

	Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch (mm)
LSHL-G	Ø8	10,20,30	50	5	With one switch or two switches.
LSHL-F	Ø12				
LSHM-A	Ø16				
LSTM	Ø20	25,50	400	30	With one switch or two switches.
LSTM	Ø25				
LSTM	Ø32				
LSTM	Ø40				
LSTM	Ø50				
LSTM	Ø63				
SCPD3	Ø80	25,50,75,100	100	55	With one switch or two switches.
CMK2	Ø100				

• Long Stroke STL

	Bore size	Standard Stroke(mm)	Max. Stroke(mm)	Min. Stroke(mm)	With switch, min. Stroke(mm)
MSD	Ø8	50,75,100	200	50	50
MSDG-L	Ø12				
SMG	Ø16				
STG	Ø20	50,75,100	400	30	With one switch or two switches.
STM	Ø25				
LCR	Ø32				
LCG	Ø40				
STR2	Ø50				
STR2	Ø63				
LSH-A	Ø80	75,100,125,150,175 200,225,250,275,300 325,350,375,400	200	55	55
LSH-G	Ø100				

Note: The custom Stroke is available in 5 mm increments.

However, the total length is the same as that of the next longer standard.

How to order

● Short Stroke

Without switch (built-in magnet for switch)



With switch (built-in magnet for switch)



● Long stroke

Without switch (built-in magnet for switch)



With switch (built-in magnet for switch)



A Bearing

B Model No.

C Bore size

D Port thread

E Stroke

■ Custom Stroke

Available in 5 mm increments. However, the total length is the same as that of the next longer standard Stroke.

F Switch model No.

*1 *2 *4

⚠ Precautions for model No. selection

*1: Switches other than F switch model No. are also available. (Made to order) For details, refer to "Pneumatic Cylinders II" (No. CB-030SA).

*2: T8HV switch cannot be installed on Ø8 to Ø16.

*3: Ø8 to Ø25 ball bearing B is copper and PTFE free as standard.

*4: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

STS-MG-20-25-T0H-R-F-HP1

Model: Guided cylinder, short Stroke

A Bearing : Metal bush bearing

B Model No. : Rubber scraper

C Bore size : Ø20 mm

D Port thread : M5

E Stroke : 25mm

F Switch model No. : Reed T0H switch, lead wire length 1 m

G Switch quantity : 1 on rod side

H Option : End plate material: steel

Code	Description
A Bearing	
M	Metal bush bearing
B	Ball bearing
B Model No.	
G	Rubber scraper
C Bore size (mm)	
8	Ø8
12	Ø12
16	Ø16
20	Ø20
25	Ø25
32	Ø32
40	Ø40
50	Ø50
63	Ø63
80	Ø80
100	Ø100
D Port thread	
Blank	M5 (Ø8 to Ø25) Rc thread (Ø32 to Ø100)
NN	NPT thread (Ø32 and over) (made to order)
GN	G thread (Ø32 and over) (made to order)
E Stroke (mm)	
Refer to the Stroke table on the following page.	
F Switch model No.	
Lead wire Straight	Lead wire L-shaped
T0H*	T0V*
T5H*	T5V*
T8H*	T8V*
T1H*	T1V*
T2H*	T2V*
T3H*	T3V*
T2HR3	T2VR3
T3PH*	T3PV*
T2WH*	T2WV*
T2YH*	T2YV*
T3WH*	T3WV*
T3YH*	T3YV*
T2YD*	—
T2YDT*	—
T2JH*	T2JV*
Reed	Proximity
1-color display	1-color display (made to order)
No indicator lamp	2-color display
1-color display	3-wire
1-color display bend resistant lead wire	2-wire
1-color display (made to order)	3-wire
2-color display	2-wire
3-wire	2-wire
3-wire	3-wire
2-color display for AC magnetic field	2-wire
1-color display off-delay	2-wire
* Lead wire length	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)
G Switch quantity	
R	1 on rod side
H	1 on head side
D	2
T	3
H Option	
F	End plate material (Steel)
M	Corrosion proof (piston rod, guide rod SUS) (made-to-order product)
M1	Corrosion proof (M+ end plate SUS) (made-to-order product)
P6 *3	Copper and PTFE free specification (made to order)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

STS/STL-^M_{BG}-HP1 Series

E Stroke		Applicable bore size										
Series	Stroke (mm)	ø8	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
STS	10	●	●	●								
	20	●	●	●								
	25				●	●	●		●	●		
	30	●	●	●								
	40	●	●	●								
	50	●	●	●	●	●	●	●	●	●	●	●
	75									●	●	●
	100									●	●	●
	Min. Stroke *1											5
	Custom Stroke *1,*2											In 5 mm increments
STL	50	●	●	●	●	●	●	●	●	●		
	75	●	●	●	●	●	●	●	●	●	●	●
	100	●	●	●	●	●	●	●	●	●	●	●
	125	●	●	●	●	●	●	●	●	●	●	●
	150	●	●	●	●	●	●	●	●	●	●	●
	175	●	●	●	●	●	●	●	●	●	●	●
	200	●	●	●	●	●	●	●	●	●	●	●
	225				●	●	●	●	●	●	●	
	250				●	●	●	●	●	●	●	
	275				●	●	●	●	●	●	●	
LSH	300				●	●	●	●	●	●	●	
	325				●	●	●	●	●	●	●	
	350				●	●	●	●	●	●	●	
	375				●	●	●	●	●	●	●	
	400				●	●	●	●	●	●	●	
	Min. Stroke *1				50							55
	Custom Stroke *1,*2											In 5 mm increments

*1: The total dimensions are the same as the longer standard Stroke.

*2: Special total length for custom Stroke can be provided when a custom Stroke is used. (Made to order)

How to order switch

SW - T0V

Switch model No.
(Page 103 Item F)

Consumable parts list (Note: Specify the kit No. when placing an order.)

● STS-MG-HP1/STL-MG-HP1 (rubber scraper)

Bore size (mm)	Kit No.	Part name
Ø8	STS-MG-8K-HP1	Metal gasket
Ø12	STS-MG-12K-HP1	Rod packing
Ø16	STS-MG-16K-HP1	Cushion rubber
Ø20	STS-MG-20K-HP1	Piston packing
Ø25	STS-MG-25K-HP1	O-ring
Ø32	STS-MG-32K-HP1	Wear ring
Ø40	STS-MG-40K-HP1	Scraper (for piston rod)
Ø50	STS-MG-50K-HP1	Scraper (for guide)
Ø63	STS-MG-63K-HP1	Lube keeping structure (for piston rod)
Ø80	STS-MG-80K-HP1	Lube keeping structure (for guide)
Ø100	STS-MG-100K-HP1	

● STS-BG-HP1/STL-BG-HP1 (rubber scraper)

Bore size (mm)	Kit No.	Part name
Ø8	STS-BG-8K-HP1	Metal gasket
Ø12	STS-BG-12K-HP1	Rod packing
Ø16	STS-BG-16K-HP1	Cushion rubber
Ø20	STS-BG-20K-HP1	Piston packing
Ø25	STS-BG-25K-HP1	O-ring
Ø32	STS-BG-32K-HP1	Wear ring
Ø40	STS-BG-40K-HP1	Scraper (for piston rod)
Ø50	STS-BG-50K-HP1	Scraper (for guide)
Ø63	STS-BG-63K-HP1	Lube keeping structure (for piston rod)
Ø80	STS-BG-80K-HP1	Lube keeping structure (for guide)
Ø100	STS-BG-100K-HP1	

Long service life cylinder
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
LCR
LCG

Environment-resistant cylinder
SCPD3
CMK2
SCM
SSD2
MSG
MSDG-L
SMG
LCR
STG
STS
STL

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHM-A
LSHL-G
LSHM-F

Low-profile long stroke hand
LST
LSTM
ABP2
SCPD3

Air Booster
SCM
SSD2
MSD
MSDG-L



Compatible with rechargeable batteries
SCM
SSD2
MSD
MSDG-L

Supports food mfg. processes
SCPD3
CMK2
SCM
SCG

Dimensions: ø8, ø12, ø16



- Standard single rod STS-BG-HP1
- Corrosion proof STS-BG-M/M1-HP1

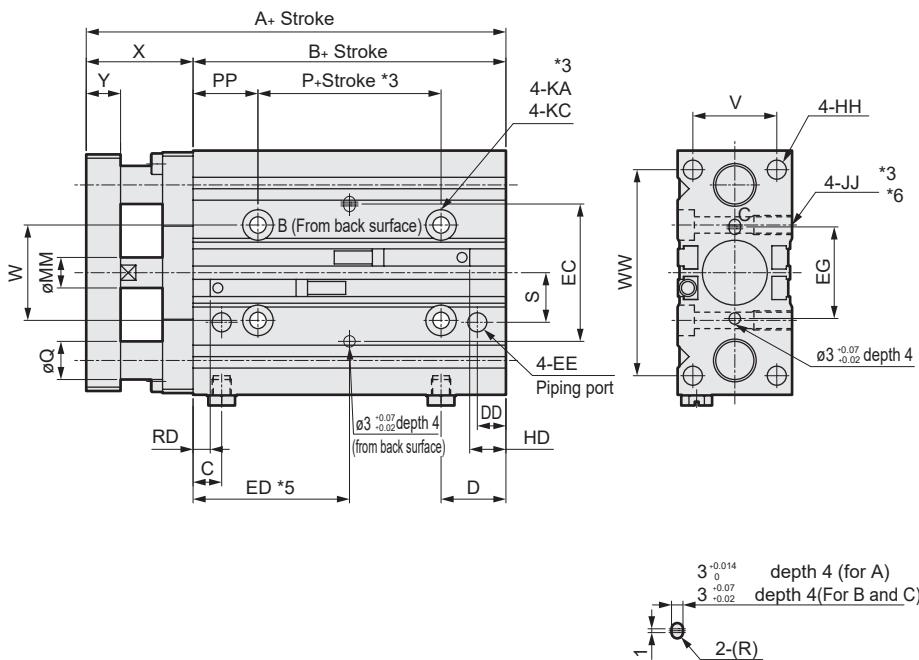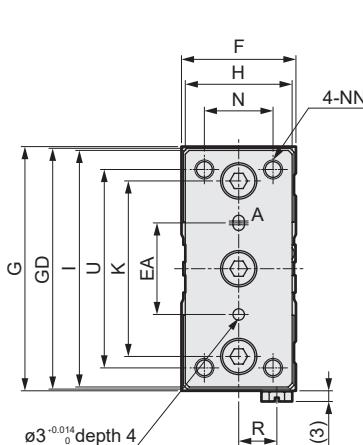

Slot dimensions for A, B and C

Code Bore size(mm)	Standard Stroke (mm)	Dimensions														
		A	B	C	D	DD	EE	EA	EC	ED	EG	F	G	GD	H	HH
ø8	10, 20, 30, 40, 50	55	28	11	14.5	6.5	M5	20	25	15+ ^{Stroke} ₂	20	24	53	51	22	M4 depth 8
ø12		59	32	7.5	14.5	7.5	M5	23	34	16+ ^{Stroke} ₂	20	26	58	56	24	M4 depth 8
ø16		60	32	7.5	17	7.5	M5	24	36	16+ ^{Stroke} ₂	24	30	64	63	28	M5 depth 10
Code Bore size(mm)	I	JJ	K	KA	KC		MM	N	NN		P	PP	Q		R	
ø8	51	M4 depth 10	40	3.3 through	6.5 spot face depth 3.3		4	15	M4 through		-10	20	6	5	7.5	
ø12	56	M4 depth 10	41	3.3 through	6.5 spot face depth 3.3		6	16	M4 through		-2	17	8	6	8	
ø16	62	M5 depth 10	46	4.3 through	8 spot face depth 4.4		8	18	M5 through		-2	17	10	8	10	
Code Bore size(mm)	S	U	V	W	WW	X	Y	T0/T5/T2/T3		T2W/T3W						
ø8	13.5	43	16	25	45	27 ⁰ _{-1.5}	8	6.5	2.5	8.5	4.5					
ø12	12.5	48	17	23	50	27 ⁰ _{-1.5}	8	5	8.5	7	10.5					
ø16	13	52	22	25	54	28 ⁰ _{-1.5}	9	4.5	9.5	6	11.5					

*1: HD and RD dimensions for 10 mm Stroke differ from these dimensions according to the setting.

*2: When using a custom Stroke, the dimensions are the same as the longer standard stroke.

*3: STS-BG-10 (10mm Stroke) is 2-KA, 2-KC, 2-JJ (two mounting holes).

*4: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, and 1H/V switches.

*5: ED is 5 for STS-BG-8-10 (10mm stroke).

*6: STS-BG-16-10 (10mm stroke) has four JJJM5 screws, as shown in the figure, but the mounting will be two.






SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

STS-_B^MG-HP1 Series



Dimensions ($\phi 20$, $\phi 25$)

- Standard single rod STS-_B^MG-HP1
- Corrosion proof STS-_B^MG-M/M1-HP1

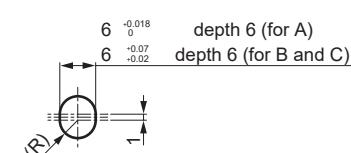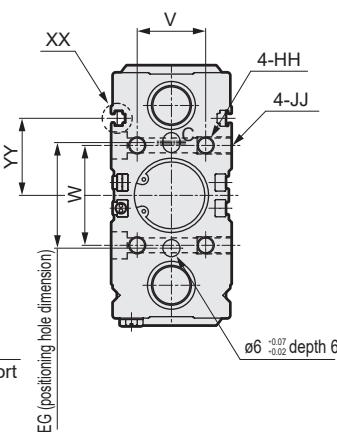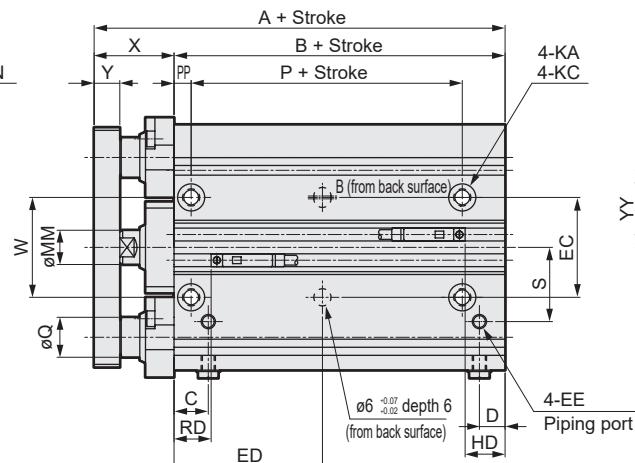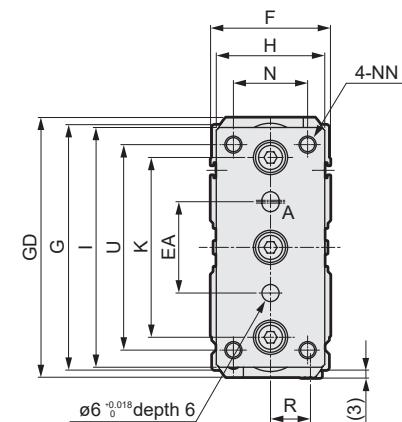

Slot dimensions for A, B and C

XX part details

	Code Bore size(mm)	Standard Stroke(mm)			A	B	C	D	EE	EA	EC	EG	ED		F	G	GD	H	HH	
LST	$\phi 20$	25, 50			68	40	12	8	M5	30	31	33	$14 + \frac{\text{Stroke}}{2}$		38	83	87	36	M6 depth 12	
	$\phi 25$				69	41	12	9	M5	32	35	37	$14.5 + \frac{\text{Stroke}}{2}$		42	86	91	38	M6 depth 12	
LSTM	Code Bore size(mm)	I	JJ	K	KA		KC				MM	N	NN	P	PP	Q		R		
	$\phi 20$	81	M6 depth 12		59	5.2 through		9.5 spot face depth 5.4				10	24	M6 through		20	6	14	12	13
	$\phi 25$	84	M6 depth 12		63	5.2 through		9.5 spot face depth 5.4				12	26	M6 through		20	6	14	12	14
SCPD3	Code Bore size(mm)	S	U	V	W	X	Y	YY	T0/T5/T2/T3		T2W/T3W		RD	HD	RD	HD	STS-M		STS-B	
CMK2	$\phi 20$	24	69	20	31	28 ⁰ ₋₂	9	25	12	9.5	12.5	12.5								
SCM	$\phi 25$	26	72	24	35	28 ⁰ ₋₂	9	27	13	9	14.5	11								

*1: When using a custom Stroke, the dimensions are the same as the longer standard Stroke.

*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V, off-delay, AC magnetic field proof, T1H/V and T8H/V switches).

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries

Supports food mfg. processes

SCPD3

CMK2

SCM

SSD2

MDC2

MSD

MSDG-L

SMG

LCR

LCG

STM

STG

STR2

SCPD3

CMK2

SCM

SCG

SSD2

SMG

LCR

STG

Dimensions ($\phi 20$, $\phi 25$)




● Standard single rod STS-_B^MG-HP1

● Corrosion proof STS-_B^MG-M/M1-HP1

Dimensions ($\phi 32$, $\phi 40$, $\phi 50$, $\phi 63$)

- Standard single rod STS-B G-HP1
- Corrosion proof STS-B G-M/M1-HP1

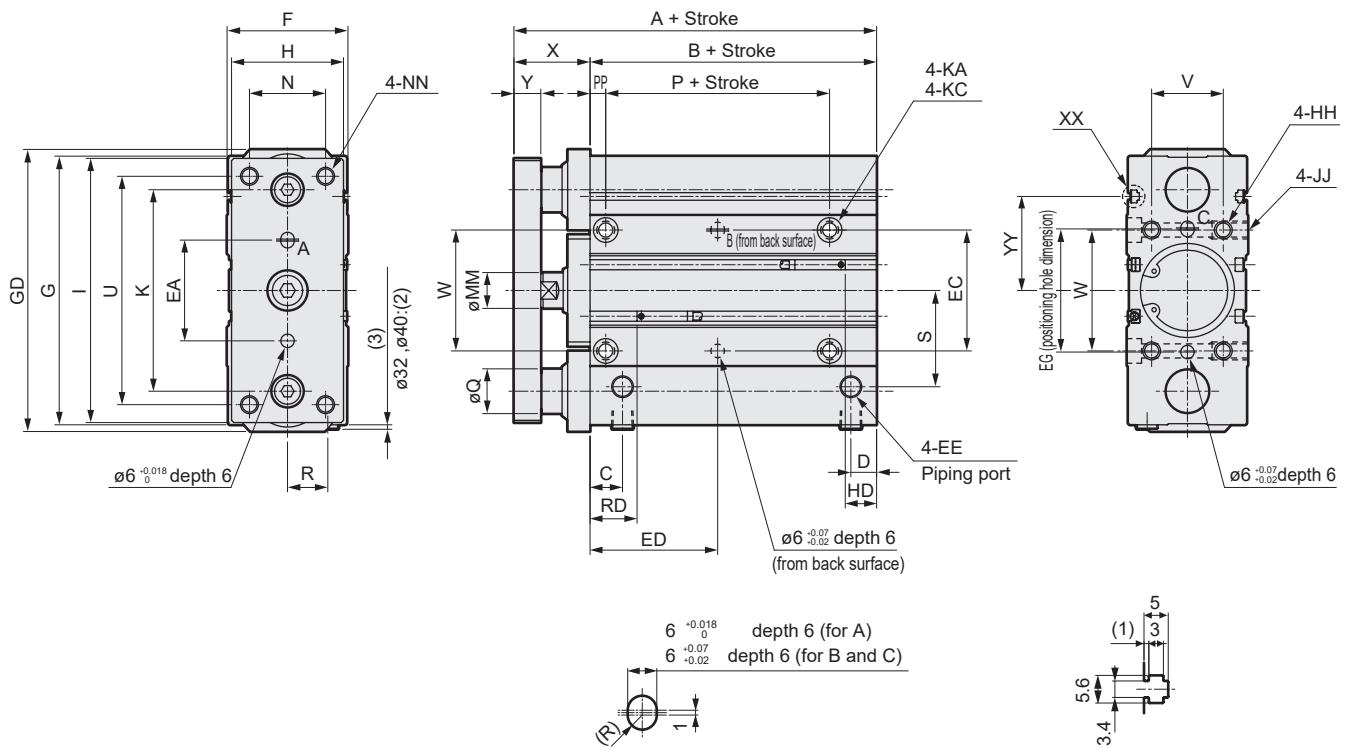

Code Bore size (mm)	Standard Stroke(mm)		A	B	C	D	EE	EA	EC	EG	ED	F	G	GD	H	HH
ø32	25, 50		83	49	14	10.5	Rc1/8	42	45	46	17.5+ Stroke 2	47	111	117	45	M8 depth 16
ø40			87	53	14.5	12	Rc1/8	45	54	55	19.5+ Stroke 2	54	120	126	50	M8 depth 16
ø50			92	55	16	12.5	Rc1/4	55	66	69	19.5+ Stroke 2	66	147	152	64	M10 depth 20
ø63			98	61	17.5	17.5	Rc1/4	62	79	82	22.5+ Stroke 2	79	162	166	75	M10 depth 20
Code Bore size (mm)	I	JJ	K	KA		KC			MM	N	NN	P	PP	Q		R
ø32	109	M8 depth 16	81	6.3 through		11 spot face depth 6.5			16	29	M8 through	22	7	20	16	16
ø40	118	M8 depth 16	90	6.3 through		11 spot face depth 6.5			16	34	M8 through	25	7	20	16	18
ø50	145	M10 depth 20	110	8.6 through		14 spot face depth 8.6			20	44	M10 through	26	8	25	20	22
ø63	160	M10 depth 20	124	8.6 through		14 spot face depth 8.6			20	55	M10 through	26	8	25	20	26
Code Bore size (mm)	S	U	V	W	X	Y	YY	T0/T5/T2/T3		T2W/T3W						
ø32	39	93	25	45	34 _{-0.2}	12	39	17.5	13.5	19	15					
ø40	43	102	32	54	34 _{-0.2}	12	42	21	14	22.5	16					
ø50	49	125	38	66	37 _{-0.2}	16	45	22	16	23.5	16.5					
ø63	56	140	50	79	37 _{-0.2}	16	52	20	23	21.5	24.5					

*1: When using a custom Stroke, the dimensions are the same as the longer standard Stroke.

*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
LCG	
STM	
STG	
STS	Linear Slide Hand
STL	
LSH-A	Low-profile long stroke hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

STS-_B^MG-HP1 Series

Dimensions ($\varnothing 80$)



- Standard single rod STS-_B^MG-HP1
- Corrosion proof STS-_B^MG-M1-HP1

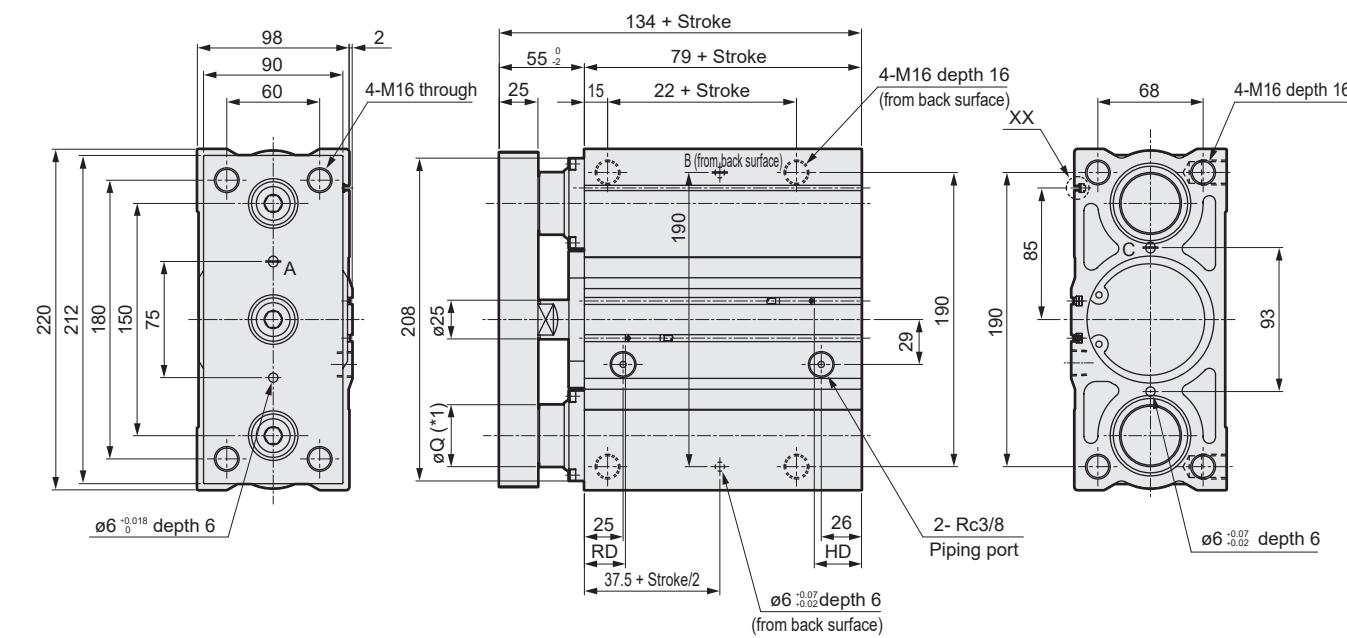

STS

STL

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

Air

Booster


ABP2

	Code	T0/T5/T2/T3		T2W/T3W	
	Bore size(mm)	RD	HD	RD	HD
SCPD3	Ø80	26.5	30.5	28	35.5
CMK2					
SCM					
SSD2					
MSD					
MSDG-L					
SMG					
LCR					
LCG					
STM					
STG					
STR2					
SCPD3					
CMK2					
SCM					
SCG					
SSD2					
SMG					
LCR					
STG					
STS					
STL					


*1: Dimension of Q is Ø40 for M (metal bush bearing) and Ø35 for B (ball bearing).

*2: When using a custom Stroke, the dimensions are the same as the longer standard Stroke. The Ø 80 standard Stroke is available in four types of 25, 50, 75, 100mm.

*3: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

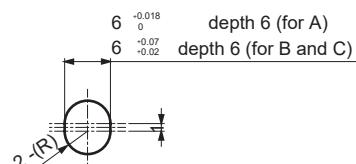

Slot dimensions for A, B and C



XX part details

Compatible with rechargeable batteries

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G


LSHM-F

LSH-A

Dimensions ($\phi 100$)



- Standard single rod STS-B G-HP1
- Corrosion proof STS-B G-M/M1-HP1
- Copper and PTFE free STS-B G-P6-HP1

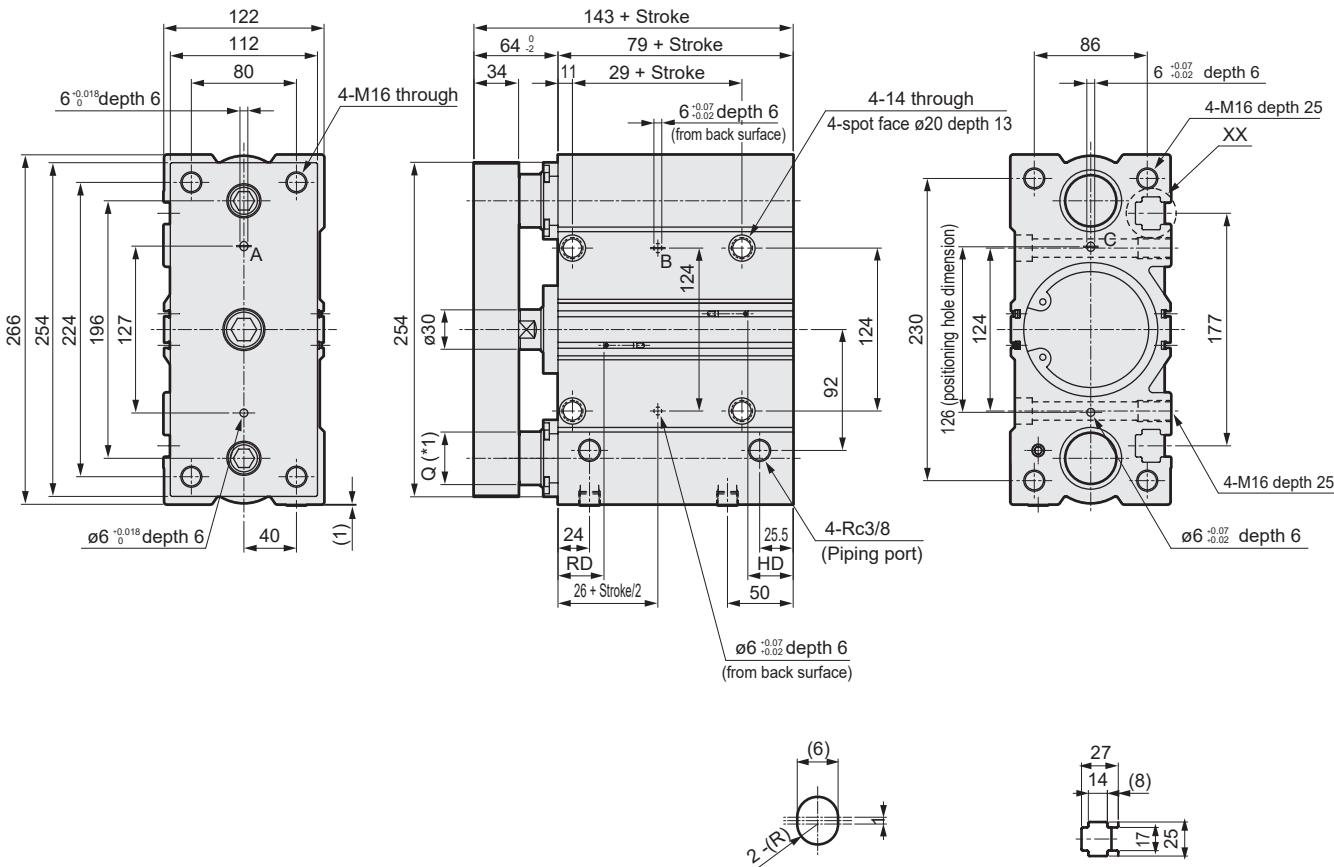


Code	T0/T5/T2/T3		T2W/T3W	
	RD	HD	RD	HD
Ø100	24	34.5	27	37


*1: Dimension of Q is Ø40 for M (metal bush bearing) and Ø35 for B (ball bearing).

*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

Slot dimensions for A, B and C



XX part details





SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

STL-^M_BG-HP1 Series


Dimensions: ø8, ø12, ø16



- Standard single rod STL-^M_BG-HP1
- Corrosion proof STL-^M_BG-M/M1-HP1

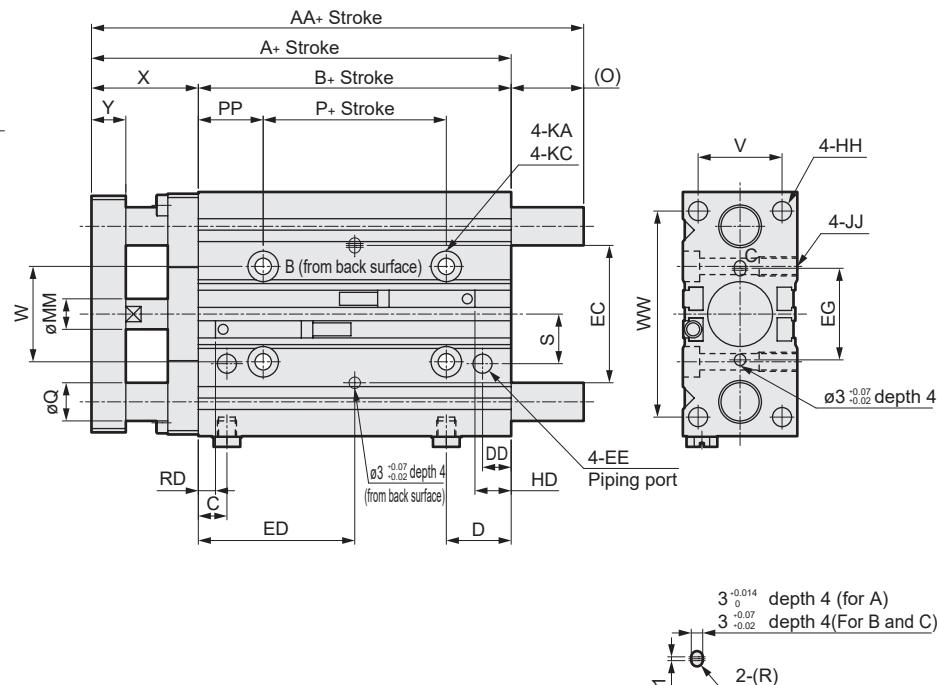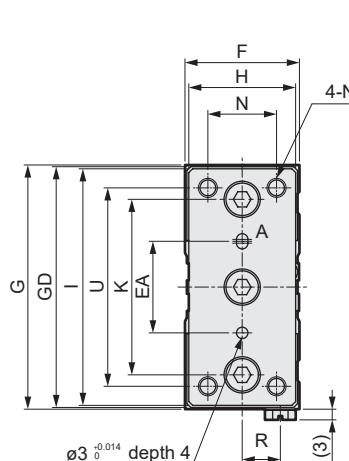

Slot dimensions for A, B and C



	Code Bore size(mm)	Standard Stroke (mm)		A	AA	B	C	D	DD	EE	EA	EC	ED	EG	F	G	GD	H	HH	
LST	ø8	50,75,100		55	61	28	11	14.5	6.5	M5	20	25	15+ Stroke 2	20	24	53	51	22	M4 depth 8	
LSTM	ø12	125,150		59	68.5	32	7.5	14.5	7.5	M5	23	34	16+ Stroke 2	20	26	58	56	24	M4 depth 8	
LSTM	ø16	175,200		60	79	32	7.5	17	7.5	M5	24	36	16+ Stroke 2	24	30	64	63	28	M5 depth 10	
ABP2	Code Bore size(mm)	I	JJ	K	KA		KC			MM	N	NN		O	P	PP	Q		R	
SCPD3	ø8	51	M4 depth 10	40	3.3 through		6.5 spot face depth 3.3			4	15	M4 through		6	-10	20	6	5	7.5	
CMK2	ø12	56	M4 depth 10	41	3.3 through		6.5 spot face depth 3.3			6	16	M4 through		9.5	-2	17	8	6	8	
SCM	ø16	62	M5 depth 10	46	4.3 through		8 spot face depth 4.4			8	18	M5 through		19	-2	17	10	8	10	
MSD	Code Bore size (mm)	S	U	V	W	WW	X	Y	T0/T5/T2/T3		T2W/T3W		RD		HD		RD		HD	
MSDG-L	ø8	13.5	43	16	25	45	27 ⁰ _{-1.5}	8	6.5	2.5	8.5	4.5								
SMG	ø12	12.5	48	17	23	50	27 ⁰ _{-1.5}	8	5	8.5	7	10.5								
STG	ø16	13	52	22	25	54	28 ⁰ _{-1.5}	9	4.5	9.5	6	11.5								
STM																				

*1: When using a custom Stroke, the dimensions are the same as the longer standard Stroke.

*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof and T1H/V switches.

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster


Compatible with rechargeable batteries

Supports food mtg. processes

Dimensions ($\varnothing 20$, $\varnothing 25$)



- Standard single rod STL-_B^M G-HP1
 - Corrosion proof STL-_B^M G-M/M1-HP1

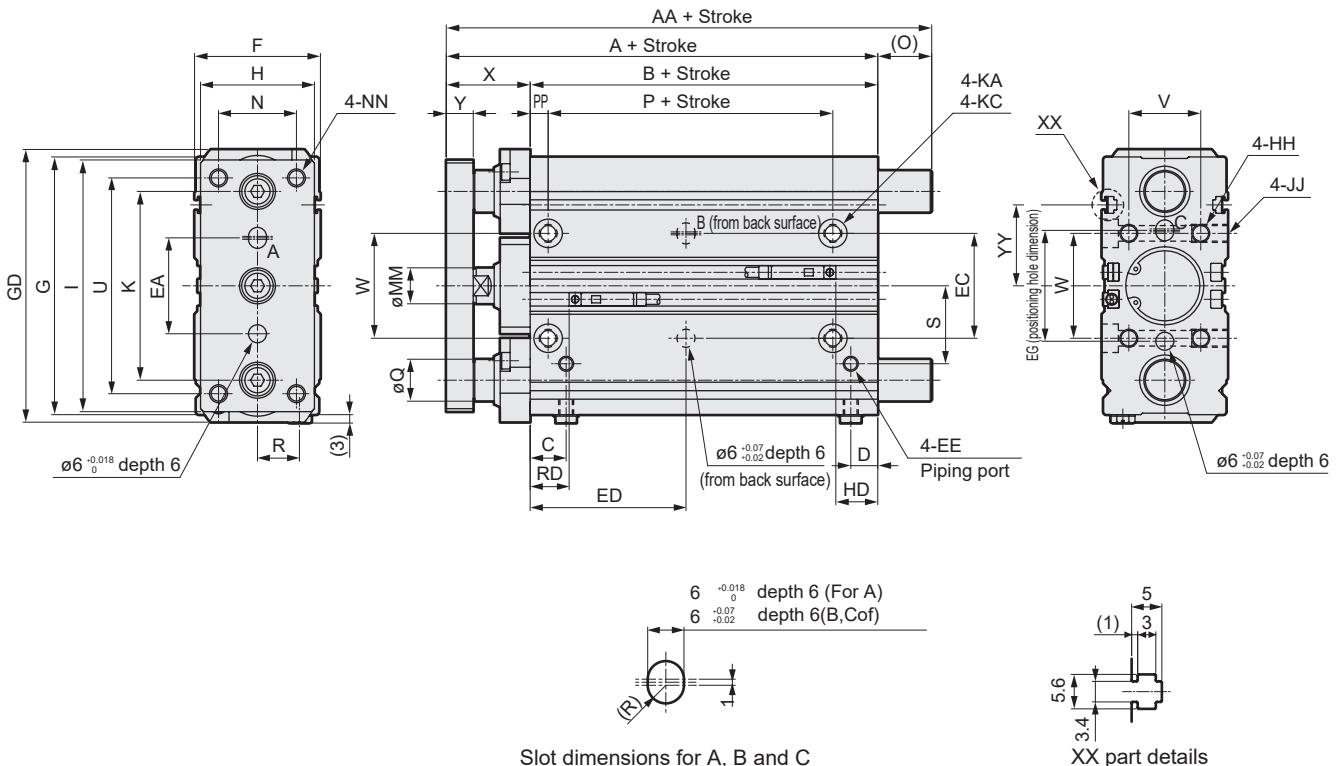

*1: When using a custom Stroke, the dimensions are the same as the longer standard Stroke.

*2 : Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

STL-^M_BG-HP1 Series

Dimensions ($\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$)



- Standard single rod STL-^M_BG-HP1
- Corrosion proof STL-^M_BG-M1-HP1

Long service life cylinder


Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Compatible with rechargeable batteries

Supports food mfg. processes

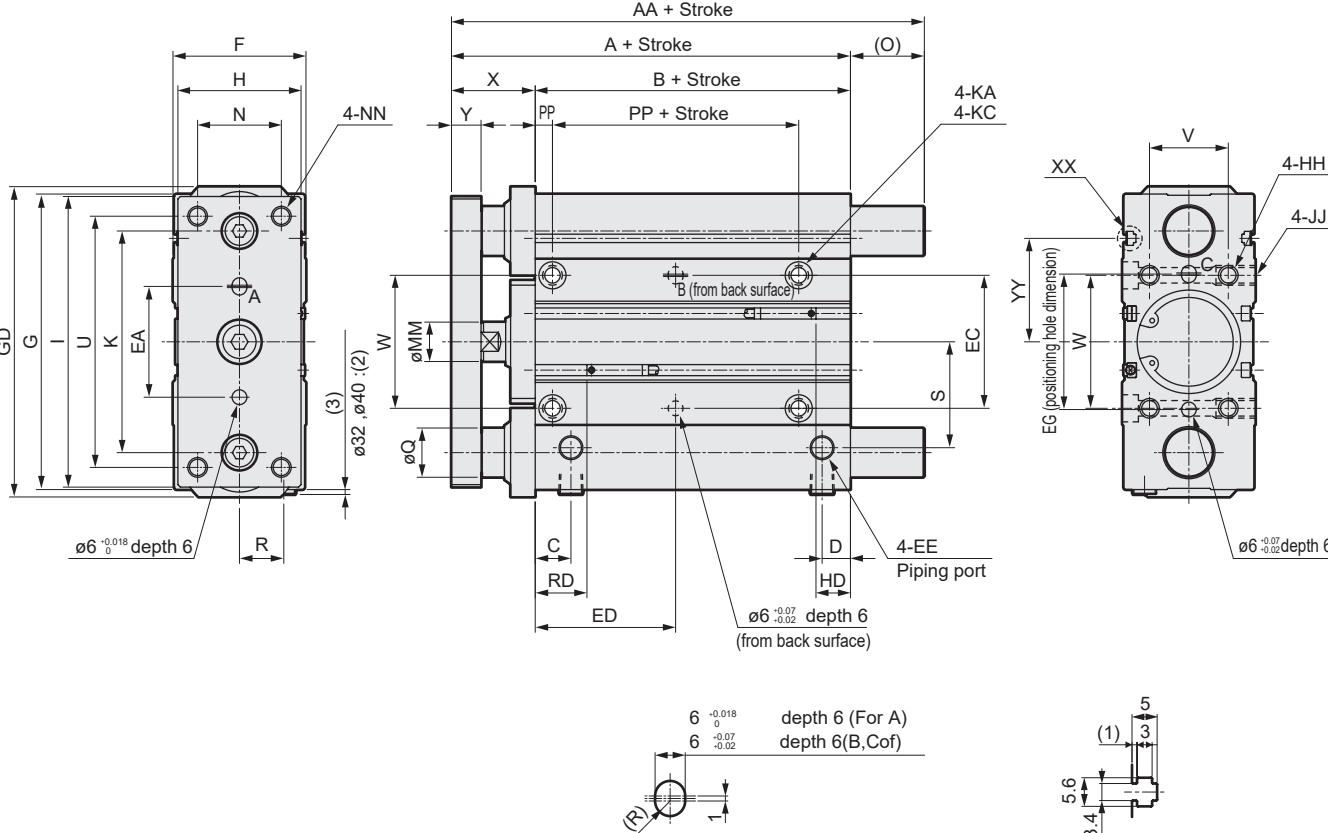

Slot dimensions for A, B and C

XX part details

Code	Bore size(mm)	Standard Stroke(mm)		A	AA	B	C	D	EE	EA	EC	EG	ED	F	G	GD	H	HH	
		Ø32	Ø40	83	117	49	14	10.5	Rc1/8	42	45	46	17.5+	Stroke 2	47	111	117	45	M8 depth 16
ABP2	Ø32	50, 75, 100, 125, 150,		87	117	53	14.5	12	Rc1/8	45	54	55	19.5+	Stroke 2	54	120	126	50	M8 depth 16
SCPD3	Ø40	175, 200, 225, 250, 275,		92	140	55	16	12.5	Rc1/4	55	66	69	19.5+	Stroke 2	66	147	152	64	M10 depth 20
CMK2	Ø50	300, 325, 350, 375, 400		98	140	61	17.5	17.5	Rc1/4	62	79	82	22.5+	Stroke 2	79	162	166	75	M10 depth 20
SCM	Ø63																		

Code	Bore size(mm)	I	JJ	K	KA	KC	MM	N	NN	O	P	PP	Q	STL-M	STL-B	R	S	U	V	W
		Ø32	109	M8 depth 16	81	6.3 through 11 spot face depth 6.5	16	29	M8 through	34	22	7	20	16	16	39	93	25	45	
MSD	Ø40	118	M8 depth 16	90	6.3 through 11 spot face depth 6.5	16	34	M8 through	30	25	7	20	16	18	43	102	32	54		
SSD2	Ø50	145	M10 depth 20	110	8.6 through 14 spot face depth 8.6	20	44	M10 through	48	26	8	25	20	22	49	125	38	66		
SCM	Ø63	160	M10 depth 20	124	8.6 through 14 spot face depth 8.6	20	55	M10 through	42	26	8	25	20	26	56	140	50	79		

Code	Bore size(mm)	X	Y	YY	T0/T5/T2/T3	T2W/T3W	RD	HD	RD	HD	
		Ø32	34 ⁰ ₋₂	12	39	17.5	13.5	19	15		
LCG	Ø40	34 ⁰ ₋₂	12	42	21	14	22.5	16			
STR2	Ø50	37 ⁰ ₋₂	16	45	22	16	23.5	16.5			
LSH-A	Ø63	37 ⁰ ₋₂	16	52	20	23	21.5	24.5			
LSH-G											
LSH-F											

*1: All dimensions not shown are the same as those of the standard. When using a custom Stroke, the dimensions are the same as the longer standard Stroke.


*2: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.

SCPD3
CMK2
SCM
SCG
SSD2
STG

Dimensions (ø80)



- Standard single rod STL- $\frac{M}{B}$ G-HP1
 - Corrosion proof STL- $\frac{M}{B}$ G-M/M1-HP1

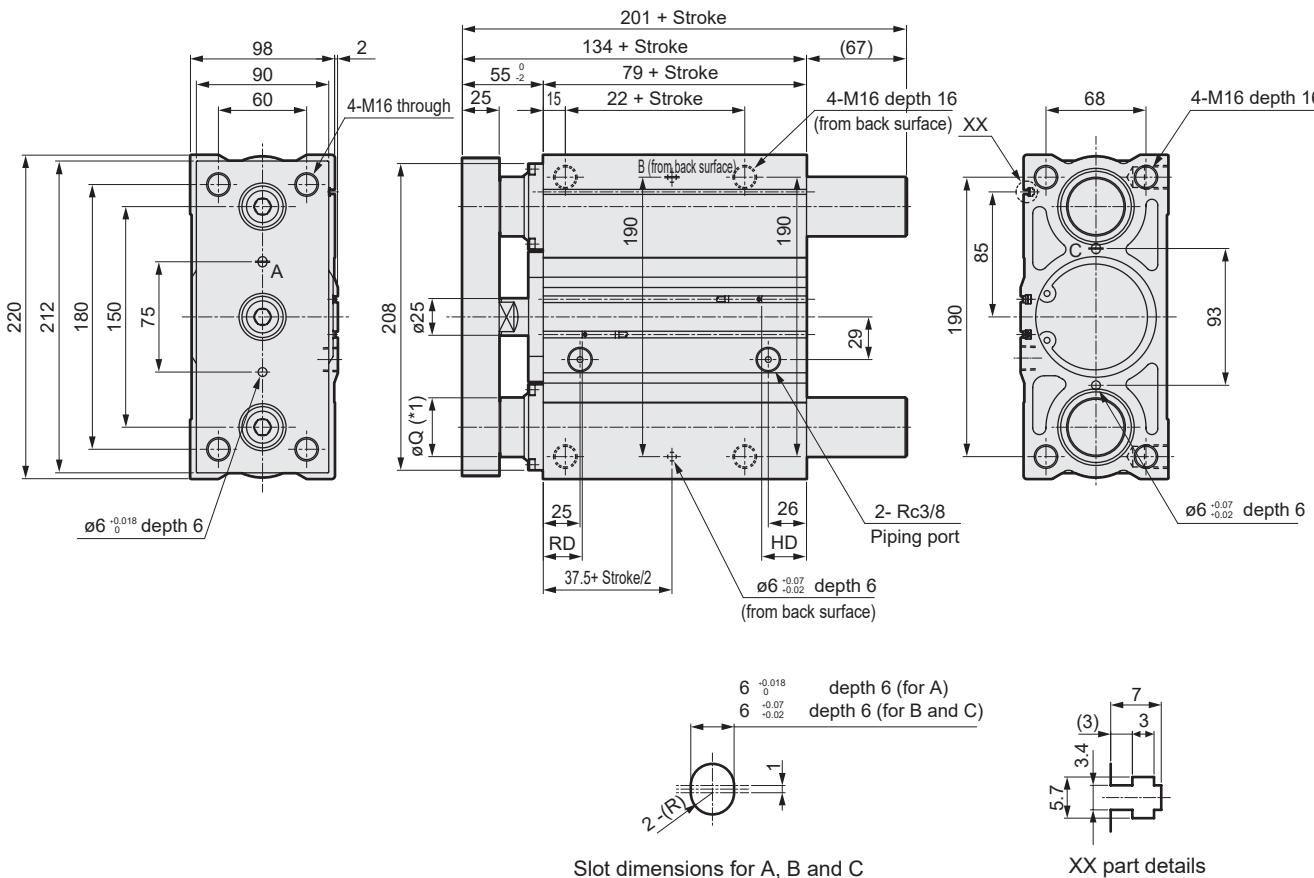

Code	T0/T5/T2/T3		T2W/T3W		
	RD	HD	RD	HD	
Bore size(mm)	ø80	26.5	30.5	28	35.5

*1: Dimension Q is ø40 for M (metal bush bearing) and ø35 for B (ball bearing).

*2: When using a custom Stroke, the dimensions are the same as the longer standard Stroke. The standard Stroke of ø80 can be selected from 75 to 400 mm in 25 mm increments.

*3: Refer to "Pneumatic Cylinders II (No. CB-030SA)" for RD, HD and protruding dimensions of the 2-color display (except for T2WH/V and T3WH/V), off-delay, AC magnetic field proof, T1H/V and T8H/V switches.


STL-^M_BG-HP1 Series

Dimensions ($\phi 100$)




- Standard single rod STL-^M_BG-HP1
- Corrosion proof STL-^M_BG-M/M1-HP1
- Copper and PTFE free STL-^M_BG-P6-HP1

[100 Stroke or less]

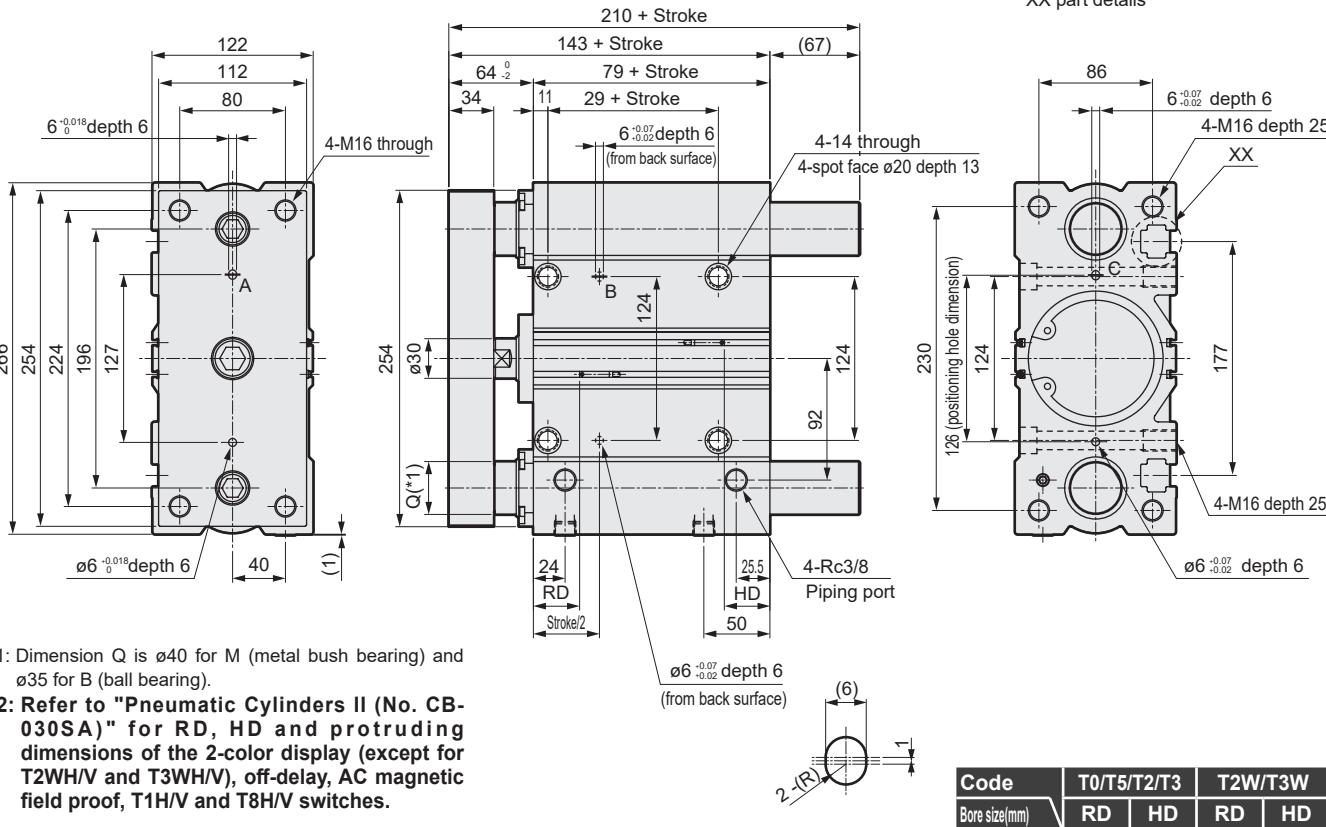

[125 and over Stroke]

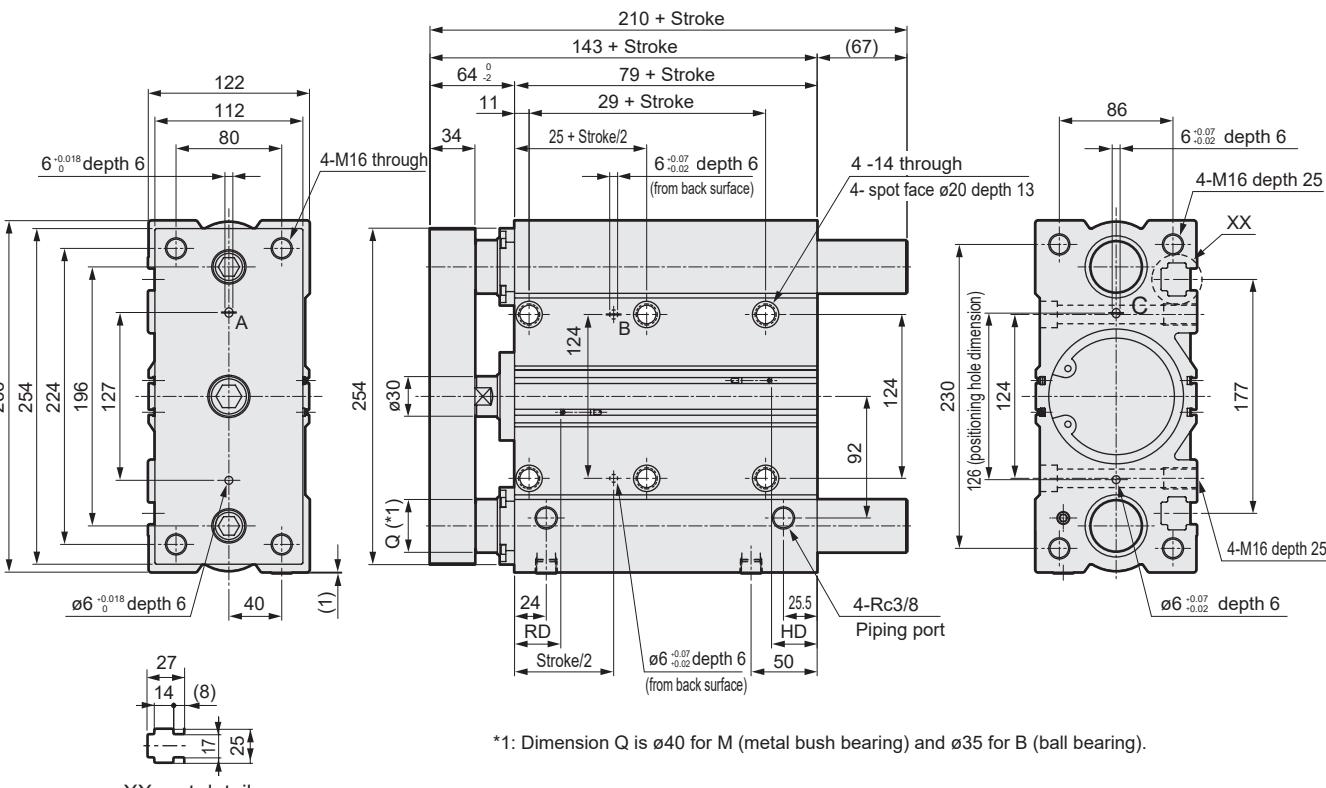

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	


LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	

SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

HP1
HP2 Series

Linear Slide Hand

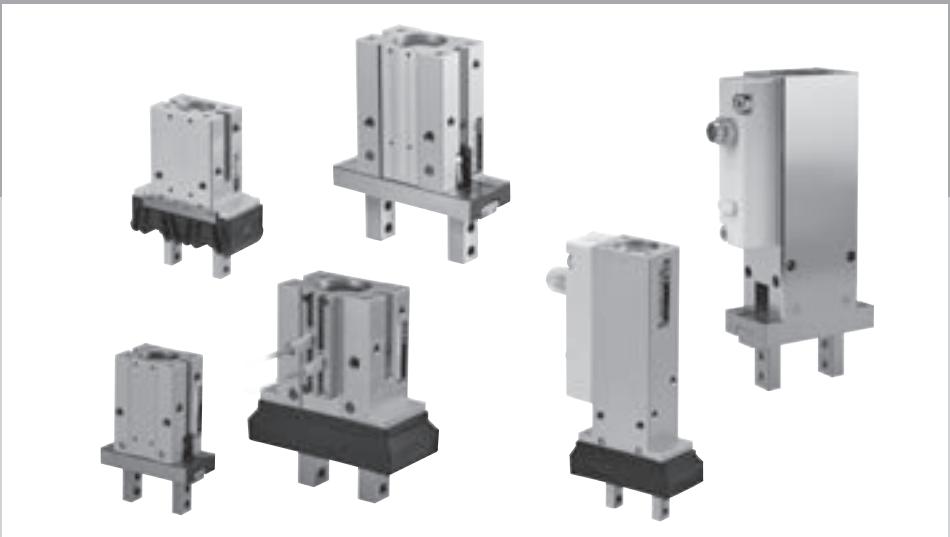

CONTENTS

● HP1 Series

- | | |
|---|-----|
| Double acting/single acting without rubber cover (LSH-A-HP1) | 118 |
| Double acting/single acting with rubber cover (LSH-G/LSH-F-HP1) | 122 |
| Double acting long Stroke without rubber cover (LSHL-A-HP1) | 126 |
| Double acting long Stroke with rubber cover (LSHL-G/LSHL-F-HP1) | 130 |

● HP2 Series

- | | |
|---|-----|
| With length measuring function, double acting without rubber cover (LSHM-A-HP2) | 134 |
| With length measuring function, double acting with rubber cover (LSHM-G/LSHM-F-HP2) | 136 |

⚠ Precautions for use

222

Linear slide hand system table

Model No.	Bore size (mm)	Operating Stroke (mm)
HP1 Series	LSH-A-HP1	ø6/ø10/ø16/ø20/ø25/ø32
	LSH-G/LSH-F-HP1	ø6/ø10/ø16/ø20/ø25/ø32
	LSHL-A-HP1	ø10/ø16/ø20/ø25
	LSHL-G/LSHL-F-HP1	ø10/ø16/ø20
HP2 Series	LSHM-A-HP2	ø10/ø16/ø20/ø25
	LSHM-G/LSHM-F-HP2	ø10/ø16/ø20/ø25


Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STS
STL
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LST
LSTM
Air Booster
ABP2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
Compatible with rechargeable batteries
SCPD3
CMK2
SCM
SCG
SSD2
STG
Supports food mfg. processes



Linear Slide Hand Double acting/Single acting

LSH-A-HP1 Series


● Operating Stroke: 4, 6, 10, 14, 22mm

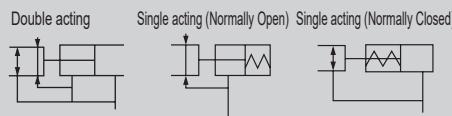

Specifications

Descriptions		LSH-A								
LCG	Bore size mm	ø6 ø10 ø16 ø20 ø25 ø32								
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)								
STG	Working fluid	Compressed air								
STR2	Max. working pressure MPa	0.7								
SCPD3	Min. working pressure MPa	Double acting	0.15	0.2	0.1					
CMK2		Single acting	0.3	0.35	0.25					
SCM	Port size	M3 M5								
SSD2	Ambient temperature °C	-10 to 60 (no freezing)								
SMG	Operating Stroke mm	4 6 10 14 22								
LCR	Repeatability mm	±0.01								
STS	Weight Double acting (Single acting)kg	Finger OP: 1, 2, 3 Finger OP: 4	0.032	0.06	0.135 0.14	0.275 (0.28) 0.28 (0.285)	0.49 (0.495) 0.495 (0.5)	0.73 (0.78) 0.76 (0.81)		
STL	Lubrication	Not required								

Gripping power

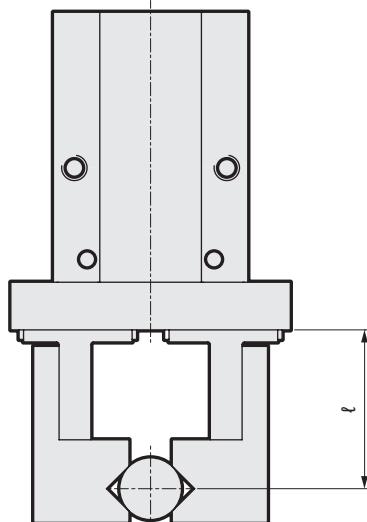

Unit: N

Bore size (mm)	Double acting	
	Open side	Closed side
ø6	6.1	3.3
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65
ø32	193	158

Bore size (mm)	Single acting (Normally Open)	
	Closed side	
ø6		1.9
ø10		7.1
ø16	-	27
ø20		33
ø25		45
ø32		131

Bore size (mm)	Single acting (Normally Closed)	
	Open side	
ø6	3.7	
ø10	13	
ø16	38	
ø20	57	
ø25	83	
ø32	161	

* At supply pressure of 0.5 MPa, $\ell = 20$ mm, stroke center

*1: Avoid gripping the workpiece with single acting spring force as much as possible. The gripping power may become unstable, leading to operation failure.

Switch specifications

Descriptions	Proximity 2-wire	Proximity 3-wire	Proximity 2-wire	Proximity 3-wire			
	F2S	F3S	F2H/F2V	F3H/F3V	F3PH/F3PV		
Applications	Programmable Controller dedicated	Programmable For controller, relay	Programmable Controller dedicated	Programmable For controller, relay			
Output method	-	NPN output	-	NPN output	PNP output		
Power supply voltage	-	10 to 28 VDC	-	10 to 28 VDC	4.5 to 28 VDC		
Load voltage/current	10 to 30 VDC 5 to 20mA	30 VDC 50 mA or less	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less			
Display lamp	LED (Lit when ON)		Yellow LED (Lit when ON)				
Leakage current	1 mA or less	10 µA or less	1 mA or less	10 µA or less			
Shock resistance	980m/s ²						
Weight g	1m:10 3m:29						

*1: The F type switch uses a bend-resistant lead wire as standard.

Descriptions	Proximity 2-wire		Proximity 3-wire				
	T2H/T2V	T2HR3/T2VR3 (Lead wire bending type)	T3H/T3V	T3PH/T3PV			
Applications	Programmable Controller dedicated		Programmable For controller, relay				
Output method	-	-	NPN output	PNP output			
Power supply voltage	-	-	10 to 28 VDC				
Load voltage/current	10 to 30 VDC 5 to 20mA	10 to 30 VDC 5 to 20mA	30 VDC or less 100 mA or less				
Display lamp	Red LED (Lit when ON)	Red LED (Lit when ON)	Red LED (Lit when ON)	Yellow LED (Lit when ON)			
Leakage current	1 mA or less	1 mA or less	10 µA or less				
Shock resistance	980m/s ²						
Weight g	1m:18g 3m:49g						

Consumable parts list

Bore size	Kit No.	Consumable parts No.	Rail plate kit No.		
			For F type switch	For T type switch	Item
ø6	Cannot be disassembled	CR ring/rod packing/ Piston packing/O-ring	LSH-RPF-06-HP	-	Rail plate Small machine screw
ø10	LSH-10K-HP		LSH-RPF-10-HP	-	
ø16	LSH-16K-HP		LSH-RPF-16-HP	-	
ø20	LSH-20K-HP		LSH-RPF-20-HP	-	
ø25	LSH-25K-HP		LSH-RPF-25-HP	-	
ø32	LSH-32K-HP		LSH-RPF-32-HP	LSH-RPT-32-HP	

Refer to the LSH-A Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

LSH-A-HP1 Series

How to order

Without switch (built-in magnet for switch)

LSH - A 06 D 1 R — HP1

With switch (built-in magnet for switch)

LSH - A 06 D 1 R - F2H - D - HP1

A Rubber cover

B Bore size


C Actuation

D Finger

E Grip center reference, high precision positioning hole

F Switch model No.

Grip center reference, high precision positioning hole position diagram

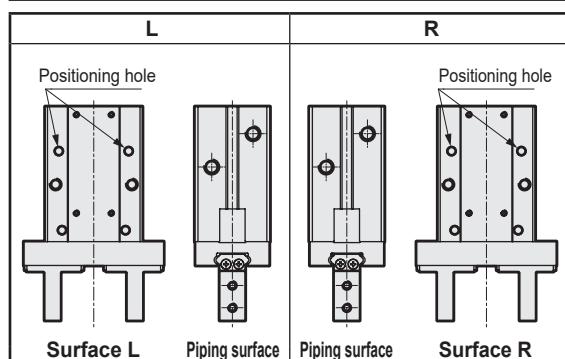

Refer to "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for details.

How to order switch

SW - F2H*

Switch model No.
(Item F above)

[Example of model No.]

LSH-A06D1R-F2H-D-HP1

Model: Linear Slide Hand

A Rubber cover : Without rubber cover

B Bore size : ø6

C Actuation : Double acting

D Finger : Basic

E Grip center reference, high precision positioning hole

F Switch model No. : Proximity F2H, lead wire 1 m

G Switch quantity : 2

Code	Description		
A Rubber cover			
A	Without rubber cover		
B Bore size (mm)			
06	ø6		
10	ø10		
16	ø16		
20	ø20		
25	ø25		
32	ø32		
C Actuation			
D	Double acting		
S	Single acting/Normally Open		
C	Single acting/Normally Closed		
D Finger	* Refer to the Dimensions for details.		
1	Basic		
2	Side tap		
3	Through hole		
4	Flat		
E Grip center reference, high precision positioning hole			
N	None		
L	Refer to the figure at left.		
R			
F Switch model No.			
Blank	No switch, with F type switch rail		
N	No switch, no switch rail		
A	No switch, with T type switch rail (ø32 only)		
Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage
-	F2S*		AC
-	F3S*		DC
F2H*	F2V*		1-color display
F3H*	F3V*		
F3PH*	F3PV*		
T2H*	T2V*		
T2HR3	T2VR3		
T3H*	T3V*		
T3PH*	T3PV*		
* Lead wire length			
Blank	1 m (standard)		
3	3 m (option)		
G Switch quantity			
R	1 on open side		
H	1 on closed side		
D	2		

*1: If the one with the switch is selected, the product comes with a rail plate corresponding to the switch.

*2: Only ø32 can be selected for the T-switch

*3: Refer to page 121 for cylinder switch precautions.

Switch mounting availability table

Model No.	Switch model No.	Side mounting	Rail mounting
LSH-A06	F2/3□	●	-
	F2/3S	-	●
LSH-A10	F2/3□	●	●
	F2/3S	●	●
LSH-A16	F2/3□	●	●
	F2/3S	●	●
LSH-A20	F2/3□	●	●
	F2/3S	●	●
LSH-A25	F2/3H, PH	-	●
	F2/3V, PV	●	●
	F2/3S	●	●
LSH-A32	F2/3□	●	●
	F2/3S	●	●
	T2/3□	-	●

Long service life cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries


Supports food mfg. processes

Cylinder switch precautions


● Switch mounting position list

[Side mounting]

ø6 to 20, 32

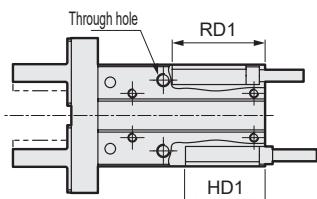


ø25

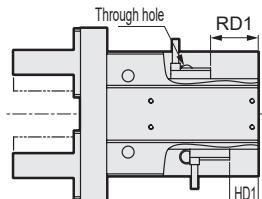

[Rail mount]

ø6 to 32

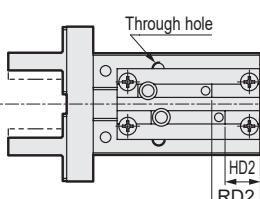

Model No.	Switch Model No.	Side mounting		Rail mounting	
		RD1	HD1	RD2	HD2
LSH-A06*	F2/3 □	20.5	18	-	-
	F2/3S	-	-	9.5 (-)	7 (-)
LSH-A10*	F2/3 □	21	18	11 (21)	8 (18)
	F2/3S	22	19	10 (22)	7 (19)
LSH-A16*	F2/3 □	21	17	11 (21)	7 (17)
	F2/3S	22	18	10 (22)	6 (18)
LSH-A20*	F2/3 □	26	20	16 (26)	10 (20)
	F2/3S	27	21	15 (27)	9 (21)
LSH-A25*	F2/3H, PH	-	-	20 (30)	12 (22)
	F2/3V, PV	20	12	20 (30)	12 (22)
	F2/3S	19	11	19 (31)	11 (23)
LSH-A32D	F2/3 □	32.5	20.5	22.5 (32.5)	10.5 (20.5)
	F2/3S	33.5	21.5	21.5 (33.5)	9.5 (21.5)
	T2/3 □	-	-	18.5 (36.5)	6.5 (24.5)
LSH-A32S/C	F2/3 □	41	29	31 (41)	19 (29)
	F2/3S	42	30	30 (42)	18 (30)
	T2/3 □	-	-	27 (45)	15 (33)

*When the lead wire is directed toward the head side, the dimension in parentheses apply.


**- indicates it cannot be mounted.

● Precautions

Refer to precautions in the following table for the bore size to be used.

Category	Bore size						Precautions												
	ø6	ø10	ø16	ø20	ø25	ø32													
Common items	●	●	●	●	●	●	• RD dimension is the max. sensitivity position at open side end position and HD dimension at closed side end position. The actual mounting position should be adjusted after confirming the operational status of the switch. *One switch can be mounted for one switch rail groove.												
	●	●	●	●	●	●	• Since the opening and closing stroke is short, only one of the open or closed states is detected for each switch. Ex: A single switch alone cannot detect what is shown in the following illustration. (1)Open (workpiece not gripped): switch OFF (2) Workpiece gripped: switch ON (3)Closed (workpiece not gripped): switch OFF 												
	●	●	●	●	●	●													
	●	●	●	●	●	●	*Be careful not to be caught in the lead wires when opening/closing the finger.												
Side mounting	●	●	●	●	●	●	* When using the L type switch for side mounting on the side of the port, the fittings may interfere with the switch. Use fittings whose outer diameters are below those indicated in the following table. Mount position: port side Switch type: L-shaped type <table border="1"><thead><tr><th>Bore size (mount position)</th><th>Fitting O.D. øD</th></tr></thead><tbody><tr><td>ø6 (RD)</td><td>ø5 or less</td></tr><tr><td>ø6 (HD)</td><td>ø6.9 or less</td></tr><tr><td>ø10</td><td>ø7.4 or less</td></tr><tr><td>ø16</td><td>ø7.9 or less</td></tr><tr><td>ø20</td><td>ø11 or less</td></tr></tbody></table> 	Bore size (mount position)	Fitting O.D. øD	ø6 (RD)	ø5 or less	ø6 (HD)	ø6.9 or less	ø10	ø7.4 or less	ø16	ø7.9 or less	ø20	ø11 or less
Bore size (mount position)	Fitting O.D. øD																		
ø6 (RD)	ø5 or less																		
ø6 (HD)	ø6.9 or less																		
ø10	ø7.4 or less																		
ø16	ø7.9 or less																		
ø20	ø11 or less																		
●	●	●	●	●	●	• When using a lead wire straight F3PV switch, the switch and lead wire protrude from the end face of the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.													
●	●	●	●	●	●	*For switch side mounting, the through hole cannot be used.													
Rail Mounting	●	●					*For switch rail mounting, the through hole cannot be used.												


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	Environment-resistant cylinder
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	LSH-A
CMK2	LSH-G
SCM	LSH-F
SCG	LSHL-A
SSD2	LSHL-G
MSD	LSHL-F
MSDG-L	LSHM-A
SMG	LSHM-G
LCR	LSHM-F
LCG	
STM	
STG	
STR2	
ABP2	Low-profile long stroke hand
SCPD3	Air Booster
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	Compatible with rechargeable batteries
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

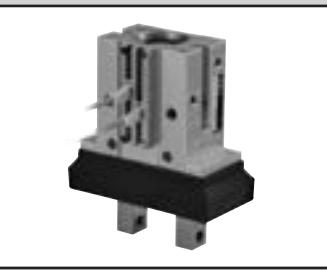

Linear Slide Hand Double acting/Single acting with rubber cover

LSH-G/LSH-F-HP1 Series


● Operational Stroke: 4, 6, 10, 14, 22 mm

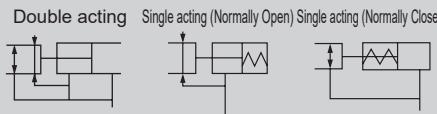

Specifications

Descriptions		LSH-G, F					
LCG	Bore size mm	ø6	ø10	ø16	ø20	ø25	ø32
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)					
STG	Working fluid	Compressed air					
STR2	Max. working pressure MPa	0.7					
SCPD3	Min. working pressure MPa	0.15	0.2	0.1			-
CMK2	Single acting	0.3	0.35	0.25			-
SCM	Port size	M3		M5			
SCG	Ambient temperature °C	-10 to 60°C (no freezing)					
SSD2	Operating Stroke mm	4	6	10	14	22	
SMG	Repeatability mm	±0.01					
LCR	Weight Double acting (single acting) kg	0.033	0.07	0.15	0.3 (0.35)	0.53 (0.535)	0.81
STG	Lubrication	Not required					
STS							
STL							
LSH-A							
LSH-G							
LSH-F							
LSHL-A							
LSHL-G							
LSHL-F							
LSHM-A							
LSHM-G							
LSHM-F							
LST							
LSTM							
ABP2							
SCPD3							
CMK2							
SCM							
SSD2							
MSD							
MSDG-L							
SMG							
STG							
STM							
LCR							
LCG							
STR2							
LSH-A							
LSH-G							
LSH-F							
LSHL-A							
LSHL-G							
LSHL-F							
SCPD3							
CMK2							
SCM							
SCG							
SSD2							
STG							
Supports food mfg. processes							

Gripping power

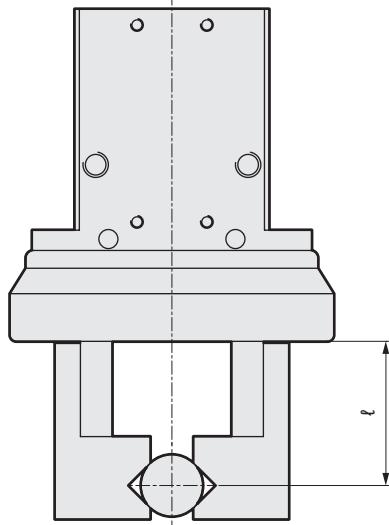

Unit: N

Bore size (mm)	Double acting	
	Open side	Closed side
ø6	6.1	3.3
ø10	17	9.8
ø16	40	30
ø20	66	42
ø25	104	65
ø32	193	158
Bore size (mm)	Single acting (Normally Open)	
	Closed side	
ø6	1.9	
ø10	6.3	
ø16	-	
ø20	24	
ø25	28	
	45	
Bore size (mm)	Single acting (Normally Closed)	
	Open side	
ø6	3.7	
ø10	12	
ø16	31	
ø20	56	
ø25	83	

* At supply pressure of 0.5 MPa, $l = 20$ mm, stroke center

*1: Avoid gripping the workpiece with single acting spring force as much as possible. The gripping power may become unstable, leading to operation failure.

LSH-G/LSH-F-HP1 Series

Switch specifications

Switch specifications

Item	Proximity 2-wire	Proximity 3-wire	Proximity 2-wire	Proximity 3-wire			
	F2S	F3S	F2H/F2V	F3H/F3V	F3PH/F3PV		
Applications	Programmable Controller dedicated	Programmable For controller, relay	Programmable Controller dedicated	Programmable For controller, relay			
Output method	-	NPN output	-	NPN output	PNP output		
Power supply voltage	-	10 to 28 VDC	-	10 to 28 VDC	4.5 to 28 VDC		
Load voltage/current	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less			
Display lamp	LED (Lit when ON)		Yellow LED (Lit when ON)				
Leakage current	1 mA or less	10 µA or less	1 mA or less	10 µA or less			
Shock resistance	980m/s ²						
Weight	g	1m:10 3m:29					

*1: The F type switch uses a bend-resistant lead wire as standard.

Item	Proximity 2-wire		Proximity 3-wire			
	T2H/T2V	T2HR3/T2VR3 (Lead wire bending type)	T3H/T3V	T3PH/T3PV		
Applications	Programmable Controller dedicated		Programmable For controller, relay			
Output method	-	-	NPN output	PNP output		
Power supply voltage	-	-	10 to 28 VDC			
Load voltage/current	10 to 30 VDC 5 to 20mA	10 to 30 VDC 5 to 20mA	30 VDC or less 100 mA or less			
Display lamp	Red LED (Lit when ON)	Red LED (Lit when ON)	Red LED (Lit when ON)	Yellow LED (Lit when ON)		
Leakage current	1 mA or less	1 mA or less	10 µA or less			
Shock resistance	980m/s ²					
Weight	g	1m:18g 3m:49g				

Consumable parts list

Tube Bore size	Kit No.	Consumable parts No.	Rubber cover (part No. 3)		Rail plate kit No.		Item
			LSH-G Chloroprene	LSH-F Fluorine	For F type switch	For T type switch	
ø6	Cannot be disassembled	-	LSH-G06K	LSH-F06K	LSH-RPF-06-HP	-	Rail plate Small machine screw
ø10	LSH-10K-HP	CR ring Rod packing Piston packing O-ring	LSH-G10K	LSH-F10K	LSH-RPF-10-HP	-	
ø16	LSH-16K-HP		LSH-G16K	LSH-F16K	LSH-RPF-16-HP	-	
ø20	LSH-20K-HP	Rod packing Piston packing O-ring	LSH-G20K	LSH-F20K	LSH-RPF-20-HP	-	
ø25	LSH-25K-HP		LSH-G25K	LSH-F25K	LSH-RPF-25-HP	-	
ø32	LSH-32K-HP		LSH-G32K	LSH-F32K	LSH-RPF-32-HP	LSH-RPT-32-HP	

Refer to the LSH-G/LSH-F Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

LSH-G/LSH-F-HP1 Series

How to order

Without switch (built-in magnet for switch)

LSH - G 06 D 1 R - HP1

With switch (built-in magnet for switch)

LSH - G 06 D 1 R - F2H - D - HP1

ARubber cover

BBore size


CActuation

DFinger

EGrip center reference, High precision positioning hole

FSwitch model No.

Grip center reference, High precision positioning hole position diagram

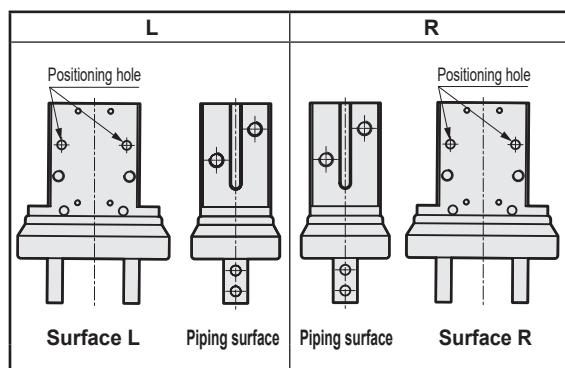

Details on each Dimensions "Linear Slide Hand LSH-HP Series (No.CC-1419A).

How to order switch

SW - F2H*

Switch model No.
(Item **F** above)

[Example of model No.]

LSH-G06D1R-F2H-D-HP1

Model: Linear Slide Hand

ARubber cover : Chloroprene rubber

BBore size : ø6

CActuation : Double acting

DFinger : Basic

EGrip center reference, high precision positioning hole : R

FSwitch model No. : Proximity F2H, lead wire 1 m

GSwitch quantity : 2

Code	Description
A Rubber cover	
G	Chloroprene rubber
F	Fluoro rubber

Bore size (mm)	
06	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Actuation	
D	Double acting
S	Single acting / Normally Open (ø32 cannot be selected)
C	Single acting/Normally Closed (ø32 cannot be selected)

D Finger	
1	Basic

E Grip center reference, high precision positioning hole	
N	None
L	Refer to the figure at left.
R	

F Switch model No.	
Blank	No switch, with F type switch rail
N	No switch, no switch rail
A	No switch, with T type switch rail (ø32 only)
Lead wire Straight type	Lead wire L-shaped type
-	F2S*
-	F3S*
F2H*	F2V*
F3H*	F3V*
F3PH*	F3PV*
T2H*	T2V*
T2HR3	T2VR3
T3H*	T3V*
T3PH*	T3PV*

* Lead wire length

Blank 1 m (standard)

3 3 m (option)

G Switch quantity	
R	1 on open side
H	1 on closed side
D	2

*1:If the one with the switch is selected, the product comes with a rail plate corresponding to the switch.

*2: Only ø32 can be selected for the T-switch

*3: Refer to page 125 for cylinder switch precautions.

Switch mounting availability table


Model No.	Switch model No.	Side mounting	Rail mounting
LSH-G/F06	F2/3□	●	-
	F2/3S	-	●
LSH-G/F10	F2/3□	●	●
	F2/3S	●	●
LSH-G/F16	F2/3□	●	●
	F2/3S	●	●
LSH-G/F20	F2/3□	●	●
	F2/3S	●	●
LSH-G/F25	F2/3H, PH, PV	-	●
	F2/3V	●	●
	F2/3S	●	●
LSH-G/F32	F2/3□	●	●
	F2/3S	●	●
	T2/3□	-	●

Cylinder switch precautions


● Switch mounting position list

[Side mounting]

ø6 to 20, 32

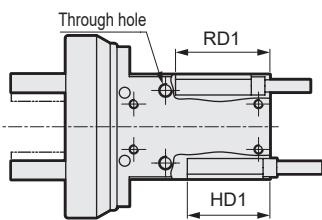


ø25



[Rail mount]

ø6 to 32

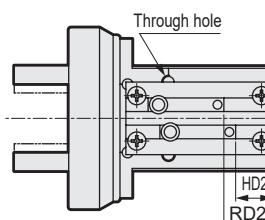

Model No.	Switch Model No.	Side mounting		Rail mounting	
		RD1	HD1	RD2	HD2
LSH-G/F06	F2/3 □	20.5	18	-	-
	F2/3S	-	-	9.5 (-)	7 (-)
LSH-G/F10	F2/3 □	21	18	11 (21)	8 (18)
	F2/3S	22	19	10 (22)	7 (19)
LSH-G/F16	F2/3 □	21	17	11 (21)	7 (17)
	F2/3S	22	18	10 (22)	6 (18)
LSH-G/F20	F2/3 □	26	20	16 (26)	10 (20)
	F2/3S	27	21	15 (27)	9 (21)
LSH-G/F25	F2/3 □	-	-	20 (30)	12 (22)
	F2/3V	20	12	20 (30)	12 (22)
	F2/3S	19	11	19 (31)	11 (23)
LSH-G/F32	F2/3 □	26	14	16 (26)	4 (14)
	F2/3S	27	15	15 (27)	3 (15)
	T2/3 □	-	-	12 (30)	0 (18)

*When the lead wire is directed toward the head side, the dimension in parentheses apply.

*"- " indicates it cannot be mounted.

● Precautions

Refer to precautions in the following table for the bore size to be used.

Category	Bore size						Precautions												
	ø6	ø10	ø16	ø20	ø25	ø32													
Common items	●	●	●	●	●	●	* RD dimension is the max. sensitivity position at open side end position and HD dimension at closed side end position. The actual mounting position should be adjusted after confirming the operational status of the switch.												
	●	●	●	●	●	●	* One switch can be mounted for one switch rail groove.												
	●	●	●	●	●	●	* Since the opening and closing stroke is short, only one side of the open or closed state is detected for each switch. Ex: A single switch alone cannot detect what is shown in the following illustration. (1)Open (workpiece not gripped): switch OFF (2) Workpiece gripped: switch ON (3)Closed (workpiece not gripped): switch OFF												
	●	●	●	●	●	●													
Side mounting	●	●	●	●	●	●	* Be careful not to be caught in the lead wires when opening/closing the finger.												
	●	●	●	●	●	●	* When using the L type switch for side mounting on the side of the port, the fittings may interfere with the switch. Use fittings whose outer diameters are below those indicated in the following table.												
	●	●	●	●	●	●	Mount position: port side Switch type: L-shaped type												
Rail mounting	●	●	●	●	●	●	<table border="1"> <thead> <tr> <th>Bore size (mount position)</th> <th>Fitting O.D. øD</th> </tr> </thead> <tbody> <tr> <td>ø6 (RD)</td> <td>ø5 or less</td> </tr> <tr> <td>ø6 (HD)</td> <td>ø6.9 or less</td> </tr> <tr> <td>ø10</td> <td>ø7.4 or less</td> </tr> <tr> <td>ø16</td> <td>ø7.9 or less</td> </tr> <tr> <td>ø20</td> <td>ø11 or less</td> </tr> </tbody> </table>	Bore size (mount position)	Fitting O.D. øD	ø6 (RD)	ø5 or less	ø6 (HD)	ø6.9 or less	ø10	ø7.4 or less	ø16	ø7.9 or less	ø20	ø11 or less
Bore size (mount position)	Fitting O.D. øD																		
ø6 (RD)	ø5 or less																		
ø6 (HD)	ø6.9 or less																		
ø10	ø7.4 or less																		
ø16	ø7.9 or less																		
ø20	ø11 or less																		
●	●	●	●	●	●	* When using a lead wire straight F3PV switch, the switch and lead wire protrude from the end face of the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.													
●	●	●	●	●	●	* The F2/3V switch projects from the end face of the head side. If this protrusion is a problem, use F2/3S or mount a rail.													
Rail mounting	●	●	●	●	●	●	* For switch side mounting, the through hole cannot be used.												
	●	●	●	●	●	●	* For switch rail mounting, the through hole cannot be used.												


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Linear Slide Hand Long stroke Double acting/single acting

LSHL-A-HP1 Series

● Operating Stroke: 8, 12, 18, 22mm

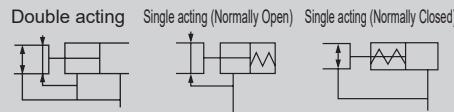


Specifications

Descriptions		LSHL-A				
LCG	Bore size mm	ø10	ø16	ø20	ø25	
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)				
STG	Working fluid	Compressed air				
STR2	Max. working pressure MPa	0.7				
SCPD3	Min. working pressure MPa	Double acting 0.2	0.1	0.25		
CMK2	Single acting	0.35				
SCM	Port size	M3	M5			
SSD2	Ambient temperature °C	-10 to 60 (no freezing)				
SMG	Operating Stroke mm	8	12	18	22	
LCR	Repeatability mm	±0.01				
STG	Weight Double acting (Single acting) kg	Finger OP: 1, 2, 3 Finger OP: 4	0.065 (0.075)	0.155 (0.165) 0.16 (0.17)	0.315 (0.335) 0.32 (0.34)	0.54 (0.585) 0.545 (0.59)
STS	Lubrication	Not required				
STL						

Gripping power

Unit: N

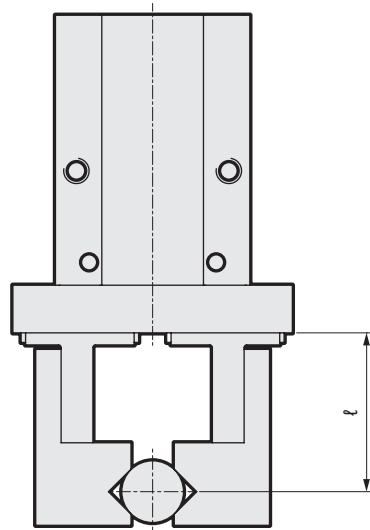

Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65

Bore size (mm)	Single acting (Normally Open)	
	Open side	Closed side
ø10		7.1
ø16	-	27
ø20		33
ø25		50

Bore size (mm)	Single acting (Normally Closed)	
	Open side	
ø10	13	
ø16	38	
ø20	57	-
ø25	85	

* At supply pressure of 0.5 MPa, l = 20 mm, stroke center

*1: Avoid gripping the workpiece with single acting spring force as much as possible. The gripping power may become unstable, leading to operation failure.

Switch specifications

Item	Proximity 2-wire		Proximity 3-wire	
	F2S	F3S	F2H/F2V	F3H/F3V
Applications	Programmable Controller dedicated	Programmable For controller, relay	Programmable Controller dedicated	Programmable For controller, relay
Output method	-	NPN output	-	NPN output PNP output
Power supply voltage	-	10 to 28 VDC	-	10 to 28 VDC 4.5 to 28 VDC
Load voltage/current	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less
Display lamp	LED (Lit when ON)		Yellow LED (Lit when ON)	
Leakage current	1 mA or less	10 µA or less	1 mA or less	10 µA or less
Shock resistance	980m/s ²			
Weight g	1m:10 3m:29			

*1: The F type switch uses a bend-resistant lead wire as standard.

Refer to the LSHL-A Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LCR
STM
STG
STS
STL

Linear Slide Hand

LSH-A
LSH-G
LSH-F

Low-profile long stroke hand

LST
LSTM

Air Booster

ABP2
SCPD3
CMK2
SCM
SSD2
MSD

Compatible with rechargeable batteries

MSDG-L
SMG
STG
STM

Supports food mfg. processes

SCPD3
CMK2
SCM
SSD2
STG

How to order


Without switch (built-in magnet for switch)

LSHL - A 10 D 1 R ————— **HP1**

With switch (built-in magnet for switch)

LSHL - A 10 D 1 R - F2H - D - HP1**A**Rubber cover**B**Bore size**C**Actuation**D**Finger**E**Grip center reference, high precision positioning hole**F**Switch model No.

Grip center reference, high precision positioning hole position diagram

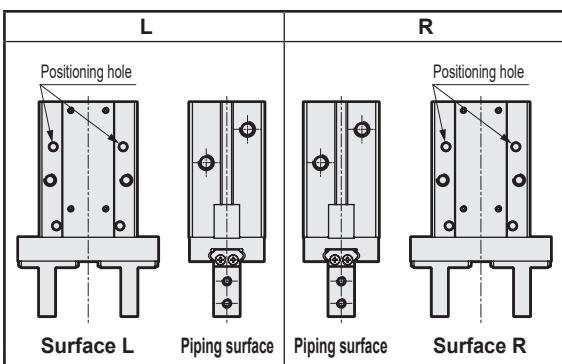

Details on each Dimensions "Linear Slide Hand LSH-HP Series (No.CC-1419A).

How to order switch

SW - F2H*Switch model No.
(item **F** above)

[Example of model No.]

LSHL-A10D1R-N-HP1

Model: Linear Slide Hand, long stroke

ARubber cover : Without rubber cover**B**Bore size : ø10**C**Actuation : Double acting**D**Finger : Basic**E**Grip center reference, high : R
precision positioning hole**F**Switch model No. : Without switch or rail plate

Code	Description
A Rubber cover	
A	Without rubber cover

B Bore size (mm)	
10	ø10
16	ø16
20	ø20
25	ø25

C Actuation	
D	Double acting
S	Single acting/Normally Open
C	Single acting/Normally Closed

D Finger * Refer to the Dimensions for details	
1	Basic
2	Side tap
3	Through hole
4	Flat

E Grip center reference, high precision positioning hole	
N	None
L	Refer to the figure at left.

F Switch model No.					
Blank	Without switch, rail plate attached				
N	Without switch or rail plate				
Lead wire Straight type	Lead wire L-shaped type	Contact point	Voltage AC DC	Display	Lead wire
-	F2S*			●	2-wire
-	F3S*			●	3-wire
F2H*	F2V*			●	2-wire
F3H*	F3V*			●	3-wire
F3PH*	F3PV*			●	3-wire

* Lead wire length

Blank	1 m (standard)
3	3 m (option)

G Switch quantity

R	1 on open side
H	1 on closed side
D	2

*1: When selecting "With switch", a rail plate is attached.

*2: Refer to page 128 for cylinder switch precautions.

Switch mounting availability table

Model No.	Switch model No.	Side mounting	Rail mounting
LSHL-A10	F2/3	□	●
	F2/3S	●	●
LSHL-A16	F2/3	□	●
	F2/3S	●	●
LSHL-A20	F2/3	□	●
	F2/3S	●	●
LSHL-A25	F2/3	□	●
	F2/3S	●	●

Consumable parts list

Tube Bore size	Kit No.	Consumable parts No.	Rail plate kit No.		Item	
			For double acting	For single acting		
ø10	LSHL-10K-HP	CR ring Rod packing	LSHL-RPF-10-HP	LSHL-RPF2-10-HP	Rail plate Small machine screw	
ø16	LSHL-16K-HP	Piston packing O-ring	LSHL-RPF-16-HP			
ø20	LSHL-20K-HP	Rod packing Piston packing	LSHL-RPF-20-HP			
ø25	LSHL-25K-HP	O-ring	LSHL-RPF-25-HP			

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LST	Linear Slide Hand
LSTM	Low-profile long stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LSHL-A-HP1 Series


SCP3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG

Cylinder switch precautions

● Switch mounting position list


[Side mounting]

ø10 to 25

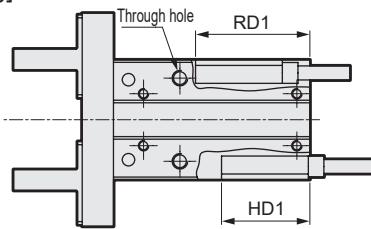

[Rail mount]

ø10 to 25

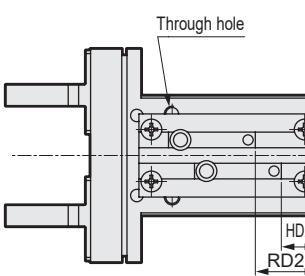

Model No.	Switch Model No.	Side mounting		Rail mounting	
		RD1	HD1	RD2	HD2
LSHL-A10D	F2/3 □	22	17	12 (22)	7 (17)
	F2/3S	23	18	11 (23)	6 (18)
LSHL-A16D	F2/3 □	24.5	16.5	14.5(24.5)	6.5 (16.5)
	F2/3S	25.5	17.5	13.5 (25.5)	5.5 (17.5)
LSHL-A20D	F2/3 □	30	20	20 (30)	10 (20))
	F2/3S	31	21	19 (31)	9 (21)
LSHL-A25D	F2/3 □	33	21.5	23 (33)	11.5 (21.5)
	F2/3S	34	22.5	22(34)	10.5 (22.5)
LSHL-A10S/C	F2/3 □	28	23	18 (28)	13 (23)
	F2/3S	29	24	17 (29)	12 (24)
LSHL-A16S/C	F2/3 □	27.5	20	17.5 (27.5)	10 (20)
	F2/3S	28.5	21	16.5 (28.5)	9 (21)
LSHL-A20S/C	F2/3 □	33.5	23	23.5 (33.5)	13 (23)
	F2/3S	34.5	24	22.5 (34.5)	12 (24)
LSHL-A25S/C	F2/3 □	38.5	27	28.5 (38.5)	17 (27)
	F2/3S	39.5	28	27.5 (39.5)	16 (28)

*When the lead wire is directed toward the head side, the dimension in parentheses apply.

● Precautions

Refer to precautions in the following table for the bore size to be used.

Category	Bore size				Precautions							
	ø10	ø16	ø20	ø25								
Common items	●	●	●	●	• RD dimension is the max. sensitivity position at open side end position and HD dimension at closed side end position. The actual mounting position should be adjusted after confirming the operational status of the switch.							
	●	●	●	●	*One switch can be mounted for one switch rail groove.							
	●	●	●	●	• Since the opening and closing stroke is short, only one of the open or closed states is detected for each switch. Ex: A single switch alone cannot detect what is shown in the following illustration. (1)Open (workpiece not gripped): switch OFF (2) Workpiece gripped: switch ON (3)Closed (workpiece not gripped): switch OFF							
	●	●	●	●								
	●	●	●	●	*Be careful not to be caught in the lead wires when opening/closing the finger.							
	●	●	●	●	* When using the L type switch for side mounting on the side of the port, the fittings may interfere with the switch. Use fittings whose outer diameters are below those indicated in the following table.							
	●	●	●	●	Mount position: port side Switch type: L-shaped type							
	●	●	●	●	<table border="1"> <thead> <tr> <th>Bore size</th> <th>Fitting O.D. øD</th> </tr> </thead> <tbody> <tr> <td>ø10</td> <td>ø7.4 or less</td> </tr> <tr> <td>ø16</td> <td>ø7.9 or less</td> </tr> <tr> <td>ø20</td> <td>ø11 or less</td> </tr> </tbody> </table>	Bore size	Fitting O.D. øD	ø10	ø7.4 or less	ø16	ø7.9 or less	ø20
Bore size	Fitting O.D. øD											
ø10	ø7.4 or less											
ø16	ø7.9 or less											
ø20	ø11 or less											
●	●	●	●	• For the lead wire straight switch, the switch and lead wire protrude from the end face on the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.								
●	●	●	●	• The F3PV switch projects from the end face of the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.								
Side mounting	●	●	●	●	*For switch side mounting, the through hole cannot be used.							
	●	●	●	●	*For switch rail mounting, the through hole cannot be used.							
	●	●	●	●								
	●	●	●	●								
Rail Mounting	●	●	●	●								
	●	●	●	●								
	●	●	●	●								
	●	●	●	●								

MEMO


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	



Linear Slide Hand Long stroke Double acting With rubber cover

LSHL-G/LSHL-F-HP1 Series


● Operating Stroke: 8, 12, 18mm



Specifications

Descriptions		LSHL-G, F		
LCG	Bore size mm	ø10	ø16	ø20
STM	Actuation	Double acting		
STG	Working fluid	Compressed air		
STR2	Max. working pressure MPa	0.7		
SCPD3	Min. working pressure MPa	0.2	0.1	
CMK2	Port size	M3	M5	
SCM	Ambient temperature °C	-10 to 60°C (no freezing)		
SSD2	Operating Stroke mm	8	12	18
SMG	Repeatability mm	±0.01		
LCR	Weight kg	0.09	0.18	0.39
STG	Lubrication	Not required		
STS				
STL				

Gripping power

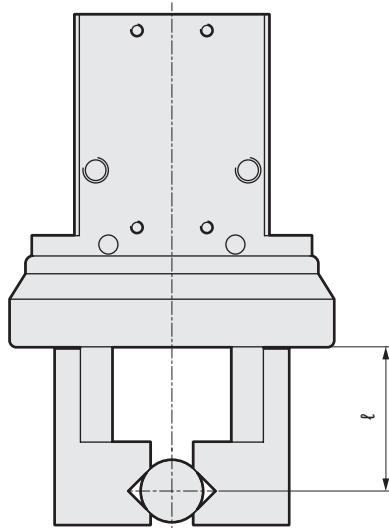

Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42

* At supply pressure of 0.5 MPa, $l = 20$ mm, stroke center

Switch specifications

Item	Proximity 2-wire	Proximity 3-wire	Proximity 2-wire	Proximity 3-wire	
	F2S	F3S	F2H/F2V	F3H/F3V	F3PH/F3PV
STR2	Programmable Controller dedicated	Programmable For controller, relay	Programmable Controller dedicated	Programmable For controller, relay	
LSH-A	-	NPN output	-	NPN output	PNP output
LSH-G	-	10 to 28 VDC	-	10 to 28 VDC	4.5 to 28 VDC
LSH-F	10 to 30 VDC 5 to 20mA	30 VDC 50 mA or less	10 to 30 VDC 5 to 20mA	30 VDC, 50 mA or less	
LSHL-A	LED (Lit when ON)			Yellow LED (Lit when ON)	
LSHL-G	1 mA or less	10 µA or less	1 mA or less	10 µA or less	
LSHL-F					
SCPD3			980m/s ²		
CMK2					
SCM			1m:10 3m:29		
SSD2					
STG					

*1: The F type switch uses a bend-resistant lead wire as standard.

Refer to the LSHL-G/LSHL-F Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

LSHL-G/LSHL-F-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)

LSHL - G 10 D 1 R - HP1

With switch (built-in magnet for switch)

LSHL - G 10 D 1 R - F2H - D - HP1

ARubber cover

BBore size


CActuation

DFinger

EGrip center reference, high precision positioning hole

FSwitch model No.

Grip center reference, High precision positioning hole position diagram

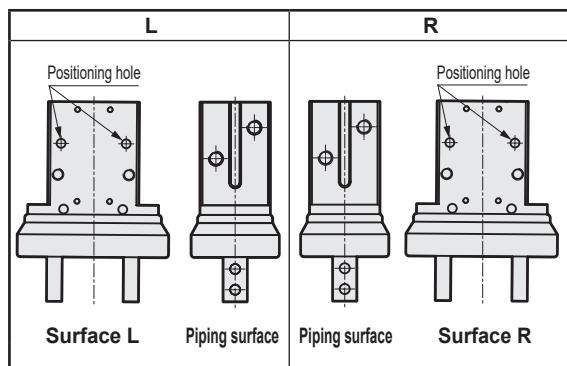

Refer to "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for details.

How to order switch

SW - F2H*

Switch model No.
(Item **F** above)

[Example of model No.]

LSHL-G10D1R-F2H-D-HP1

Model: Linear Slide Hand, long stroke

ARubber cover : Chloroprene rubber

BBore size : ø10

CActuation : Double acting

DFinger : Basic

EGrip center reference, high : R
precision positioning hole

FSwitch model No. : Proximity F2H, lead wire 1 m

GSwitch quantity : 2

Consumable parts list

Bore size (mm)	Kit No.	Consumable parts No.	Rubber cover (part No. 3)		Rail plate Kit No.	Item
			LSHL-G Chloroprene	LSHL-F Fluorine		
ø10	LSHL-10K-HP	CR ring Rod packing	LSHL-G10K	LSHL-F10K	LSHL-RPF-10-HP	Rail plate Small machine screw
ø16	LSHL-16K-HP	Piston packing O-ring	LSHL-G16K	LSHL-F16K	LSHL-RPF-16-HP	
ø20	LSHL-20K-HP	Rod packing Piston packing O-ring	LSHL-G20K	LSHL-F20K	LSHL-RPF-20-HP	

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

LSHL-G/LSHL-F-HP1 Series

Cylinder switch precautions



● Switch mounting position list

[Side mounting]

ø10 to 20

[Rail mount]

ø10 to 20

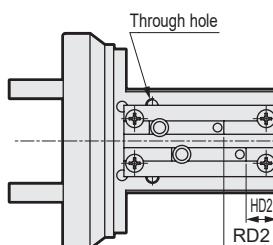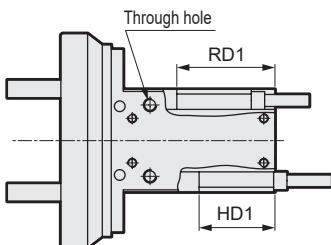

Model No.	Switch Model No.	Side mounting		Rail mounting	
		RD1	HD1	RD2	HD2
LSHL-G/F10	F2/3 □	22	17	12 (22)	7 (17)
	F2/3S	23	18	11 (23)	6 (18)
LSHL-G/F16	F2/3 □	25	17	15 (25)	7 (17)
	F2/3S	26	18	14 (26)	6 (18)
LSHL-G/F20	F2/3 □	35.5	25.5	25.5 (35.5)	15.5 (25.5)
	F2/3S	36.5	26.5	24.5 (36.5)	14.4 (26.5)

*When the lead wire is directed toward the head side, the dimension in parentheses apply.

● Precautions

Refer to precautions in the following table for the bore size to be used.

Category	Bore size			Precautions							
	ø10	ø16	ø20								
Common items	●	●	●	• RD dimension is the max. sensitivity position at open side end position and HD dimension at closed side end position. The actual mounting position should be adjusted after confirming the operational status of the switch.							
	●	●	●	*One switch can be mounted for one switch rail groove.							
				• Since the opening and closing stroke is short, only one of the open or closed states is detected for each switch. Ex: A single switch alone cannot detect what is shown in the following illustration. (1)Open (workpiece not gripped): switch OFF (2) Workpiece gripped: switch ON (3)Closed (workpiece not gripped): switch OFF							
	●	●	●								
	●	●	●	*Be careful not to be caught in the lead wires when opening/closing the finger.							
				* When using the L type switch for side mounting on the side of the port, the fittings may interfere with the switch. Use fittings whose outer diameters are below those indicated in the following table.							
				Mount position: port side Switch type: L-shaped type							
				<table border="1"> <thead> <tr> <th>Bore size</th> <th>Fitting O.D. øD</th> </tr> </thead> <tbody> <tr> <td>ø10</td> <td>ø7.4 or less</td> </tr> <tr> <td>ø16</td> <td>ø7.9 or less</td> </tr> <tr> <td>ø20</td> <td>ø11 or less</td> </tr> </tbody> </table>	Bore size	Fitting O.D. øD	ø10	ø7.4 or less	ø16	ø7.9 or less	ø20
Bore size	Fitting O.D. øD										
ø10	ø7.4 or less										
ø16	ø7.9 or less										
ø20	ø11 or less										
			• For the lead wire straight switch, the switch and lead wire protrude from the end face on the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.								
Side mounting				• The F3PV switch projects from the end face of the head side. If this protrusion is a problem, use F2/3V or F2/3S, or mount a rail.							
				*For switch side mounting, the through hole cannot be used.							
				*For switch rail mounting, the through hole cannot be used.							
Rail mounting											


MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

Length measurement function Linear Slide Hand Double acting

LSHM-A-HP2 Series

● Operating Stroke: 4, 6, 10, 14mm



Specifications

Descriptions		LSHM-A			
LCG	Bore size mm	ø10	ø16	ø20	ø25
STM	Actuation			Double acting	
STG	Working fluid			Compressed air	
STR2	Max. working pressure MPa			0.7	
SCPD3	Min. working pressure MPa	0.2		0.1	
CMK2	Port size	M3		M5	
SCM	Operating Stroke mm	4	6	10	14
SCG	Power supply voltage			24 VDC ±10%	
SSD2	Current consumption			25 mA or less	
SMG	Display lamp			Green LED ON when power applied	
LCR	Analog output			1 V when finger closed - 5 V when open ^{*1} , Connecting load 100kΩ and over	
STG	Analog output linearity	Without correction adapter		±3% F.S. or less (ambient temperature 25°C)	
		With correction adapter		±0.5% F.S. or less (ambient temperature 25°C)	
STS	Repeatability of analog output			±0.02 mm or less	
STL		(No deformation or wear of the actuator / jig when ambient temperature is 25 ° C)			
LSH-A	Valid measured range length mm	4.5	6.5	10	14
LSH-G	Shock resistance (sensor/amplifier section)			294m/s ²	
LSH-F	Vibration resistance (sensor / amplifier section)			10 to 55Hz Compound amplitude 1.5mm X, 2 hours each in Y, Z directions	
LSHL-A	Degree of protection (sensor/amplifier section)			IEC Standard IP65	
LSHL-G	Ambient temperature, humidity			10 to 60 °C, 85% RH or less (no freezing)	
LSHL-F					
LSHM-A	Amplifier mounting position	Side	Front	Side	Front
LSHM-G				0.221	0.238
LSHM-F				0.437	0.457
LST	Weight kg	Finger OP: 1, 2, 3	0.108	0.752	0.773
LSTM		Finger OP: 4	0.120	0.226	0.243
				0.442	0.462
	Lubrication			0.782	0.803
				Not required	

Note: Refer to page 138 for the correction adapter.

*1: There is output fluctuation of 1 mV / °C.


Unit: N

Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65


*Supply pressure: 0.5 MPa, L = 20 mm, value at stroke center

LVDT displacement sensor operation principle

When exciting the primary coil (P), induced voltage is generated in the two secondary coils (S1/S2) by electromagnetic induction. When the Hand is driven, the core position changes and a difference in induced voltage occurs between S1 and S2. This difference is used to output the position of the core as electric signals.

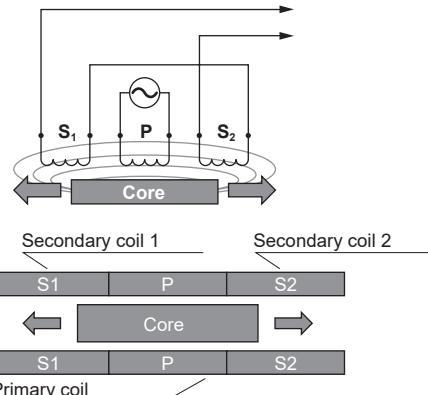

Analog output characteristics

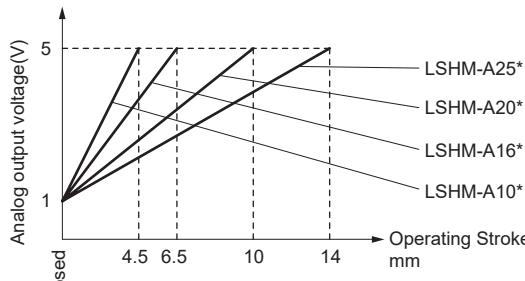

*The analog output voltage at shipment is 1 V on the closed side and 5 V on the open side, with the port closed and pressurized.

Refer to the LSHM-A Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Low-profile long stroke hand
LST
LSTM

Air Booster
ABP2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM


Compatible with rechargeable batteries
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes
SCPD3
CMK2
SCM
SSD2
STG



How to order

LSHM - A 10 D 2 A - N - HP2

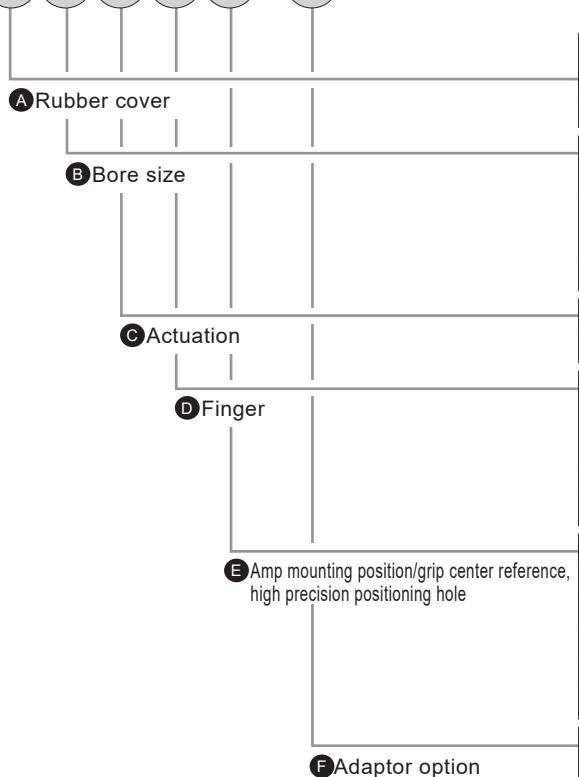


Code	Description
A Rubber cover	
A	Without rubber cover
B Bore size (mm)	
10	ø10
16	ø16
20	ø20
25	ø25
C Actuation	
D	Double acting
D Finger	* Refer to the Dimensions for details.
1	Basic
2	Side tap
3	Through hole
4	Flat
E Amp mounting position/grip center reference, high precision positioning hole*1	
A	Amp side/no positioning hole
B	Amp side/rear with finger below and piping right
C	Amp side/rear with finger below and piping left
D	Amp front/no positioning hole
E	Amp front/rear with finger below and piping right
F Adaptor option	*2
N	Without adaptor
A	Correction adapter
B	Switch output adapter (NPN)
C	Switch output adapter (PNP)
D	IO-Link adapter

*2: Shipped with the product.

*1

Amp mounting position/grip center reference, high precision positioning hole position diagram

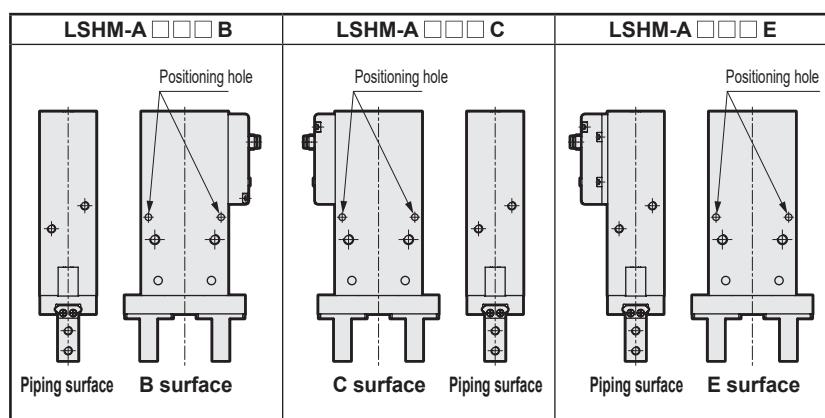

Refer to "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for details.

[Example of model No.]


LSHM-A10D2A-N-HP2

Model: Linear Slide Hand

- A**Rubber cover : Without rubber cover
- B**Bore size : ø10
- C**Actuation : Double acting
- D**Finger : Side tap
- E**Amp mounting position/grip center reference, high precision positioning hole : Amp side/no positioning hole
- F**Adaptor option : Without adaptor

Plug contact array diagram

• Without adaptor

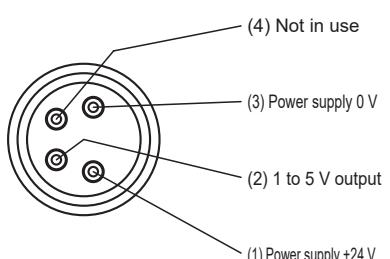


SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	



Length measurement function
with rubber cover

LSHM-G/LSHM-F-HP2 Series

● Operating Stroke: 4, 6, 10, 14 mm



Specifications

Descriptions		LSHM-G/LSHM-F			
LCG	Bore size mm	ø10	ø16	ø20	ø25
STM	Actuation			Double acting	
STG	Working fluid			Compressed air	
STR2	Max. working pressure MPa			0.7	
SCPD3	Min. working pressure MPa	0.2		0.1	
CMK2	Port size	M3		M5	
SCM	Operating Stroke mm	4	6	10	14
SCG	Power supply voltage			24 VDC ±10%	
SSD2	Current consumption			25 mA or less	
SMG	Display lamp			Green LED ON when power applied	
LCR	Analog output			1 V when finger closed - 5 V when open ^{*1} , Connecting load 100kΩ and over	
STG	Analog output linearity	Without correction adapter		±3% F.S. or less (ambient temperature 25°C)	
		With correction adapter		±0.5% F.S. or less (ambient temperature 25°C)	
STS	Repeatability of analog output			±0.02 mm or less	
STL		(No deformation or wear of the actuator / jig when ambient temperature is 25 ° C)			
LSH-A	Valid measured range length mm	4.5	6.5	10	14
LSH-G	Shock resistance (sensor/amplifier section)			294m/s ²	
LSH-F	Vibration resistance (sensor / amplifier section)			10 to 55Hz Compound amplitude 1.5mm X, 2 hours each in Y, Z directions	
LSHL-A	Degree of protection (sensor/amplifier section)			IEC Standard IP65	
LSHL-G	Ambient temperature, humidity			10 to 60 °C, 85% RH or less (no freezing)	
LSHL-F					
LSHM-A	Amplifier mounting position	Side	Front	Side	Front
LSHM-G	Weight kg	0.113	0.125	0.236	0.253
LSHM-F	Lubrication			0.462	0.482
				0.792	0.813

Note: Refer to page 138 for the correction adapter.


*1: There is output fluctuation of 1 mV / °C.

Unit: N


Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65

*Supply pressure: 0.5 MPa, L = 20 mm, value at stroke center

Gripping power

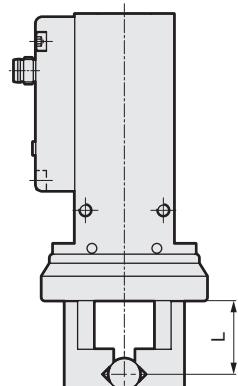


Analog output characteristics

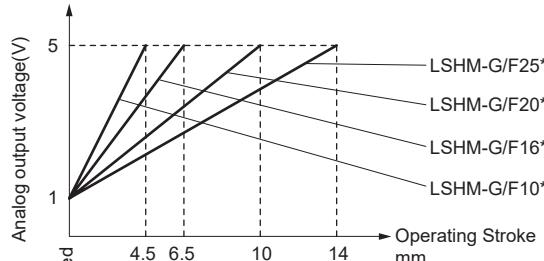

*The analog output voltage at shipment is 1 V on the closed side and 5 V on the open side, with the port closed and pressurized.

LVDT displacement sensor operation principle

When exciting the primary coil (P), induced voltage is generated in the two secondary coils (S1/S2) by electromagnetic induction. When the Hand is driven, the core position changes and a difference in induced voltage occurs between S1 and S2. This difference is used to output the position of the core as electric signals.

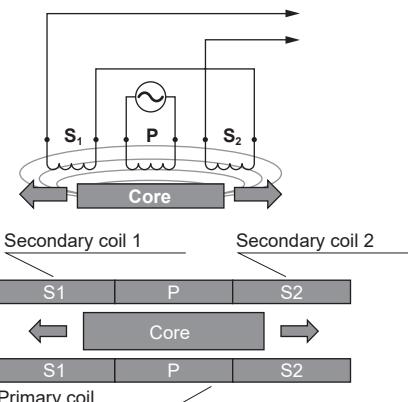

Refer to the LSHM-G/LSHM-F Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LSHM-G
LSHM-F
LSHM-A
LSHM-G
LSHM-F
LSHM-A
LSHM-G
LSHM-F

Linear Slide Hand

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Compatible with rechargeable batteries

LST
LSTM
ABP2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR

Supports food mfg. processes


SCPD3
CMK2
SCM
SSD2
STG

LSHM-G/LSHM-F-HP2 Series

How to order

How to order

LSHM - G 10 D 1 A - N - HP2

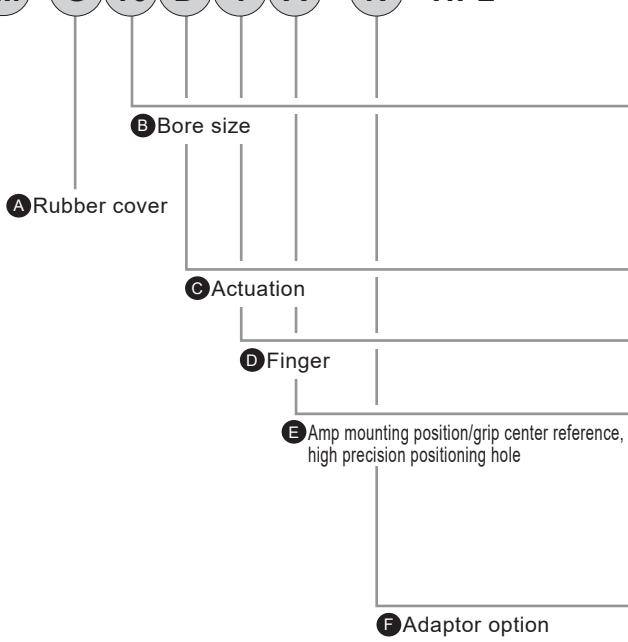


Code	Description
A Rubber cover	
G	Chloroprene rubber
F	Fluoro rubber
B Bore size (mm)	
10	ø10
16	ø16
20	ø20
25	ø25
C Actuation	
D	Double acting
D Finger	
1	Basic
E Amp mounting position/grip center reference, high precision positioning hole ^{*1}	
A	Amp side/no positioning hole
B	Amp side/rear with finger below and piping right
C	Amp side/rear with finger below and piping left
D	Amp front/no positioning hole
E	Amp front/rear with finger below and piping right
F Adaptor option	^{*2}
N	Without adaptor
A	Correction adapter
B	Switch output adapter (NPN)
C	Switch output adapter (PNP)
D	IO-Link adapter

*1: Amp mounting position/grip center reference, high precision positioning hole position diagram

*2: Shipped with the product.

*1

Amp mounting position/grip center reference, high precision positioning hole position diagram

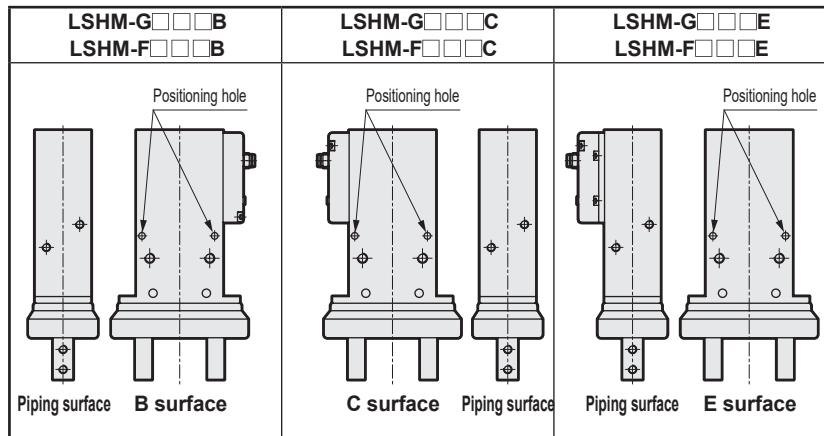

Refer to "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for details.

[Example of model No.]

LSHM-G10D1A-N-HP2

Model: Linear Slide Hand


- A** Rubber cover : Chloroprene rubber
- B** Bore size : ø10
- C** Actuation : Double acting
- D** Finger : Basic
- E** Amp mounting position/grip center reference, high precision positioning hole : Amp side/no positioning hole
- F** Correction adapter option : Without correction adapter

Consumable parts list

Bore size (mm)	Material	Kit No.	Consumable parts No.	Bore size (mm)	Material	Kit No.	Consumable parts No.
ø10	Chloroprene rubber	LSH-G10K	Rubber cover	ø20	Chloroprene rubber	LSH-G20K	Rubber cover
	Fluoro rubber	LSH-F10K			Fluoro rubber	LSH-F20K	
ø16	Chloroprene rubber	LSH-G16K	Rubber cover	ø25	Chloroprene rubber	LSH-G25K	Rubber cover
	Fluoro rubber	LSH-F16K			Fluoro rubber	LSH-F25K	

Plug contact array diagram

• Without adaptor

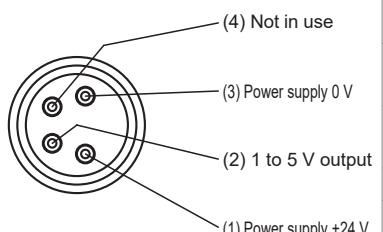

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

Correction adapter





The analog output linearity will be corrected. Please use for applications where high-accuracy linearity is required.

Specifications

Descriptions	Description
SMG	Power supply voltage 24 VDC ±10%
LCR	Current consumption 35 mA or less
LCG	Display lamp Red LED lit when power applied
STM	Analog input 1 to 5 V (LSHM Series output voltage)
STG	Analog output 1 to 5 V, connection load 50 kΩ or more
STR2	Analog output linearity ±0.5% F.S. or less (ambient temperature 25°C, LSHM Series connection, CKD provided measuring method)
SCPD3	Repeatability of analog output ±0.02 mm or less (No deformation or wear of the actuator / jig when ambient temperature is 25 ° C)
CMK2	Input connector M8 waterproof round 4-pin connector socket
SCM	Output connector M8 waterproof round 4-pin connector plug
SSD2	Shock resistance 294m/s ²
SMG	Degree of protection IEC Standard IP65
LCR	Ambient temperature, humidity 10 to 60 °C, 85% RH or less
STG	Mounting method Direct mounting
STS	Weight 40g
STL	

*Use the default combination of LSHM and correction adapter.

Dimensions

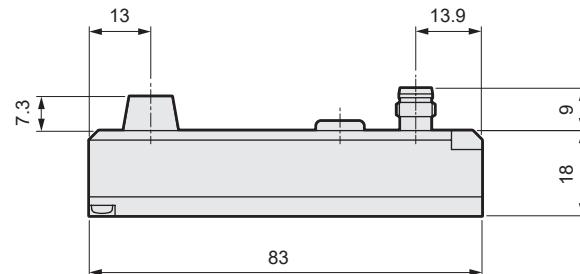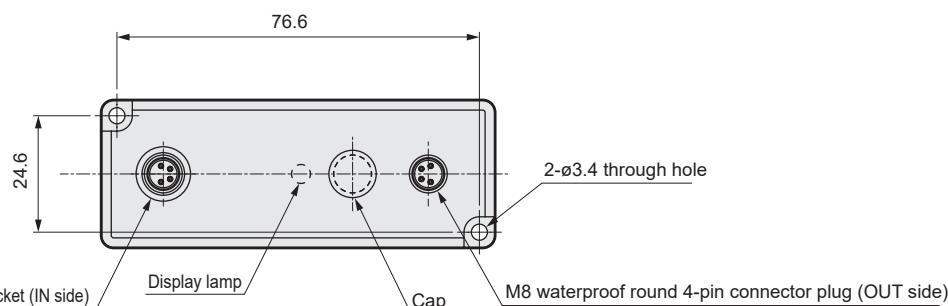

Long service life cylinder	SCPD3 CMK2 SCM SSD2 MDC2 MSD
Environment-resistant cylinder	MSDG-L SMG LCR LCG STM STG STR2
Linear Slide Hand	SCPD3 CMK2 SCM SSD2 SMG LCR Degree of protection Ambient temperature, humidity Mounting method Weight
LST	LSH-A LSH-G LSH-F
LSTM	LSH-A LSH-G LSH-F
Air Booster	ABP2
SCPD3	LSHM-A LSHM-G LSHM-F
CMK2	LSHM-A LSHM-G LSHM-F
SCM	LSHM-A LSHM-G LSHM-F
SSD2	LSHM-A LSHM-G LSHM-F
MSD	LSHM-A LSHM-G LSHM-F
MSDG-L	LSHM-A LSHM-G LSHM-F
SMG	LSHM-A LSHM-G LSHM-F
STG	LSHM-A LSHM-G LSHM-F
STM	LSHM-A LSHM-G LSHM-F
LCR	LSHM-A LSHM-G LSHM-F
LCG	LSHM-A LSHM-G LSHM-F
STR2	LSHM-A LSHM-G LSHM-F
LSH-A	LSHM-A LSHM-G LSHM-F
LSH-G	LSHM-A LSHM-G LSHM-F
LSH-F	LSHM-A LSHM-G LSHM-F
LSHL-A	LSHM-A LSHM-G LSHM-F
LSHL-G	LSHM-A LSHM-G LSHM-F
LSHL-F	LSHM-A LSHM-G LSHM-F
Supports food mfg. processes	SCPD3 CMK2 SCM SCG SSD2 STG

Switch output adapter


Specifications

Descriptions	Switch output adapter (NPN) Option code: B	Switch output adapter (PNP) Option code: C
Power supply voltage	24 VDC ±10%	
Current consumption	35 mA or less	
Power indicator lamp	Green LED ON when power applied	
Switch indicator lamp	Red Lit when LED ON	
Switch output point	3	
Switch output (per 1 ch)	NPN: Open collector Max. power supply voltage: DC24V Max. load current: 50 mA Internal voltage drop: 1.2 V or less	PNP: Open collector Max. power supply voltage: DC24V Max. load current: 50mA (*1) Internal voltage drop: 1.5 V or less
Operating range	0.2/0.5/1.0 mm (*2)	
Analog input	1 to 5 V (LSHM Series output voltage)	
Input connector	M8 connector 4-pin (socket)	
Shock resistance	294m/s ²	
Degree of protection	IEC Standards IP40	
Ambient temperature, humidity	10 to 60°C, 85% RH or less	
Mounting method	Direct mounting	
Insulation resistance	20 MΩ and over with 500 VDC megger	
Withstand voltage	No failure after 1 minute of 1,000 VAC application	
Vibration resistance	10 Hz-55Hz compound amplitude 1.5mm, X, Y, Z, 2 hours each in each direction	
Weight	65g	

*1: The total of all channels must be 100mA or less.

*2: There is a hysteresis of 0.04mm on one side.

Dimensions

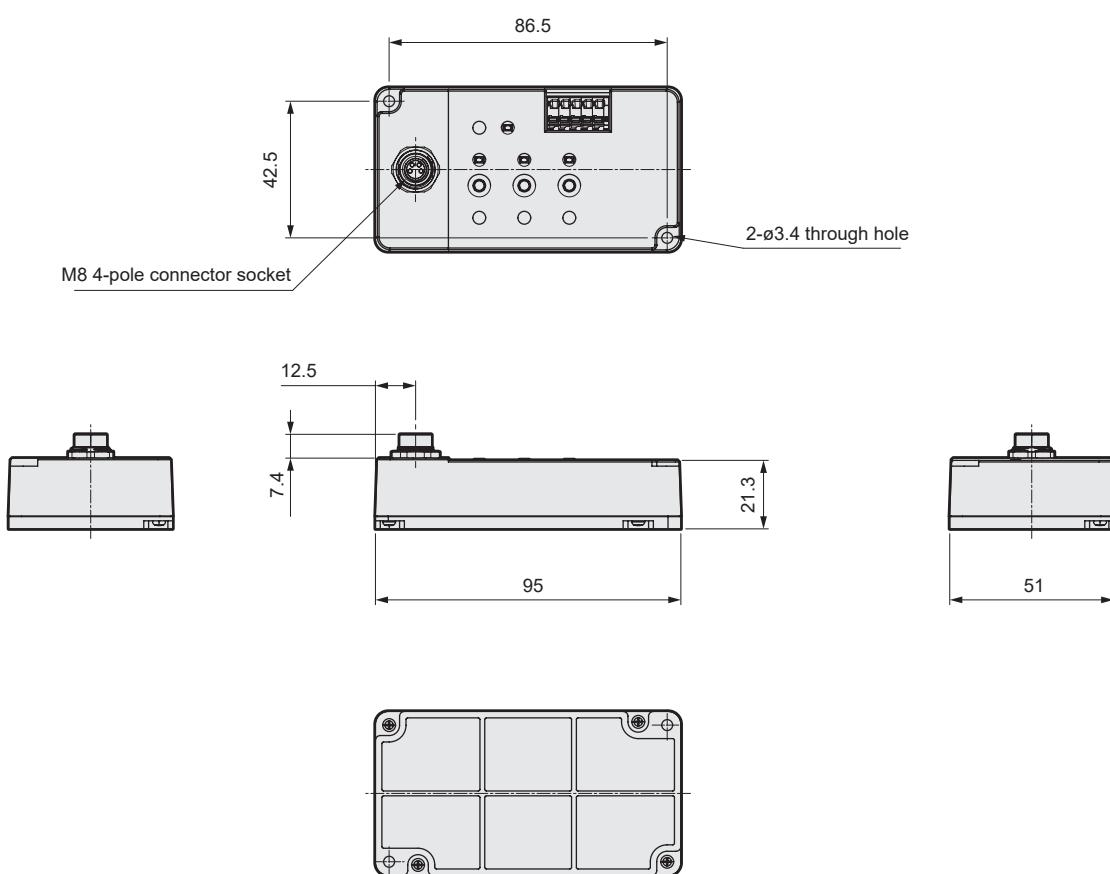

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	






LSHM-HP2 Series

IO-Link adapter

Specifications

	Descriptions	Description
SCPD3	Power supply voltage	24 VDC ±10%
CMK2	Current consumption	35 mA or less
SCM	Display lamp	Green LED ON when power applied
SSD2	Analog input	1 to 5 V (LSHM Series output voltage)
MDC2	Input connector	M8 connector 4-pin (socket)
MSD	Output connector	M12 connector 4-pin (plug)
MSDG-L	nonlinearity	±0.5% F.S. or less (ambient temperature 25°C, LSHM Series connection, CKD provided measuring method)
SMG	Insulation resistance	20 MΩ and over with 500 VDC megger
LCR	Withstand voltage	No failure after 1 minute of 1,000 VAC application
LCG	Shock resistance	294m/s ²
STM	Degree of protection	IEC Standards IP40
STG	Ambient temperature, humidity	10 to 60°C, 85% RH or less
STR2	Mounting method	Direct mounting
STS	Vibration resistance	10 Hz-55Hz compound amplitude 1.5mm, X, Y, Z, 2 hours each in each direction
STL	Weight	70g

Dimensions

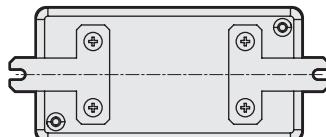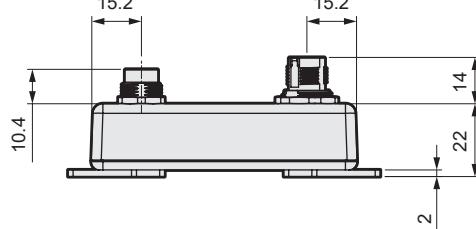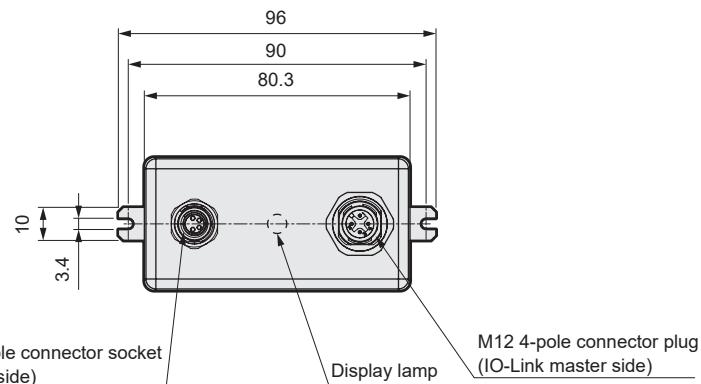

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

HP1 HP2 Series Low-profile long stroke hand



CONTENTS

● HP1 Series

Low-profile long stroke hand (LST-HP1) 144

● HP2 Series

With length measuring function/thin long stroke hand (LSTM-HP2) 146

Precautions for use 222

Low-profile long stroke hand series variation

Model No.	Bore size (mm)	Stroke (mm)
LST-HP1	ø8×2/ø12×2/ø16×2/ø20×2	8/16/32, 12/24/48, 16/32/64, 20/40/80
LSTM-HP2	ø12×2/ø16×2/ø20×2	12/16/20

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Low-profile long stroke hand Double acting

LST-HP1 Series

- Operational Stroke: Short Stroke: 8, 12, 16, 20mm
Middle stroke: 16, 24, 32, 40mm
Long stroke: 32, 48, 64, 80mm

Double acting



Specifications


Item	LST-08			LST-12			LST-16			LST-20		
	A	B	C	A	B	C	A	B	C	A	B	C
STG	Bore size mm	ø8 x 2		ø12 x 2			ø16 x 2			ø20 x 2		
STR2	Actuation						Double acting					
SCPD3	Working fluid						Compressed air					
CMK2	Max. working pressure MPa						0.7					
SCM	Min. working pressure MPa	0.15					0.1					
SSD2	Ambient temperature °C						-10 to 60 (no freezing)					
SMG	Port size	M3					M5					
LCR	Operating Stroke mm	8	16	32	12	24	48	16	32	64	20	40
STG	Repeatability mm						±0.03					
STS	Weight kg	0.09	0.12	0.16	0.19	0.24	0.34	0.42	0.54	0.79	0.78	1.03
STL	Lubrication						Not required					

Gripping power

- Gripping power is the thrust (one finger) in the direction of the arrow shown in the figure.

Unit: N

- Open direction (←)
- Close direction (→)

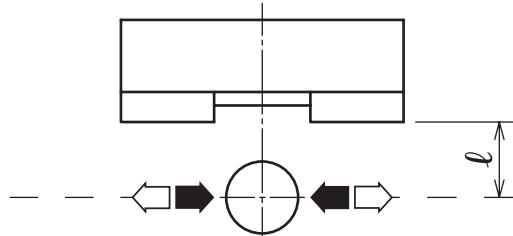

Bore size (mm)	Double acting
ø8	19
ø12	48
ø16	90
ø20	141

* Supply pressure 0.5MPa, ℓ=15mm, Value in center of stroke

Switch specifications

Item	Proximity 2-wire	Proximity 3-wire	Proximity 2-wire	Proximity 3-wire			
	F2S	F3S	F2H/F2V	F3H/F3V	F3PH/F3PV		
Applications	Programmable Controller dedicated	Programmable For controller, relay	Programmable Controller dedicated	Programmable For controller, relay			
Output method	-	NPN output	-	NPN output	PNP output		
Power supply voltage	-	10 to 28 VDC	-	10 to 28 VDC	4.5 to 28 VDC		
Load voltage/ current	10 to 30 VDC 5 to 20mA	30 VDC or less 50 mA or less	10 to 30 VDC 5 to 20mA	30 VDC or less 50 mA or less			
Display lamp	Red LED (Lit when ON)		Yellow LED (Lit when ON)				
Leakage current	1 mA or less	10 µA or less	1 mA or less	10 µA or less			
Shock resistance	980m/s ²						
Weight g	1 m: 10 3 m: 29						

*1: The F type switch uses a bend-resistant lead wire as standard.

Refer to the LST-HP1 Series of "Low-profile long Stroke Hand LST-HP Series (No.CC-1529A)" for dimensions.

How to order

Without switch (built-in magnet for switch)

LST - **08** **A** **1** **N** ————— **HP1**

With switch (built-in magnet for switch)

LST - **08** **A** **1** **N** - **F2H** - **D** - **HP1**

A Bore size (mm)



B Stroke



C Port position



D High precision positioning hole



E Switch model No.

F Switch quantity

Code	Description
A Bore size (mm)	
08	ø8
12	ø12
16	ø16
20	ø20

B Stroke

A	Short Stroke
B	Middle stroke
C	Long stroke

C Port position

1	Standard, axis direction
2	Side piping

D High precision positioning hole

N	None
A	Yes

E Switch model No.

Lead wire Straight type	Lead wire L-shaped type	Unit	Voltage AC	Voltage DC	Display	Lead wire
-	F2S*			●		2-wire
-	F3S*			●		3-wire
F2H*	F2V*			●		2-wire
F3H*	F3V*			●		3-wire
F3PH*	F3PV*			●		3-wire

* Lead wire length

Blank	1 m (standard)
3	3 m (option)

F Switch quantity

R	1 on open side
H	1 on closed side
D	2

How to order switch

SW - **F2H***

Switch model No.
(Item **E** above)


[Example of model No.]

LST-16B2A-F2H3-D-HP1

Model: Low-profile long stroke hand

- A** Bore size (mm) : ø16
- B** Stroke : Middle stroke
- C** Port position : Side piping
- D** High precision positioning hole : Yes
- E** Switch model No. : Proximity F2H, lead wire 3 m
- F** Switch quantity : 2

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STR2	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

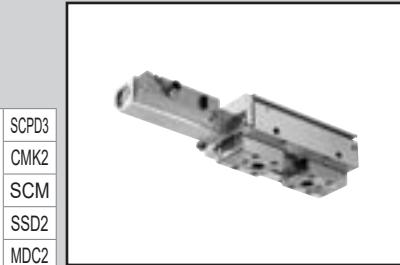

Low-profile long stroke hand with length measuring function, double acting

LSTM-HP2 Series

● Operating Stroke: 12, 16, 20 mm

Double acting



Specifications


	Item	LSTM		
LCR	Bore size mm	ø12 x 2	ø16 x 2	ø20 x 2
LCG	Actuation	Double acting		
STM	Working fluid	Compressed air		
STG	Max. working pressure MPa	0.7		
STR2	Min. working pressure MPa	0.1		
SCPD3	Port size	M5		
CMK2	Operating Stroke mm	12	16	20
SCM	Power supply voltage	24 VDC ±10%		
SSD2	Current consumption	25 mA or less		
SMG	Display lamp	Green LED ON when power applied		
LCR	Analog output	1 V when finger is closed - 5V*1 when open, connection load 100kΩ or more		
STG	Analog output linearity	±0.5% F.S. or less (ambient temperature 25°C)		
STS	Repeatability of analog output	±0.04 mm or less (No deformation or wear of the actuator / jig when ambient temperature is 25 ° C)		
STL	Valid measured range length mm	12	16	20
LSH-A	Shock resistance (sensor/amplifier section)	294m/s ²		
LSH-G	Vibration resistance (sensor / amplifier section)	10 to 55Hz double amplitude 1.5mm, 2 hours in each X, Y, Z direction		
LSH-L	Degree of protection (sensor/amplifier section)	IEC Standard IP65		
LSH-A	Ambient temperature, humidity	10 to 60°C, 85% RH or less (no freezing)		
LSH-G	Weight kg	0.26	0.50	0.90
LSH-F	Lubrication	Not required		

*1: There is output fluctuation of 1 mV / °C.


Gripping power

- Gripping power is the thrust (one finger) in the direction of the arrow shown in the figure.

- Open direction (←)
- Close direction (→)

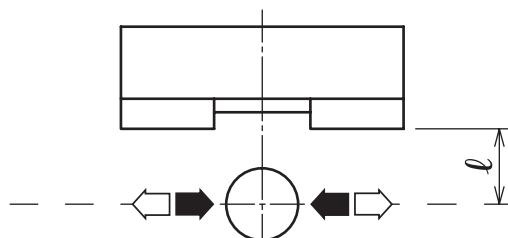

Analog output characteristics

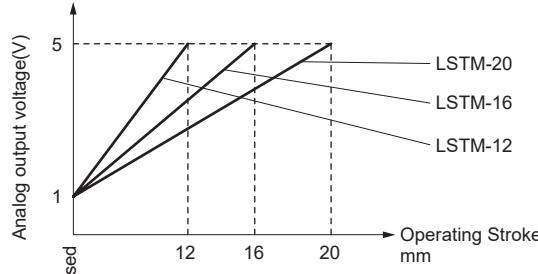


*The analog output voltage at shipment is 1 V on the closed side and 5 V on the open side, with the port closed and pressurized.

Bore size (mm)	Double acting
ø12	48
ø16	90
ø20	141

*Supply pressure: 0.5 MPa, L = 15 mm, value at stroke center

LVDT displacement sensor operation principle

When exciting the primary coil (P), induced voltage is generated in the two secondary coils (S1/S2) by electromagnetic induction. When the Hand is driven, the core position changes and a difference in induced voltage occurs between S1 and S2. This difference is used to output the position of the core as electric signals.

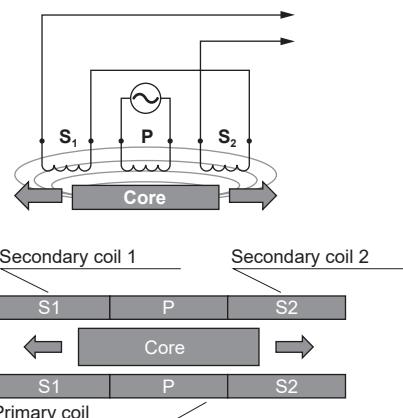

How to order

LSTM - 12 A 1 N - HP2

A Bore size (mm)


B Stroke

C Port position

D High precision positioning hole

Code	Description
A Bore size (mm)	
12	ø12
16	ø16
20	ø20
B Stroke	
A	Short Stroke
C Port position	
1	Standard, axis direction
D High precision positioning hole	
N	None
A	Yes

Plug contact array diagram

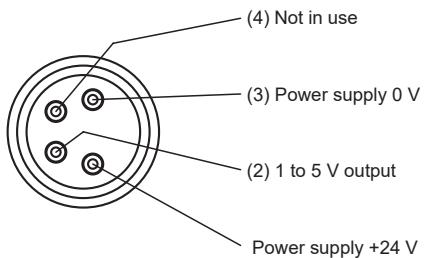

[Example of model No.]

LSTM-16A1A-HP2


Model: Low-profile long stroke hand with length measuring function

- A** Bore size (mm) : ø16
- B** Stroke : Short Stroke
- C** Port position : Standard, axis direction
- D** High precision positioning hole : Yes

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

HP1 Series

Air booster

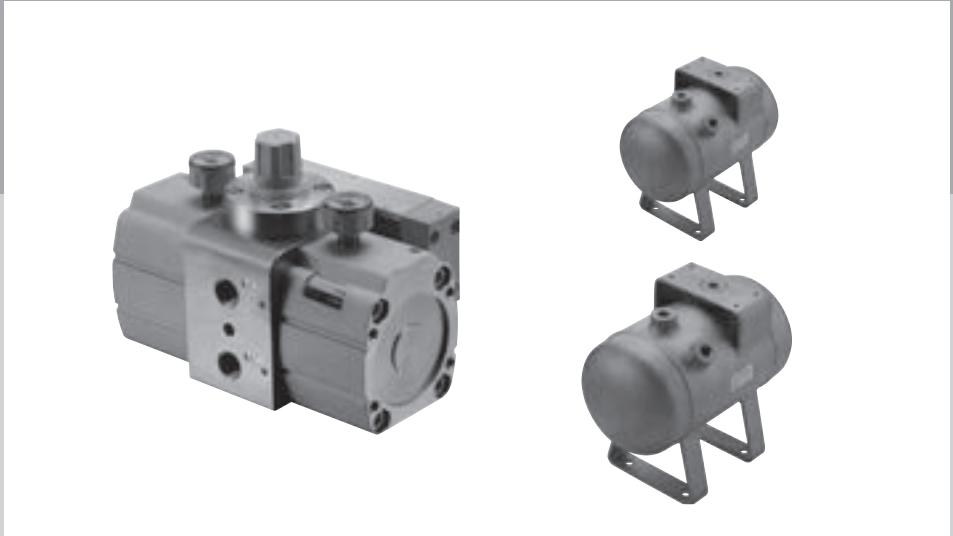

CONTENTS


● Air booster (ABP2-HP1)	150
● Air tank (AT2)	152
⚠ Precautions for use	222

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Air booster(Air booster) ABP2-HP1 Series

JISCode




Specifications

Descriptions		ABP2-HP1
Working fluid		Compressed air
Max. working pressure MPa		0.99
Min. working pressure MPa		0.2
Set pressure MPa	From a primary pressure of + 0.1MPa to twice the primary pressure (max.0.99 MPa)	
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		
SSD2		
MSD		
MSDG-L		
SMG		
LCR		
LCG		
STM		
STG		
STR2		
SCPD3		
CMK2		
SCM		

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
MSD	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	Compatible with rechargeable batteries
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

Flow characteristics (Air tank 5L, at twice the pressure)

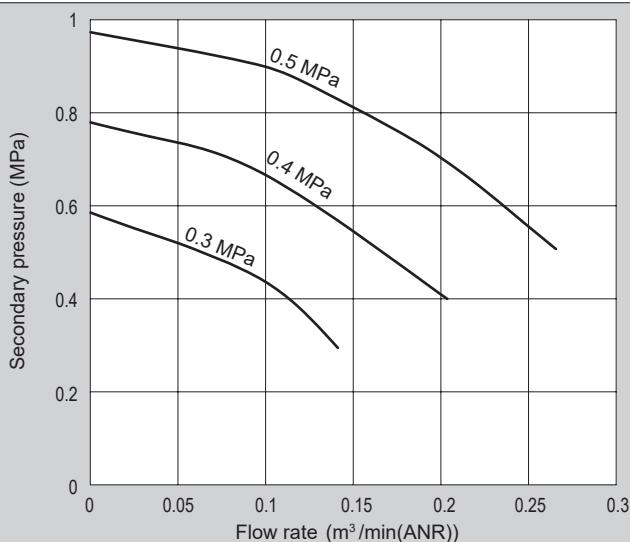


Fluid characteristics show max. flow rate of air booster. If primary pressure is constant and secondary side flow rate is increased, max. secondary pressure decreases.

Note) Air booster needs approx. twice secondary side flow rate (max.) for primary side due to structure.

Confirm that the instantaneous flow rate is within the curve.

Filling characteristics (when the boosting ratio is equivalent to 2 times)

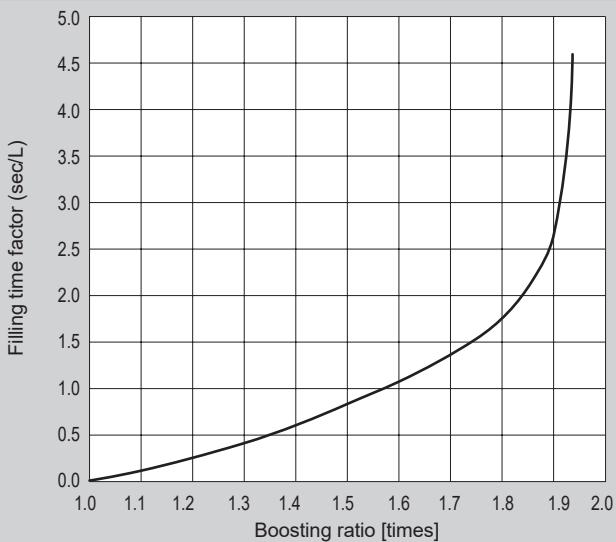


Filling characteristics show relations between boosting ratio and filling time, if tank etc., filled with compressed air.

The time required to fill the tank with air can be calculated as follows. With the primary side pressure P_0 , inner tank pressure before filling P_1 , inner tank pressure after filling P_2 , pre-filling ratio between primary side pressure and inner tank pressure k_1 , and post-filling ratio between primary side pressure and inner tank pressure k_2 , the formula will be $k_1 = \frac{P_1}{P_0}$, $k_2 = \frac{P_2}{P_0}$. Calculate k_1 and k_2 , find the filling time factors t_1 and t_2 at the boosting ratio points k_1 and k_2 in the graph and substitute the values into $t = (t_2 - t_1) A$ to obtain the filling time t of the tank capacity A (L).


Pressure characteristics

(Setting: Primary pressure: 0.7MPa Secondary pressure: 0.99MPa Flow rate: 0.02m³/min (ANR))

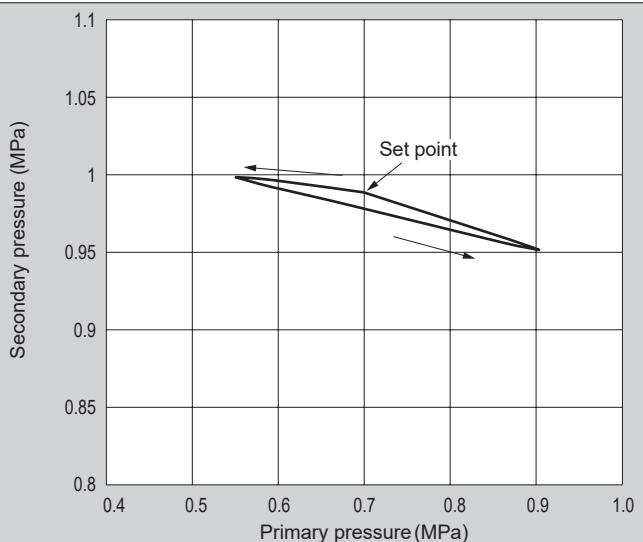

Pressure characteristics show variation of set secondary pressure according to primary pressure variation.

Pulsation

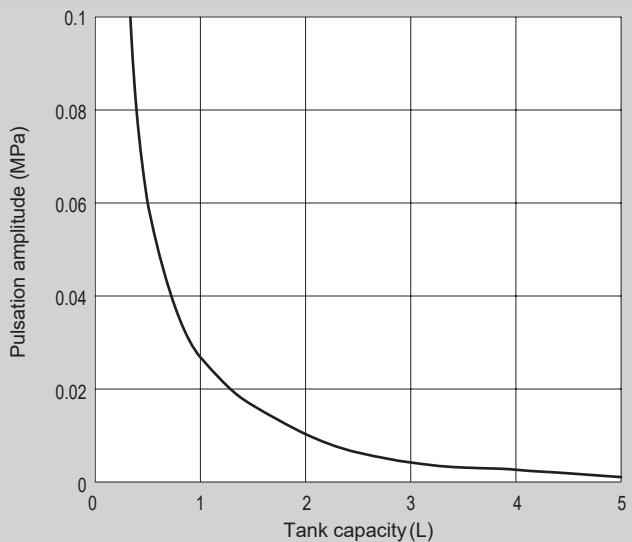

Pulsation shows width of pulsation if air tank is installed onto secondary side of air booster.

Formula for air booster operational cycle

$$N = \frac{Q \times 10^3}{0.95P + 0.096} \quad \begin{array}{l} N: \text{Operational cycle} \\ Q: \text{Required flow rate (m}^3/\text{min(ANR)} \end{array}$$


P: Primary pressure (MPa)

Formula for air booster service life

Since the nominal life of the operation cycle is 10 million cycles

$$T = \frac{10,000,000}{N \times 60} \quad \begin{array}{l} T: \text{Service life (Time)} \end{array}$$


The characteristics above are typical examples, not guaranteed values.

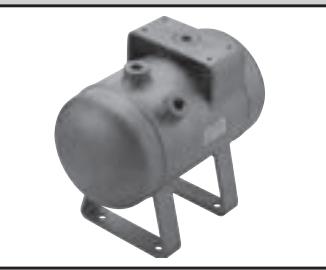

Air tank(Related products)

AT2 Series

JISCode



Specifications

Descriptions	AT2-05S	AT2-10S
LCG		Compressed air
STM		
STG	Max. working pressure MPa	0.99
STR2	Water test pressure MPa	1.5
SCPD3		
CMK2	Ambient temperature °C	0 to 50 (no freezing)
SCM		
SCG	Internal capacity L	5
SSD2	Port size	Rc3/8
SMG		
LCR	Material	Stainless steel
STG	Weight kg	7.3
STS		10.5
STL		

How to order

AT2 - 10 S

A Internal capacity

Code	Description
A Internal capacity	
05	5L
10	10L

Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries

Supports food mfg. processes

Refer to AT2 of "Air booster ABP2-HP1 Series (No.CC-1533A)" for dimensions.

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	Compatible with rechargeable batteries
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	

SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	

LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LST	
LSTM	
ABP2	

SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LST	
LSTM	
ABP2	

HP1 Series

Components for rechargeable battery production



CONTENTS

● Long service life cylinder	Pencil shaped cylinder (SCPD3-P4/P40-HP1)	158
	Small bore size cylinder (CMK2-P4/P40-HP1)	160
	Round shaped cylinder (SCM-P4/P40-HP1)	162
	Compact cylinder (SSD2-P4/P40-HP1)	164
	Small compact cylinder (MSD-P4/P40-HP1)	166
	Small guided compact cylinder (MSDG-L-P4/P40-HP1)	168
	Compact cylinder (SMG-P4/P40-HP1)	170
	Guided cylinder (STG-P4/P40-HP1)	172
	Guided cylinder (STM-P4/P40-HP1)	174
	Linear slide cylinder (LCR-P4/P40-HP1)	176
	Linear slide cylinder (LCG-P4/P40-HP1)	180
	Twin rod cylinder (STR2-P4/P40-HP1)	184
● Linear Slide Hand	Double acting/single acting without rubber cover (LSH-A-P4/P40-HP1)	186
	Double acting/single acting with rubber cover (LSH-G/LSH-F-P4/P40-HP1)	188
	Double acting/single acting long Stroke without rubber cover (LSHL-A-P4/P40-HP1)	190
	Double acting long Stroke with rubber cover (LSHL-G/LSHL-F-P4/P40-HP1)	192
● Cylinder switch	Refer to the "Switch compatibility table" and order using the listed order model No.	198
⚠ Precautions for use		222

Long service life cylinder series variation

Model No.	Bore size (mm)	Stroke (mm)
SCPD3-P4/P40-HP1	ø6/ø10/ø16	5 to 150
CMK2-P4/P40-HP1	ø20/ø25/ø32/ø40	5 to 150
SCM-P4/P40-HP1	ø20/ø25/ø32/ø40	10 to 150
SSD2-P4/P40-HP1	ø12/ø16/ø20/ø25/ø32/ø40	1 to 100
MSD-P4/P40-HP1	ø6/ø8	5/10/15/20/25/30
MSDG-L-P4/P40-HP1	ø6/ø8/ø12/ø16	5/10/15/20/25/30
SMG-P4/P40-HP1	ø6/ø10/ø16/ø20/ø25/ø32	5 to 100
LCR-P4/P40-HP1	ø6/ø8/ø12/ø16/ø20/ø25	10/20/30/40/50/75/100/125/150
LCG-P4/P40-HP1	ø6/ø8/ø12/ø16/ø20/ø25	10/20/30/40/50/75/100/125/150
STM-P4/P40-HP1	ø6/ø10	5/10/15/20
STG-P4/P40-HP1	ø12/ø16/ø20/ø25/ø32/ø40	5 to 150
STR2-P4/P40-HP1	ø6/ø10/ø16/ø20/ø25/ø32	5 to 150

Linear slide hand system table

Model No.	Bore size (mm)	Stroke (mm)
LSH-A-P4/P40-HP1	ø6/ø10/ø16/ø20/ø25/ø32	4/4/6/10/14/22
LSH-G/LSH-F-P4/P40-HP1	ø6/ø10/ø16/ø20/ø25/ø32	4/4/6/10/14/22
LSHL-A-P4/P40-HP1	ø10/ø16/ø20/ø25	8/12/18/22
LSHL-G/LSHL-F-P4/P40-HP1	ø10/ø16/ø20	8/12/18

⚠ Read the safety precautions in "Pneumatic Cylinders" (Catalog No.CB-029SA and CB-030SA) before use.

⚠ CAUTION

- Some models use oil-impregnated bearings, and oil may be discharged outside of the cylinder.
Do not use in places susceptible to oil.

CKD

For the rechargeable battery manufacturing process, reduction of CO₂

Make Progress!! P4 Series

With the progress of rechargeable and next-generation battery development, we have responded to the demand for components with improved dry environmental performance. Our products are compatible with the production stability of the manufacturing process and consistently meet the needs of rechargeable battery manufacturing, from electrode production to packaging.

Material restrictions



Restrict materials for component parts.

Restricts the use of materials and surface treatments inappropriate for the rechargeable battery manufacturing process.



Dry environment



Long service life even in -70°C dew point environments


Adopted grease compatible with ultra-dry environments. Retains the smooth operation of the sliding part for long periods, even in dry environments.

Stable operation



Contributing to a system that never stops

Uses a special grease that supports low dew points and high frequency use. Contributes to stable operation of equipment.

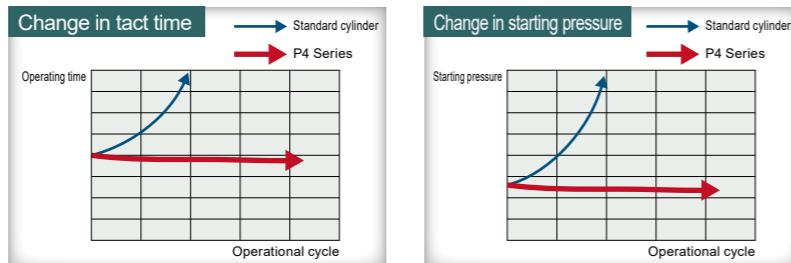

Emissions reduction in the rechargeable battery manufacturing process

Longer service life in environments with -70°C dew point. Contributes to reduced CO₂ emissions

By optimizing packing design and seal functions, and adopting high-frequency compliant grease suitable for ultra-low dew point environments, we have achieved a long service life with the same dimensions as those of the P4 Series.

Propose stable operation for long periods with CKD's proprietary sliding technology



Realizes long-term stable operation in the rechargeable battery manufacturing process

P4 SERIES



Rechargeable battery compatible long service life cylinder


P4-HP1 Series

Unexplained significantly reduced Number of replacements significantly reduced Durability 10 million cycles or more
Subject to CKD prescribed conditions

Further Progress!! P4-HP1 Series



Long service life cylinder

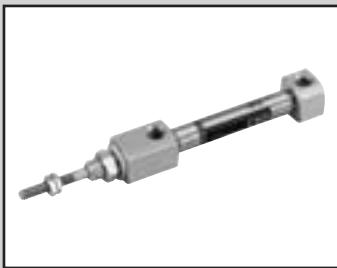

Pencil shaped cylinder Double acting/single rod

SCPD3-P4/P40-HP1 Series

●Bore size: ø6/ø10/ø16

JISCode



Specifications

	SCPD3-P4/P40-HP1			
	SCPD3-L-P4/P40-HP1 (with switch)			
LCR	Bore size mm	ø6	ø10	
LCG			ø16	
STM	Actuation	Double acting		
STG	Working fluid	Compressed air		
STR2	Max. working pressure MPa	1.0		
SCPD3	Min. working pressure MPa	0.15	0.1	
CMK2	Proof pressure MPa	1.6		
SCM	Ambient temperature °C	-10 to 60 (no freezing)		
SSD2	Port size	M5		
SCG	Stroke tolerance mm	+1.0 0		
SMG	Working piston speed mm/s	50 to 750		
LCR	Cushion	Rubber cushion		
STG	Lubrication	Not available		
STS	Allowable absorbed energy J	0.012	0.041	
STL			0.162	

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
ø6	15/30/45/60	100	5
ø10		150	
ø16		150	

Note: The custom Stroke is available in 1mm increments.

How to order switch mounting bracket

P4	SCPD3-T-[Bore size]
P40	SCPD3-T-[Bore size]-P40

How to order mounting bracket P4

Bore size (mm)	ø6	ø10	ø16
Mounting bracket			
Foot (LS)	P2-LS-6	P2-LS-10	P2-LS-16
Flange (FA)	P2-FA-6	P2-FA-10	P2-FA-16

Note: The foot (LS) type mounting bracket is provided as 1 pc./set.

How to order mounting bracket P40

Bore size (mm)	ø6	ø10	ø16
Mounting bracket			
Foot (LS)	P2-LS-6-P40	P2-LS-10-P40	P2-LS-16-P40
Flange (FA)	P2-FA-6-P40	P2-FA-10-P40	P2-FA-16-P40

Note: The foot (LS) type mounting bracket is provided as 1 pc./set.

Refer to the SCPD3 Series in "Pneumatic Cylinders I (No. CB-029SA)" for dimensions.

SCPD3-P4/P40-HP1 Series

How to order

How to order

Without switch (without magnet for switch) *5

SCPD3 - 00 - 10 - 15 - O - P40 Y - HP1

With switch (built-in magnet for switch)

SCPD3-L - 00 - 10 - 15 - O - SW11 - R - P40 Y - HP1

A Model No.

B Mounting
*1

C Bore size

D Stroke

E Head side port direction
*1

F Switch model No.
*2, *4

G Switch quantity

H Accessory
*3

Code	Description
A Model No.	
SCPD3	Double acting
SCPD3-L	Double acting/with switch

B Mounting

Bore size (\varnothing)		6	10	16
00	Basic	●	●	●
LS	Axial foot (one side) (rod side)	●	●	●
FA	Rod side flange	●	●	●
CB	Clevis bracket (pin and snap ring attached)	●	●	●

C Bore size (mm)

6	$\varnothing 6$
10	$\varnothing 10$
16	$\varnothing 16$

D Stroke (mm)

Bore size	Stroke	Custom Stroke
$\varnothing 6$	5 to 100	In 1 mm increments
$\varnothing 10$	5 to 150	
$\varnothing 16$	5 to 150	

E Head side port direction

Blank	Vertical
O	Axial direction

F Switch model No.

Refer to the switch model No.
Refer to the compatibility table on pages 198 to 201.

G Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

H Accessory

Bore size (\varnothing)		6	10	16
I	Rod eye	●	●	●
Y	Rod clevis (pin and snap ring attached)	●	●	●
B1	Eye bracket	●	●	●
B2	Clevis bracket	●	●	●



Precautions for model No. selection

*1: "CB" mounting is not available when the port direction is "O" (axial direction).

*2: Magnet is not built into the type without switch.

*3: "I" and "Y" cannot be selected together.

*4: Switches are shipped with the product.

*5: When without switch, supports P4 specifications with HP1


Related products

Speed controller				
Model No.	Appearance	Port size	Compatible tube O.D.	
		(Rc or R)	M5	4 ($\varnothing 4$)
SC3W-M5-*P4		●	●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service life cylinder

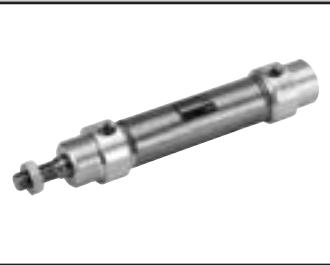

Small bore size cylinder Double acting/single rod

CMK2-P4/P40-HP1 Series

●Bore size:ø20/ø25/ø32/ø40

JISCode



Specifications

Descriptions	CMK2-P4/P40-HP1				
LCG	Bore size mm	ø20	ø25	ø32	ø40
STM	Actuation	Double acting			
STG	Working fluid	Compressed air			
STR2	Max. working pressure MPa		1.0		
SCPD3	Min. working pressure MPa		0.1		
CMK2	Proof pressure MPa		1.6		
SCM	Ambient temperature °C	-10 to 60 (no freezing)			
SCG	Port size	Rc1/8			
SSD2	Stroke tolerance mm	+2/-0 (up to 150)			
SMG	Working piston speed mm/s	50 to 500			
LCR	Cushion	Rubber cushion			
STG	Lubrication	Not available			
STS	Allowable absorbed energy J	0.166	0.308	0.424	0.639
STL					

Stroke

Bore size(mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
ø20			
ø25	25/50/75/		
ø32	100/150	150	
ø40			5

*1: The custom Stroke is available in 1 mm increments.

*2: One side foot (LS) is the max. Stroke of 50mm.

How to order switch mounting bracket

P4	CMK2-T-[Bore size]
P40	CMK2-T-[Bore size]-P40

How to order mounting bracket P4

Bore size (mm)	ø20	ø25	ø32	ø40
Mounting bracket				
Axial foot (LB/LS)	M1-LB-20	M1-LB-30	M1-LB-30	M1-LB-30
Flange (FA/FB)	M1-FA-20	M1-FA-30	M1-FA-30	M1-FA-30
Trunnion (TA/TB)	M1-TA-20	M1-TA-30	M1-TA-30	M1-TA-40
Eye bracket (CA)	M1-CA-20	M1-CA-30	M1-CA-30	M1-CA-30
Clevis bracket (CB)	M1-CB-20	M1-CB-30	M1-CB-30	M1-CB-30

*1: Regarding mounting brackets, mounting nuts and toothed washers are attached with the axial foot type and flange type. Trunnions are supplied with mounting nuts.

*2: For axial foot types (two-sided), 2 sets of "M1-LB0** or [Bore size]" in the table above are required.

LCR

How to order mounting bracket P40

Bore size (mm)	ø20	ø25	ø32	ø40
Mounting bracket				
Axial foot (LB/LS)	M1-LB-20-P40	M1-LB-25-P40	M1-LB-30-P40	M1-LB-30-P40
Flange (FA/FB)	M1-FA-20-P40	M1-FA-25-P40	M1-FA-30-P40	M1-FA-30-P40
Trunnion (TA/TB)	M1-TA-20-P40	M1-TA-25-P40	M1-TA-30-P40	M1-TA-30-P40
Eye bracket (CA)	M1-CA-20-P40	M1-CA-25-P40	M1-CA-30-P40	M1-CA-30-P40
Clevis bracket (CB)	M1-CB-20-P40	M1-CB-25-P40	M1-CB-30-P40	M1-CB-30-P40

*1: For axial foot types (two-sided), 2 sets of "M1-LB-** or [Bore size]-P40" in the table above are required.

*2: Regarding mounting brackets, mounting nuts are attached with the axial foot type, flange type and trunnion type.

Refer to the CMK2 Series in "Pneumatic Cylinders I (No. CB-029SA)" for dimensions.

CKD

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD

MSDG-L

SMG

Environment-resistant cylinder

LSH-A
LSH-G
LSH-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

Linear Slide Hand

LST

LSTM

Low-profile long stroke hand

ABP2

Air Booster

SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCM

SCG

SSD2

STG

Supports food mfg. processes

Compatible with rechargeable batteries

CMK2-P4/P40-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)

CMK2 - 00 - 20 - 100 - P4/P40 - Y - HP1

With switch (built-in magnet for switch)

CMK2 - 00 - 20 - 100 - SW11 - R - M - P4/P40 - Y - HP1

A Mounting
*1

B Bore size

C Stroke

D Switch model No.

E Switch quantity
*4

F Option

G Accessory
*2

Code	Description
A Mounting	
00	Basic
LB	Axial foot (both sides)
LS	Axial foot (one side)
FA	Rod side flange
FB	Head side flange
CA	Eye bracket
CC	Eye bracket integrated
CB	Clevis Bracket (pin and split washer pin included)
TA	Rod side trunnion
TB	Head side trunnion
B Bore size (mm)	
20	ø20
25	ø25
32	ø32
40	ø40
C Stroke (mm)	
Bore size	Stroke
ø20	5 to 150
ø25	5 to 150
ø32	5 to 150
ø40	5 to 150
D Switch model No.	
Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.	
E Switch quantity	
R	1 on rod side
H	1 on head side
D	2
T	3
F Option	
M	Piston rod, rod nut material (stainless steel) *5
G Accessory	
I	Rod eye
Y	Rod clevis (pin and split washer pin attached)
B2	Clevis bracket (pin and snap ring included)

Precautions for model No. selection

*1: One side foot (LS) has the max. stroke length of 50mm.

*2: "I" and "Y" cannot be selected together.

*3: Made-to-order specifications of rod end form refer to "Pneumatic Cylinders I (Catalog No.CB-029SA)".

*4: Up to three switches can be installed. If four or more switches are required, switch mounting brackets for the extra switches must be prepared separately.

*5: For 20 or 25 bore size, the rod material is stainless steel as standard and the rod nut is zinc chromate. If a stainless steel rod nut is necessary, select the "M" option code.

Related products

Speed controller		Port size (Rc or R)	Compatible tube O.D.		
Model No.	Appearance		4(ø4)	6(ø6)	8(ø8)
SC3W-6-*P4		●	●	●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Round shaped cylinder Double acting/single rod

SCM-P4/P40-HP1 Series

●Bore size:ø20/ø25/ø32/ø40

JISCode



Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Compatible with rechargeable batteries

Supports food mfg. processes

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Specifications

Item	SCM-P4/P40-HP1							
LCG	Bore size mm	ø20	ø25	ø32	ø40			
STM	Actuation	Double acting						
STG	Working fluid	Compressed air						
STR2	Max. working pressure MPa	1.0						
SCPD3	Min. working pressure MPa	0.1						
CMK2	Proof pressure MPa	1.6						
SCM	Ambient temperature °C	-10 to 60 (no freezing)						
SCG	Port size	Rc1/8						
SSD2	With rubber cushion	M5						
SMG	With air cushion	Rc1/8						
LCR	Stroke tolerance mm	+1.4 0	(up to 150)					
LCR	Working piston speed mm/s	30 to 1000 (Operate within the allowable absorbed energy.)						
LCR	Cushion	Either rubber cushion or air cushion can be selected.						
STG	Effective air cushion length mm	8.1	8.1	8.6	8.6			
STS	Lubrication	Not available						
STL	Allowable absorbed energy J	With rubber cushion With air cushion	0.1 0.8	0.2 1.2	0.5 2.5	0.9 3.7		
LSH-A								
LSH-G								
LSH-F								
LSHL-A								
LSHL-G								
LSHL-F								
LSHM-A	Bore size (mm)	ø 20	Standard Stroke (mm)	25, 50, 75, 100, 125, 150	Min. Stroke (mm)			
LSHM-G		ø25			10			
LSHM-F		ø32						
		ø40						

*1: The custom Stroke is available in 1 mm increments.

How to order mounting bracket P4

Bore size (mm) Mounting bracket	ø20	ø25	ø32	ø40
Foot (LB)	SCM-LB-20	SCM-LB-25	SCM-LB-32	SCM-LB-40
Flange (FA/FB)	SCM-FA-20	SCM-FA-25	SCM-FA-32	SCM-FA-40
Eye bracket (CA)	SCM-CA-20	SCM-CA-25	SCM-CA-32	SCM-CA-40
Trunnion (TA/TB)	SCM-TA-20	SCM-TA-25	SCM-TA-32	SCM-TA-40

How to order mounting bracket P40

Bore size (mm) Mounting bracket	ø20	ø25	ø32	ø40
Foot (LB)	SCM-LB-20-P40	SCM-LB-25-P40	SCM-LB-32-P40	SCM-LB-40-P40
Flange (FA/FB)	SCM-FA-20-P40	SCM-FA-25-P40	SCM-FA-32-P40	SCM-FA-40-P40
Eye bracket (CA)	SCM-CA-20-P40	SCM-CA-25-P40	SCM-CA-32-P40	SCM-CA-40-P40
Trunnion (TA/TB)	SCM-TA-20-P40	SCM-TA-25-P40	SCM-TA-32-P40	SCM-TA-40-P40

*1: All mounting brackets have mounting bolts attached.

*2: The foot mounting bracket is provided as 2 pcs./set.

*3: The eye bracket mounting bolt is provided as 2 pcs./set.

*4: The trunnion mounting bolt is provided as 2 pcs./set.

*5: The flange mounting bolt is provided as 2 pcs./set.

*6: The foot mounting bolt is provided as 2 pcs./set.

*7: The eye bracket mounting bolt is provided as 2 pcs./set.

*8: The trunnion mounting bolt is provided as 2 pcs./set.

*9: The flange mounting bolt is provided as 2 pcs./set.

*10: The foot mounting bolt is provided as 2 pcs./set.

*11: The eye bracket mounting bolt is provided as 2 pcs./set.

*12: The trunnion mounting bolt is provided as 2 pcs./set.

*13: The flange mounting bolt is provided as 2 pcs./set.

*14: The foot mounting bolt is provided as 2 pcs./set.

*15: The eye bracket mounting bolt is provided as 2 pcs./set.

*16: The trunnion mounting bolt is provided as 2 pcs./set.

*17: The flange mounting bolt is provided as 2 pcs./set.

*18: The foot mounting bolt is provided as 2 pcs./set.

*19: The eye bracket mounting bolt is provided as 2 pcs./set.

*20: The trunnion mounting bolt is provided as 2 pcs./set.

*21: The flange mounting bolt is provided as 2 pcs./set.

*22: The foot mounting bolt is provided as 2 pcs./set.

*23: The eye bracket mounting bolt is provided as 2 pcs./set.

*24: The trunnion mounting bolt is provided as 2 pcs./set.

*25: The flange mounting bolt is provided as 2 pcs./set.

*26: The foot mounting bolt is provided as 2 pcs./set.

*27: The eye bracket mounting bolt is provided as 2 pcs./set.

*28: The trunnion mounting bolt is provided as 2 pcs./set.

*29: The flange mounting bolt is provided as 2 pcs./set.

*30: The foot mounting bolt is provided as 2 pcs./set.

*31: The eye bracket mounting bolt is provided as 2 pcs./set.

*32: The trunnion mounting bolt is provided as 2 pcs./set.

*33: The flange mounting bolt is provided as 2 pcs./set.

*34: The foot mounting bolt is provided as 2 pcs./set.

*35: The eye bracket mounting bolt is provided as 2 pcs./set.

*36: The trunnion mounting bolt is provided as 2 pcs./set.

*37: The flange mounting bolt is provided as 2 pcs./set.

*38: The foot mounting bolt is provided as 2 pcs./set.

*39: The eye bracket mounting bolt is provided as 2 pcs./set.

*40: The trunnion mounting bolt is provided as 2 pcs./set.

*41: The flange mounting bolt is provided as 2 pcs./set.

*42: The foot mounting bolt is provided as 2 pcs./set.

*43: The eye bracket mounting bolt is provided as 2 pcs./set.

*44: The trunnion mounting bolt is provided as 2 pcs./set.

*45: The flange mounting bolt is provided as 2 pcs./set.

*46: The foot mounting bolt is provided as 2 pcs./set.

*47: The eye bracket mounting bolt is provided as 2 pcs./set.

*48: The trunnion mounting bolt is provided as 2 pcs./set.

*49: The flange mounting bolt is provided as 2 pcs./set.

*50: The foot mounting bolt is provided as 2 pcs./set.

*51: The eye bracket mounting bolt is provided as 2 pcs./set.

*52: The trunnion mounting bolt is provided as 2 pcs./set.

*53: The flange mounting bolt is provided as 2 pcs./set.

*54: The foot mounting bolt is provided as 2 pcs./set.

*55: The eye bracket mounting bolt is provided as 2 pcs./set.

*56: The trunnion mounting bolt is provided as 2 pcs./set.

*57: The flange mounting bolt is provided as 2 pcs./set.

*58: The foot mounting bolt is provided as 2 pcs./set.

*59: The eye bracket mounting bolt is provided as 2 pcs./set.

*60: The trunnion mounting bolt is provided as 2 pcs./set.

*61: The flange mounting bolt is provided as 2 pcs./set.

*62: The foot mounting bolt is provided as 2 pcs./set.

*63: The eye bracket mounting bolt is provided as 2 pcs./set.

*64: The trunnion mounting bolt is provided as 2 pcs./set.

*65: The flange mounting bolt is provided as 2 pcs./set.

*66: The foot mounting bolt is provided as 2 pcs./set.

*67: The eye bracket mounting bolt is provided as 2 pcs./set.

*68: The trunnion mounting bolt is provided as 2 pcs./set.

*69: The flange mounting bolt is provided as 2 pcs./set.

*70: The foot mounting bolt is provided as 2 pcs./set.

*71: The eye bracket mounting bolt is provided as 2 pcs./set.

*72: The trunnion mounting bolt is provided as 2 pcs./set.

*73: The flange mounting bolt is provided as 2 pcs./set.

*74: The foot mounting bolt is provided as 2 pcs./set.

*75: The eye bracket mounting bolt is provided as 2 pcs./set.

*76: The trunnion mounting bolt is provided as 2 pcs./set.

*77: The flange mounting bolt is provided as 2 pcs./set.

*78: The foot mounting bolt is provided as 2 pcs./set.

*79: The eye bracket mounting bolt is provided as 2 pcs./set.

*80: The trunnion mounting bolt is provided as 2 pcs./set.

*81: The flange mounting bolt is provided as 2 pcs./set.

*82: The foot mounting bolt is provided as 2 pcs./set.

*83: The eye bracket mounting bolt is provided as 2 pcs./set.

*84: The trunnion mounting bolt is provided as 2 pcs./set.

*85: The flange mounting bolt is provided as 2 pcs./set.

*86: The foot mounting bolt is provided as 2 pcs./set.

*87: The eye bracket mounting bolt is provided as 2 pcs./set.

*88: The trunnion mounting bolt is provided as 2 pcs./set.

*89: The flange mounting bolt is provided as 2 pcs./set.

*90: The foot mounting bolt is provided as 2 pcs./set.

*91: The eye bracket mounting bolt is provided as 2 pcs./set.

*92: The trunnion mounting bolt is provided as 2 pcs./set.

*93: The flange mounting bolt is provided as 2 pcs./set.

*94: The foot mounting bolt is provided as 2 pcs./set.

*95: The eye bracket mounting bolt is provided as 2 pcs./set.

*96: The trunnion mounting bolt is provided as 2 pcs./set.

*97: The flange mounting bolt is provided as 2 pcs./set.

*98: The foot mounting bolt is provided as 2 pcs./set.

*99: The eye bracket mounting bolt is provided as 2 pcs./set.

*100: The trunnion mounting bolt is provided as 2 pcs./set.

*101: The flange mounting bolt is provided as 2 pcs./set.

*102: The foot mounting bolt is provided as 2 pcs./set.

*103: The eye bracket mounting bolt is provided as 2 pcs./set.

*104: The trunnion mounting bolt is provided as 2 pcs./set.

*105: The flange mounting bolt is provided as 2 pcs./set.

*106: The foot mounting bolt is provided as 2 pcs./set.

*107: The eye bracket mounting bolt is provided as 2 pcs./set.

*108: The trunnion mounting bolt is provided as 2 pcs./set.

*109: The flange mounting bolt is provided as 2 pcs./set.

*110: The foot mounting bolt is provided as 2 pcs./set.

*111: The eye bracket mounting bolt is provided as 2 pcs./set.

*112: The trunnion mounting bolt is provided as 2 pcs./set.

*113: The flange mounting bolt is provided as 2 pcs./set.

*114: The foot mounting bolt is provided as 2 pcs./set.

*115: The eye bracket mounting bolt is provided as 2 pcs./set.

*116: The trunnion mounting bolt is provided as 2 pcs./set.

*117: The flange mounting bolt is provided as 2 pcs./set.

*118: The foot mounting bolt is provided as 2 pcs./set.

*119: The eye bracket mounting bolt is provided as 2 pcs./set.

*120: The trunnion mounting bolt is provided as 2 pcs./set.

*121: The flange mounting bolt is provided as 2 pcs./set.

*122: The foot mounting bolt is provided as 2 pcs./set.

*123: The eye bracket mounting bolt is provided as 2 pcs./set.

*124: The trunnion mounting bolt is provided as 2 pcs./set.

*125: The flange mounting bolt is provided as 2 pcs./set.

*126: The foot mounting bolt is provided as 2 pcs./set.

*127: The eye bracket mounting bolt is provided as 2 pcs./set.

*128: The trunnion mounting bolt is provided as 2 pcs./set.

*129: The flange mounting bolt is provided as 2 pcs./set.

*130: The foot mounting bolt is provided as 2 pcs./set.

*131: The eye bracket mounting bolt is provided as 2 pcs./set.

*132: The trunnion mounting bolt is provided as 2 pcs./set.

*133: The flange mounting bolt is provided as 2 pcs./set.

*134: The foot mounting bolt is provided as 2 pcs./set.

*135: The eye bracket mounting bolt is provided as 2 pcs./set.

*136: The trunnion mounting bolt is provided as 2 pcs./set.

*137: The flange mounting bolt is provided as 2 pcs./set.

*138: The foot mounting bolt is provided as 2 pcs./set.

*139: The eye bracket mounting bolt is provided as 2 pcs./set.

*140: The trunnion mounting bolt is provided as 2 pcs./set.

*141: The flange mounting bolt is provided as 2 pcs./set.

*142: The foot mounting bolt is provided as 2 pcs./set.

*143: The eye bracket mounting bolt is provided as 2 pcs./set.

*144: The trunnion mounting bolt is provided as 2 pcs./set.

*145: The flange mounting bolt is provided as 2 pcs./set.

*146: The foot mounting bolt is provided as 2 pcs./set.

*147: The eye bracket mounting bolt is provided as 2 pcs./set.

*148: The trunnion mounting bolt is provided as 2 pcs./set.

*149: The flange mounting bolt is provided as 2 pcs./set.

*150: The foot mounting bolt is provided as 2 pcs./set.

*151: The eye bracket mounting bolt is provided as 2 pcs./set.

*152: The trunnion mounting bolt is provided as 2 pcs./set.

*153: The flange mounting bolt is provided as 2 pcs./set.

*154: The foot mounting bolt is provided as 2 pcs./set.

*155: The eye bracket mounting bolt is provided as 2 pcs./set.

*156: The trunnion mounting bolt is provided as 2 pcs./set.

*157: The flange mounting bolt is provided as 2 pcs./set.

*158: The foot mounting bolt is provided as 2 pcs./set.

*159: The eye bracket mounting bolt is provided as 2 pcs./set.

How to order

Without switch (built-in magnet for switch)

SCM-LB-40B-100 M P4 P40 I - HP1

With switch (built-in magnet for switch)

SCM-LB-40B-100-SW11-D-M P4 P40 I - HP1

A Mounting *1						
B Bore size						
C Cushion						
D Stroke						
E Switch model No. *3						
F Switch quantity						
G Switch mounting						
H Option *4						
I Accessory *5						

Code	Description					
A Mounting						
	Bore size (ø)	20	25	32		
00	Basic	●	●	●		
LB	Axial foot	●	●	●		
FA	Rod side flange	●	●	●		
FB	Head side flange	●	●	●		
CA	Eye bracket	●	●	●		
TA	Rod side trunnion	●	●	●		
TB	Head side trunnion	●	●	●		
B Bore size (mm)						
20	ø20					
25	ø25					
32	ø32					
40	ø40					
C Cushion						
B	With two-sided air cushion					
R	Rod side air cushioned					
H	Head side air cushioned					
D	With two-sided rubber cushion					
D Stroke (mm)						
Bore size	Stroke *2	Custom Stroke				
ø20 to ø40	10 to 150	In 1 mm increments				
E Switch model No.						
Refer to the compatibility table on pages 98 to 201 for switch model No.						
F Switch quantity						
R	1 on rod side					
H	1 on head side					
D	2					
T	3					
4	4 (when there are more than 4 switches, indicate switch quantity.)					
G Switch mounting						
Blank	Rail method					
Z	Band method					
H Option						
Q	Switch rail attached at shipment					
M	Piston rod, rod nut material (stainless steel)					
I Accessory						
	Bore size (ø)	20	25	32		
I	Rod eye	●	●	●		
Y	Rod clevis (pin and snap ring attached)	●	●	●		
B2	Clevis bracket	●	●	●		

⚠ Precautions for model No. selection

*1: Mounting bracket will be shipped with the product.

*2: Refer to the previous page for the min. stroke length.

*3: When the bore size is ø20 to ø40 and switch mounting is the rail type, SW19, SWBW, SWCC, SWDK, SWDL, and SWDM cannot be mounted.

*4: "Q" (switch rail attached at shipment) is not available for "Z" switch mounting.

*5: "I" and "Y" cannot be selected together.

*6: Refer to "Pneumatic Cylinders I (Catalog No.CB-029SA)" for made-to-order specifications of rod end form.

*7: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

*8: Speed controllers are available as a related product. Contact CKD for details.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Long service life cylinder



Compact cylinder double acting/single rod

SSD2-P4/P40-HP1 Series

●Bore size: ø12/ø16/ø20/ø25/ø32/ø40

JISCode



Specifications

	SSD2-P4/P40-HP1 SSD2-L-P4/P40-HP1 (with switch)								
STM	Bore size mm	ø12	ø16	ø20	ø25	ø32			
STG	Actuation				Double acting				
STR2	Working fluid				Compressed air				
SCPD3	Max. working pressure MPa			1.0					
CMK2	Min. working pressure MPa			0.1					
SCM	Proof pressure MPa			1.6					
SCG	Ambient temperature °C			-10 to 60 (no freezing)					
SSD2	Port size	M5			Rc1/8 *1				
SMG	Stroke tolerance mm		+1.0 0						
LCR	Working piston speed mm/s		50 to 500						
STG	Cushion		No						
STS	Lubrication		Not available						
STL	LSH-A LSH-G LSH-F	Allowable absorbed Energy J	Without cushion	0.004	0.01	0.016	0.021	0.025	0.092

*1: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

Stroke

	Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
LST	ø12	5/10/15/20	30	
	ø16	25/30		
LSTM	ø20	5/10/15/20/25	50	
	ø25	30/35/40/45/50		
ABP2	ø32	5/10/15/20/25/30/	100	
	ø40	35/40/45/50/75/100		

[Stroke table]

Stroke (mm)	Applicable bore size					
	12	16	20	25	32	40
SMG	5	●	●	●	●	●
STG	10	●	●	●	●	●
STM	15	●	●	●	●	●
LCR	20	●	●	●	●	●
LCG	25	●	●	●	●	●
STR2	30	●	●	●	●	●
	35		●	●	●	●
LSH-A	40		●	●	●	●
LSH-G	45		●	●	●	●
LSH-F	50		●	●	●	●
LSHL-A	75			●	●	●
LSHL-G	100			●	●	●
Min. Stroke (mm) *1			1			
Max. Stroke (mm)	30		50		100	
Custom Stroke *2		In 1 mm increments				

1: Less than 5 mm with 1-color display switch and less than 10 mm with the 2-color display, off-delay, AC magnetic field proof, T1 or T8* switch are not available. Refer to "Pneumatic Cylinders I (Catalog No. CB-029SA)" for the min. Stroke with switch.

*2: The dimensions of the total length with the custom Stroke are handled the same as the next longer standard Stroke.

Refer to the SSD2 Series in "Pneumatic Cylinders I (No. CB-029SA)" for dimensions.

CKD

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSDMSDG-L
SMG

LCR

STG

STR2

SCG

SSD2

STM

LCR

STG

STS

STL

LSH-A

LSH-G

LSH-F

LSHM-A

LSHM-G

LSHM-F

LSHL-A

LSHL-G

LSHL-F

LSHM-A

LSHM-G

LSHM-F

LST

LSTM

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SCG

SSD2

STM

LCR

STG

STR2

SCM

SSD2

STM

LCR

STG

STR2

SCM

SSD2

STM

LCR

STG

STR2

SCM

SSD2

STM

LCR

STG

164

Compatible with rechargeable batteries

Low-profile long

stroke hand

Air

Booster

processes

How to order

Without switch (without magnet for switch)

SSD2-**12****5**-**N****P4**
P40-**LB**-**I**-**HP1**

With switch (built-in magnet for switch)

SSD2-L-**12****10**-**SW11**-**R**-**N****P4**
P40-**LB**-**I**-**HP1****A** Model No.**B** Bore size**C** Stroke**D** Switch model No.

*1
*2
*3
*8
*9

E Switch quantity**F** Option*4**G** Mounting bracket

*5, *6

H Accessory

*7

Code	Description
A Model No.	
SSD2	Double acting/single rod
SSD2-L	Double acting/single rod/with switch

B Bore size (mm)

12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40

C Stroke (mm)

Refer to the Stroke table on page 164.

D Switch model No.

Refer to the compatibility table on pages 198 to 201 for switch model No.

E Switch quantity

R	1 on rod side
H	1 on head side
D	2

F Option

	Bore size (mm)	12	16	20	25	32	40
Blank	Rod end female thread	●	●	●	●	●	●
N	Rod end male thread	●	●	●	●	●	●
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●

G Mounting bracket

Blank	Without mounting bracket
LB	Axial foot type
CB	Clevis bracket (pin and snap ring attached)
FA	Rod side flange
FB	Head side flange

H Accessory (available when rod end male thread "N" is selected)

I	Rod eye
Y	Rod clevis (pin and snap ring attached)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Related products

Speed controller									
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.					
		M5	1/8	1/4	4 ø4	6 ø6	8 ø8	10 ø10	
SC3W-M5-*P4		●			●	●			
SC3W-6-*P4			●		●	●	●		
SC3W-8-*P4				●		●	●	●	

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

Long service life cylinder



Small compact cylinder Double acting/single rod

MSD-P4/P40-HP1 Series

●Bore size:ø6/ø8

JISCode

**Specifications**

Item	MSD-P4/P40-HP1 MSD-L-P4/P40-HP1 (with switch)
LCG	
STM	
STG	Bore size mm ø6, ø8
STR2	Actuation Double acting
SCPD3	Working fluid Compressed air
CMK2	Max. working pressure MPa 1.0
SCM	Min. working pressure MPa 0.15
SCG	Proof pressure MPa 1.6
SSD2	Ambient temperature °C -10 to 60 (where,no freezing)
SMG	Port size M3
LCR	Stroke tolerance mm +0.5
STG	0
STS	Working piston speedmm/s 50 to 500
STL	Cushion No
LSH-A	Lubrication Not available
LSH-G	
LSH-F	Allowable absorbed energy This product cannot absorb the energy generated by an external load mounted on the cylinder.
LSHL-A	J When using the product with no load, separately provide a shock absorber on the outside.

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke with two switches(mm)		Min. Stroke with one switch (mm)	
			Reed switch	Proximity switch	Reed switch	NoneContact switch
ø6	5/10/15/20	30	10	5 (10)	5	5
ø8	25/30					

*1: Products with Stroke other than standard Stroke are not available.

*2: For F2Y, F3Y or F3P, the min. Stroke will be the dimensions in ().

LSTM

LSTM

Low-profile long stroke hand

LSTM

Air

Booster

ABP2

SCPD3

CMK2

SCM

SSD2

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

For Dimensions, refer to the MSD Series in "Pneumatic Cylinders I (No. CB-029SA)".

How to order

- Without switch (without magnet for switch)

MSD - 6 - 5 — R P4 P40 - HP1

- With switch (built-in magnet for switch)

MSD-L - 6 - 5 - SW81 - R - R P4 P40 - HP1

A Model No.

B Bore size

C Stroke

D Switch model No.

*1



E Switch quantity

*2

F Piping port position

Code	Description	
A Model No.		
MSD	Double acting	Single rod Without switch
MSD-L		With switch
B Bore size(mm)		
6	ø6	
8	ø8	
C Stroke(mm)		
5	5	
10	10	
15	15	
20	20	
25	25	
30	30	
D Switch model No.		
Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.		
E Switch quantity		
R	1 on rod side	
H	1 on head side	
D	2	
F Piping port position		
Blank	Front piping	
R	Rear piping	

Related products

Speed controller						
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.		
		M3	M5	1/8	4(ø4)	6(ø6)
SC3W-M3-*P4		●			●	

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

⚠ Precautions for model No. selection

*1: When using the type with switch, use a non-magnetic (stainless steel, etc.) mounting bolt for ø6, ø8.

*2: For rear piping, body side installation is possible. Note that 2 bolts are used for rod side mounting and head side mounting.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	



Small guided compact cylinder
Double acting/guided/with switch

Long service life cylinder

MSDG-L-P4/P40-HP1 Series

●Bore size:ø6/ø8/ø12/ø16



Specifications

Item	MSDG-L-P4/P40-HP1(With switch)				
LCG	Bore size mm	ø6	ø8	ø12	ø16
STM	Actuation	Double acting			
STG	Working fluid	Compressed air			
STR2	Max. working pressure MPa		1.0		
SCPD3	Min. working pressure MPa	0.2	0.15		0.1
CMK2	Proof pressure MPa		1.6		
SCM	Ambient temperature °C	5 to 60			
SCG	Port size	Front piping	M3		M5
SSD2	Rear piping		M3		M3
SMG	Stroke tolerance mm		+2.0		0
LCR	Working piston speed mm/s	50 to 500			
STG	Cushion	With rubber cushion			
STS	Lubrication	Not available			
STL	Allowable absorbed energy J	0.004	0.014	0.044	0.110

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. stroke length with two switches (mm)		Min. stroke length with one switch (mm)	
			Reed switch	Proximity switch	Reed switch	Proximity switch
ø6						
ø8						
ø12						
ø16						
LST	5/10/15/20	30	10	5	5	5
LSTM	25/30					

Note: Products with Stroke other than standard Stroke are not available.

For dimensions, refer to the MSDG Series in "Pneumatic Cylinders I (No. CB-029SA)" for details.

How to order

● With switch (built-in magnet for switch)

MSDG-L-6-30-SW81-D-R P4 P40-HP1

Double acting
Guided

A Bore size

B Stroke

C Switch model No.

*1

*2

D Switch quantity

E Piping port position

*3

Code	Description
A Bore size(mm)	
6	ø6
8	ø8
12	ø12
16	ø16

Code	Description
B Stroke(mm)	
5	5
10	10
15	15
20	20
25	25
30	30

Code	Description
C Switch model No.	
Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.	

Code	Description
R	1 on rod side
H	1 on head side
D	2

Code	Description
Blank	Front piping
R	Rear piping

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

⚠ Precautions for model No. selection

*1: When using the ø6/ø8 with switch, use a non-magnetic (stainless steel, etc.) mounting bolt.

*2: When using a proximity switch with ø12/ø16, use a non-magnetic (stainless steel, etc.) through bolt.

*3: For rear piping, body side installation is possible.

Related products

Speed controller						
Model No.	Appearance	Port size (Rc or R)			Compatible tube O.D.	
		M3	M5	1/8	4 (ø4)	6 (ø6)
SC3W-M3-*P4		●			●	
SC3W-M5-*P4			●		●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.




Compact cylinder Double acting/single rod

SMG-P4/P40-HP1 Series

●Bore size: ø6/ø10/ø16/ø20/ø25/ø32

JISCode

**Specifications**

Item	SMG-P4/P40-HP1 SMG-L-P4/P40-HP1 (with switch)						
	STM	Bore size mm	ø6	ø10	ø16	ø20	ø25
STG	Actuation				Double acting		
STR2	Working fluid				Compressed air		
SCPD3	Max. working pressure MPa				0.7		
CMK2	Min. working pressure MPa	0.12		0.06		0.05	
SCM	Proof pressure MPa				1.05		
SCG	Ambient temperature °C				-10 to 60 (no freezing)		
SSD2	Port size			M5		Rc1/8	
SMG	Stroke tolerance mm				+1.5 0		
LCR	Working piston speed mm/s				50 to 500		
STG	Cushion				With rubber cushion		
STS	Lubrication				Not available		
STL	Allowable absorbed energy J	0.012	0.036	0.1	0.1	0.19	0.5

Stroke

Bore size (mm)	Standard Stroke (mm)	Min. Stroke (mm)
ø6		
ø10	5, 10, 15, 20, 25, 30, 40, 50, 60	
ø16		
ø20		5
ø25	5, 10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 90, 100	
ø32		

*1:The custom Stroke is available in 5 mm increments.

However, the total length is the same as that of the next longer standard Stroke.

For dimensions, refer to the SMG Series in "Pneumatic Cylinders I (No. CB-029SA)".

How to order

Without switch (without magnet for switch)*1

SMG - 32 - 25 ————— **P40 - HP1**

With switch (built-in magnet for switch)

SMG-L - 32 - 25 - SW51 - R - **P4 P40 - HP1**

A Model No.

B Bore size

C Stroke

D Switch model No.

E Switch quantity

*1: When without switch, supports P4 specifications with HP1

Code	Description
A Model No.	
SMG	Double acting
SMG-L	Double acting/with switch

B Bore size (mm)

6	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Stroke (mm)

Standard Stroke	Applicable bore size					
	ø6	ø10	ø16	ø20	ø25	ø32
5	●	●	●	●	●	●
10	●	●	●	●	●	●
15	●	●	●	●	●	●
20	●	●	●	●	●	●
25	●	●	●	●	●	●
30	●	●	●	●	●	●
40	●	●	●	●	●	●
50	●	●	●	●	●	●
60	●	●	●	●	●	●
70				●	●	●
80				●	●	●
90				●	●	●
100				●	●	●

D Switch model No.

Refer to the switch model No.
Refer to the compatibility table on pages 198 to 201.

E Switch quantity

R	1 on rod side
H	1 on head side
D	2

Related products

Speed controller						
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.		
		M5	1/8	4 (ø4)	6(ø6)	8(ø8)
SC3W-M5-*P4		●		●	●	
SC3W-6-*P4			●	●	●	●

Specify the compatible tube O.D. code for *.

Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Guided cylinder Double acting/single rod

STG-M_B-P4/P40-HP1 Series

●Bore size: ø12/ø16/ø20/ø25/ø32/ø40

JISCode

**Specifications**

Item	STG-M/B-P4/P40-HP1										
LCG	ø12	ø16	ø20	ø25	ø32	ø40					
STM	Actuation										
STG	Double acting										
STR2	Working fluid										
SCPD3	Compressed air										
CMK2	Max. working pressure MPa										
SCM	1.0										
SSD2	Min. working pressure MPa										
SCG	0.15										
SMG	Proof pressure MPa										
LCR	1.6										
STG	Ambient temperature °C										
STS	-10 to 60 (no freezing)										
STL	Port size										
LSH-A	M5	Rc1/8									
LSH-G	Stroke tolerance mm										
LSH-F	+2.0										
LSHL-A	0										
LSHL-G	Working piston speed mm/s										
LSHL-F	50 to 500										
LST	Cushion										
LSTM	With rubber cushion										
ABP2	Lubrication										
SCPD3	Not available										
CMK2	Allowable absorbed energy J	0.056	0.088	0.157	0.157	0.401					
SCM						0.627					
SSD2											

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch(mm)
ø12	10/20/30/40/50/75/100			
ø16	125/150			
ø20	20/30/40/50/75/100			
ø25	125/150	150	5	5(10) *2
ø32	25/50/75/100/125/150			
ø40				

*1: The custom Stroke is available in 5 mm increments. However, the total dimensions are the same as the longer standard Stroke. A dedicated body with dimensions matched to the Stroke is available. Contact CKD for details.

*2: For types with one or two switches. The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

Related products

Speed controller											
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.							
		M5	1/8	1/4	3/8	4(ø4)	6(ø6)	8(ø8)	10(ø10)	12(ø12)	
STM	SC3W-M5-*P4	●				●	●				
LCR	SC3W-6-*P4		●			●	●	●			
LCG	SC3W-8-*P4			●		●	●	●			
STR2	SC3W-10-*P4				●		●	●	●	●	
LSH-A											
LSH-G											
LSH-F											
LSHL-A											

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible component P4* Series" (No.CC-1226A) for details.

Refer to the STG-M_B Series in "Pneumatic Cylinders II (No. CB-030SA)" for dimensions.

How to order

Without switch (built-in magnet for switch)

STG - **M** - **32** - **25** - **P4** - **P40** - **HP1**

With switch (built-in magnet for switch)

STG - **M** - **32** - **25** - **SW11** - **R** - **P4** - **P40** - **HP1**

Model No.

A Bearing

B Bore size

C Stroke

D Switch model
No. *1 *2

E Switch quantity

Code	Description
A Bearing	
M	Metal bush bearing
B	Ball bearing

B Bore size (mm)

12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40

C Stroke (mm)	Applicable bore size					
	ø12	ø16	ø20	ø25	ø32	ø40
Standard Stroke	10	●	●			
	20	●	●	●	●	
	25				●	●
	30	●	●	●	●	
	40	●	●	●	●	
	50	●	●	●	●	●
	75	●	●	●	●	●
	100	●	●	●	●	●
	125	●	●	●	●	●
	150	●	●	●	●	●
Min. Stroke *5		5(10)				
Custom Stroke *3, *4		In 5 mm increments				

D Switch model No.

Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.

E Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

⚠ Precautions for model No. selection

*1: T8H/V switch cannot be installed on STG-12 or 16.

*2: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

*3: The total dimensions are the same as the longer standard Stroke.

*4: A dedicated body with dimensions matched to the Stroke is available. Contact CKD for details.

*5: The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	



Guided cylinder Double acting/single rod

Long service life cylinder

STM-^M_B-P4/P40-HP1 Series

● Bore size: ø6, ø10

JISCode



Specifications

	Descriptions		STM-M/B-P4/P40-HP1	
LCG	Bore size	mm	ø6	ø10
STM	Actuation		Double acting	
STG	Working fluid		Compressed air	
STR2	Max. working pressure MPa		0.7	
SCPD3	Min. working pressure MPa		0.15	
CMK2	Proof pressure MPa		1.05	
SCM	Ambient temperature °C		-10 to 60 (no freezing)	
SSD2	Port size		M3	
SMG	LSH-A		+1.5	
LCR	LSH-G		0	
STG	LSH-F			
STS	LSHL-A			
STL	LSHL-G			
LSH-A	LSHL-F			
Linear Slide Hand	Working piston speed mm/s		50 to 500	
LSH-G	Cushion		With rubber cushion	
LSH-F	Lubrication		Not available	
LST	Allowable absorbed energy J		0.008	0.054
LSTM				
Low-profile long stroke hand				
ABP2				

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke	Min. stroke with switch
ø6	5/10/15	15		
ø10	5/10/15/20	20	5	5

Note: Products other than standard Stroke are made-to-order products.

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Refer to the STM-^M_B Series in "Pneumatic Cylinders II (No. CB-030SA)" for dimensions.

CKD

STM-B-P4/P40-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)

STM - M - 10 - 15 - A - P4/P40 - HP1

With switch (built-in magnet for switch)

STM - M - 10 - 15 - SW83 - D - A - P4/P40 - HP1

A Bearing

B Bore size

C Stroke

D Switch model No.

*1

E Switch quantity

F Option

Code	Item	
A Bearing		
M	Metal bush bearing	
B	Ball bearing	
B Bore size (mm)		
6	ø6	
10	ø10	
C Stroke (mm)		
	Bore size	
	6	10
5	5	●
10	10	●
15	15	●
20	20	●
D Switch model No.		
Refer to the compatibility table on pages 198 to 201 for switch model No.		
E Switch quantity		
R	1 on rod side	
H	1 on head side	
D	2	
F Option		
A	Side mounting	
R	Rear piping	

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SCG
SSD2
SMG
LCR
STG
STS
STL

Environment-resistant cylinder
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Linear Slide Hand
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Low-profile long stroke hand
LST
LSTM

Air Booster
ABP2

Compatible with rechargeable batteries
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Supports food processing
SCPD3
CMK2
SCM
SCG
SSD2
STG

⚠ Precautions for model No. selection

*1: When using a 2-color display proximity switch for STM-B-6, avoid mounting the cylinder on a magnetic substance such as a metal plate. This could lead to switch detection malfunction.

Related products

Speed controller						
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.		
		M3	M5	1/8	4(ø4)	6(ø6)
SC3W-M3*-P4		●			●	
SC3*-P4			●		●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible component P4* Series" (No.CC-1226A) for details.



Linear slide cylinder Double acting/single rod

Long service life cylinder

LCR-P4/P40-HP1 Series

●Bore size:ø6/ø8/ø12/ø16/ø20/ø25

JISCode



Specifications

LCR	Descriptions						LCR-P4/P40-HP1					
LCG	Bore size mm		ø6	ø8	ø12	ø16	ø20	ø25				
STM	Actuation				Double acting							
STG	Working fluid					Compressed air						
STR2	Max. working pressure MPa					0.7						
SCPD3	Min. working pressure MPa					0.15 (*1)						
CMK2	Proof pressure MPa					1.05						
SCM	Ambient temperature °C					-10 to 60 (no freezing)						
SCG	Port size	Main body side	M3		M5		Rc1/8					
SSD2		Main body back	-		M3		M5	Rc1/8				
SMG	Stroke tolerance mm				+2.0		0	(*2)				
LCR	Working piston speed mm/s				50 to 500 (*3)							
STS	Cushion				With rubber cushion							
STL	Lubrication				Not available							
LSH-A	Allowable absorbed energy J				Refer to the following table.							

*1: 0.2 MPa when using ø6 shock absorber type stopper.

*2: Note that there will be a slight gap between the end plate and floating bush if no stopper is attached.

*3: Keep within 50 to 200 mm/s when using a stroke adjusting stopper.

*4: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.

Stroke

	Bore size (mm)	Standard Stroke (mm)
LSHM-G	ø6	10, 20, 30, 40, 50
LSHM-F	ø8	10, 20, 30, 40, 50, 75
LST	ø12	10, 20, 30, 40, 50, 75, 100
LSTM	ø16	10, 20, 30, 40, 50, 75, 100, 125
	ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
ABP2	ø25	10, 20, 30, 40, 50, 75, 100, 125, 150

Note: Products with Strokes other than the above are not available.

SCPD3

CMK2

LCR allowable absorbed energy (Eo)

Bore size	Standard (J)	With stroke adjusting stopper (J)	With shock absorber stopper (J)
ø6	0.025	0.0032	0.14
ø8	0.058	0.0032	0.25
ø12	0.112	0.014	0.25
ø16	0.176	0.043	0.65
ø20	0.314	0.055	1.3
ø25	0.314	0.14	1.3

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Related products

Speed controller									
Model No.	Appearance	Port size (Rc or R)			Compatible tube O.D.				
		M3	M5	1/8	1/4	3/8	4(ø4)	6(ø6)	8(ø8)
SC3W-M3- *P4		●	●				●		
SC3W-M5- *P4			●				●	●	
SC3W-6- *P4				●			●	●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

Refer to the LCR Series in "Pneumatic Cylinders II (No. CB-030SA)" for dimensions.

CKD

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F

Linear Slide Hand

LST
LSTM
ABP2

Compatible with rechargeable batteries

SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM

Supports food mfg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STG

How to order

Without switch (built-in magnet for switch)

LCR - 8 - 40 - S506 - DTN - P4/P40 - HP1

With switch (built-in magnet for switch)

LCR - 12 - 40 - SW81 - R - S506 - DTN - P4/P40 - HP1

Model No.

A Bore size

Code	Description				
A Bore size					
6	ø6				
8	ø8				
12	ø12				
16	ø16				
20	ø20				
25	ø25				

B Stroke

		Bore size (ø)				
		6	8	12	16	20
10	10	●	●	●	●	●
20	20	●	●	●	●	●
30	30	●	●	●	●	●
40	40	●	●	●	●	●
50	50	●	●	●	●	●
75	75		●	●	●	●
100	100			●	●	●
125	125			●	●	●
150	150				●	●

C Switch model No.

Refer to the compatibility table on pages 198 to 201 for switch model No.

D Switch quantity

D Switch quantity
R 1 on rod side
H 1 on head side
D 2

E Stopper

E Stopper 178 page for details on the [Stopper].
--


F Option

F Option
Blank Port on stopper: without port
D Port on stopper: side and bottom ports *2, *8
Blank Stopper block material: Steel
T Stopper block material: steel (nitriding) *2
Plug included
Blank No
N With side piping port plug (not available for ø6, ø25) *5

⚠ Precautions for model No. selection

- *1: The port positions of the standard without stopper are ① and ③ in the figure below.
- *2: Can be selected for the type with stopper only.
- *3: A1**, A2**, A5** and A6** of ø6 to ø8-10st, ø12 to ø25-20st or less cannot be adjusted with the standard stopper, so they are made to order.
- *4: Select the F/H type switch when using the two switches for the S*** or A*** type with ø6 to ø8-30st or less.
- *5: Select when using rear piping.
- *6: Can be selected only when using stroke adjusting stopper (S) and one side mixed type (C).
- *7: When using the W3 to 6 (two-sided combined stopper) with ø6 (all st), ø8-20st, 30st, ø12-30st to 50st and ø16-30st to 50st, use the axial lead wire when using the cylinder with two switches or the head side.
- *8: Cannot be selected when choosing two-sided combined type (W).
- *9: The adjustable stroke range when choosing two-sided combined type (W) is ø6:9 mm, ø8:13.5 mm, ø12:14.5 mm, ø16:15 mm, ø20:13 mm, ø25:10 mm.
- *10: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.

● Stopper position



SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

LCR-P4/P40-HP1 Series

[② Stopper]

Long service life cylinder		Description		Code		Description	
SCPD3	CMK2	E Stopper					
SCM	SSD2	Blank	No option			C One side hybrid stopper mix (shock absorber stopper, stroke adjusting stopper)	
MDC2	S Stroke adjusting stopper			C1**	A1 + S3		
MSD	S1**	Stopper position ① (Can be changed to ④)	Stopper Installation position	C2**	A2+S4	Stopper Installation position	Stopper Installation position
MSDG-L	S2**	Stopper position ② (Can be changed to ③)		C3**	A3+S1		
SMG	S3**	Stopper position ③ (Can be changed to ②)		C4**	A4+S2		
LCR	S4**	Stopper position ④ (Can be changed to ①)		** part Adjustable stroke range ● Compatible with all. ▲ Compatible with some. *6		Stopper model No.	
LCG	S5**	Stopper position ①, ③	Stopper Installation position	Blank	5 mm or none	5 mm or none	S
STM	S6**	Stopper position ②, ④		02	15 mm or none	15 mm or none	A
STG	A Shock absorber stopper		Stopper Installation position	03	25 mm or none	25 mm or none	W
STR2	A1**	Stopper position ① (Can be changed to ④)		04	15 mm	5 mm	C
SCPD3	A2**	Stopper position ② (Can be changed to ③)	Stopper Installation position	05	25 mm	5 mm	
CMK2	A3**	Stopper position ③ (Can be changed to ②)		06	5 mm	15 mm	
SCM	A4**	Stopper position ④ (Can be changed to ①)		07	5 mm	25 mm	
SCG	A5**	Stopper position ①, ③					
SSD2	A6**	Stopper position ②, ④					
SMG	W Two-sided combined double stopper(Shock absorber stopper, metal stopper)						
LCR	W1**	A1 + metal stopper	Stopper Installation position				
STG	W2**	A2 + metal stopper					
	W3**	A3 + metal stopper					
	W4**	A4 + metal stopper					
	W5**	A5 + metal stopper					
	W6**	A6 + metal stopper					

Stopper model No. selection method

1 Stopper combination table

Model No.-[① Stopper type] [② Stopper position][③] Example) LCR-8-40-[S] [5]06

Note: When changing the stopper position from the head side to the rod side, the stopper must be purchased separately according to the Stroke and adjustable Stroke. Refer to "HP Series General Catalog" (Catalog No.CC-1421A). A1, A2 and adjustable Stroke of 15 mm and 25 mm may not be available depending on the Stroke.

Linear Slide Hand		Stroke adjustable (one side) Shock absorber(One side) Two-sided combined double stopper One side hybrid stopper mix			
		Stopper model No. [①]			
Compatible with rechargeable batteries	Stopper position model No. [②]	[S]	[A]	[W]	[C]
		[1] [S1]	[A1]	[W1]	[C1]
		[2] [S2]	[A2]	[W2]	[C2]
		[3] [S3]	[A3]	[W3]	[C3]
		[4] [S4]	[A4]	[W4]	[C4]
		[5] [S5]	[A5]	[W5]	
		[6] [S6]	[A6]	[W6]	

▲ shows the piping direction. When choosing two-sided combined type (W), the stopper bracket comes with piping on both sides. ▲ The stopper bracket on the reverse side of (piping direction) is provided with a plug.

■ : Shock absorber stopper
■ : Stroke adjusting stopper (adjusting range 5 mm)
■ : Metal adjusting stopper (adjusting range 15 mm)

LCR-P4/P40-HP1 Series

Stopper model No. selection method

LCR Double acting/single rod selection table

(Combination with stroke adjusting stopper, shock absorber stopper)

●: Available — : Not available

Model Model No.	Stopper type	Stroke adjustable																							
		S1			S2			S3			S4			S5			S6								
	Stopper code		Adjustment length code																						
	Bore size	Stroke	Blank	02	03	Blank	02	03	Blank	02	03	Blank	02	03	04	05	06	07	Blank	02	03	04	05	06	07
LCR	ø6, ø8	10	●	—	—	●	—	—	●	●	—	●	—	●	—	—	●	—	●	—	—	●	—		
		20 or more	●	●	—	●	●	—	●	●	—	●	●	—	●	●	—	●	●	●	●	●	●		
	ø12 to ø25	10	●	—	—	●	—	—	●	●	—	●	●	—	●	—	—	●	—	●	—	—	●		
		20	●	●	—	●	●	—	●	●	—	●	●	—	●	●	—	●	●	●	●	●	●		
	30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

Model Model No.	Stopper type	Shock absorber						Two-sided combined double stopper						One side hybrid stopper mix									
		Stopper code						C1						C2		C3		C4					
	Bore size	Stroke	A1	A2	A3	A4	A5	A6	W1	W2	W3	W4	W5	W6	Blank	02	03	Blank	02	03	Blank	02	03
LCR	ø6, ø8	10	—	—	●	●	—	—	—	—	●	●	—	—	—	—	—	●	—	—	●	—	—
		20 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	ø12 to ø25	10	—	—	●	●	—	—	—	—	●	●	—	—	—	—	—	●	—	—	●	—	—
		20	—	—	●	●	—	—	—	—	●	●	—	—	—	—	—	●	●	—	●	●	—
	30 or more	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

The table above also applies to combinations with option code D (with port on stopper) or T (steel stopper block (nitriding)).

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	Compatible with rechargeable batteries
LCG	
STR2	
STM	
STL	
STS	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	
CKD	179



Linear slide cylinder Double acting/single rod

LCG-P4/P40-HP1 Series

●Bore size:ø6/ø8/ø12/ø16/ø20/ø25

JISCode

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG**Specifications**

Item	LCG-P4/P40-HP1							
LCG	Bore size mm	ø6	ø8	ø12	ø16	ø20		
STM	Actuation	Double acting						
STG	Working fluid	Compressed air						
STR2	Max. working pressure MPa	0.7						
SCPD3	Min. working pressure MPa	0.15 (*1)						
CMK2	Proof pressure MPa	1.05						
SCM	Ambient temperature °C	-10 to 60 (no freezing)						
SCG	Port size	Main body side	M3	M5	Rc1/8			
SSD2		Main body back	M3		M5	Rc1/8		
SMG	Stroke tolerance mm	+2.0 0 (*2)						
LCR	Working piston speed mm/s	50 to 500 (*3)						
STG	Cushion	With rubber cushion						
STL	Lubrication	Not available						
LSH-A	Allowable absorbed energy J	Refer to the following table.						

*1: 0.2 MPa when using ø6 shock absorber type stopper.

*2: Note that there will be a slight gap between the end plate and floating bush if no stopper is attached.

*3: Keep within 50 to 200 mm/s when using a stroke adjusting stopper.

*4: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.

Stroke

	Bore size (mm)	Standard Stroke (mm)
LSHM-G	ø6	10, 20, 30, 40, 50
LSHM-F	ø8	10, 20, 30, 40, 50, 75
LST	ø12	10, 20, 30, 40, 50, 75, 100
LSTM	ø16	10, 20, 30, 40, 50, 75, 100, 125
	ø20	10, 20, 30, 40, 50, 75, 100, 125, 150
ABP2	ø25	10, 20, 30, 40, 50, 75, 100, 125, 150

Note: Products with Strokes other than the above are not available.

LCG allowable absorbed energy (Eo)

Bore size	Standard (J)	With stroke adjusting stopper (J)	With shock absorber stopper (J)
ø6	0.025	0.0032	0.14
ø8	0.058	0.0032	0.25
ø12	0.112	0.014	0.25
ø16	0.176	0.043	0.65
ø20	0.314	0.055	1.3
ø25	0.314	0.14	1.3

Related products

Speed controller						
Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.		
		M3	M5	1/8	4 (ø4)	6 (ø6)
SC3W-M3-*P4		●			●	
SC3W-M5-*P4			●		●	●
SC3W-6-*P4				●	●	●

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

For dimensions, refer to the LCG Series in "Pneumatic Cylinders II (No. CB-030SA)".

LCG-P4/P40-HP1 Series

How to order

How to order ($\phi 6$ to $\phi 16$)

Without switch (built-in magnet for switch)

LCG - 8 - 40 - S5 P4 P40 - HP1

With switch (built-in magnet for switch)

LCG - 12 - 40 - SW81 - R - A1DT P4 P40 - HP1

Model No.

A Bore size

B Stroke


C Switch model No.

D Switch quantity

E Option

⚠ Precautions for model No. selection

- *1: The port positions of the standard without stopper are ① and ③ in the figure below.
- *2: Combination of the stroke adjusting stopper and shock absorber stopper is made to order.
- *3: Can be selected for the type with stopper only.
- *4: Refer to the selection table below for combinations of options.
- *5: A1**, A2**, A5** and A6** of $\phi 6$ to $\phi 8$ with 10 mm Stroke or less and $\phi 12$ to $\phi 16$ with 20 mm Stroke or less are made to order since adjustment is not possible with the standard stopper.
- *6: Select the F/H type switch when using the two switches for the S*** or A*** type with $\phi 6$ to $\phi 8$ -30st or less.
- *7: The anti-rust type is made to order.
- *8: The stroke adjusting stopper for 0.3 MPa and over working pressure is the metal sealing type.
- *9: When changing the stopper position from the head side to the rod side, the stopper must be purchased separately according to the Stroke and adjustable Stroke. Refer to "Precautions when purchasing discrete stopper" in Pneumatic Cylinders II (Catalog No.CB-030SA) LCG Series. A1, A2 and adjustable Stroke of 15mm and 25mm may not be available depending on the Stroke.



LCG Double acting/single rod selection table

(Combination with stroke adjusting stopper, shock absorber stopper)

○: Available - : Not available

Model No. code	Option code		Stroke adjusting stopper						Shock absorber stopper					
	Bore size	Stroke	S1	S2	S3	S4	S5	S6	A1	A2	A3	A4	A5	A6
LCG	$\phi 6, \phi 8$	10	○	○	○	○	○	○	-	-	○	○	-	-
		20 or more	○	○	○	○	○	○	○	○	○	○	○	○
	$\phi 12$ to $\phi 25$	10 to 20	○	○	○	○	○	○	-	-	○	○	-	-
		30 or more	○	○	○	○	○	○	○	○	○	○	○	○

The table above also applies to combinations with option code D (with port on stopper) or T (steel stopper block (nitriding)).

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
STM	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	

LCG-P4/P40-HP1 Series

Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	



Twin rod cylinder Double acting/standard

STR2-^M_B-P4/P40-HP1 Series

●Bore size:ø6/ø10/ø16/ø20/ø25/ø32

JISCode



Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Low-profile long stroke hand

Compatible with rechargeable batteries

Supports food mfg. processes

Specifications

Item	STR2-M-P4/P40-HP1 (metal bush bearing) STR2-B-P4/P40-HP1 (ball bearing)					
LCG	Bore size mm	ø6	ø10	ø16	ø20	ø25
STM	Actuation			Double acting		
STG	Working fluid			Compressed air		
STR2	Max. working pressure MPa			0.7		
SCPD3	Min. working pressure MPa	0.2	0.15		0.1	
CMK2	Proof pressure MPa			1.05		
SCM	Ambient temperature °C			-10 to 60 (no freezing)		
SCG	Port size			M5		Rc1/8
SSD2	Stroke tolerance mm			+2.0		0
SMG	Adjustable stroke range mm			0 to -5		
LCR	Working piston speed mm/s			50 to 500		
STG	Non-rotating accuracy	STR2-M	±0.4°	±0.3°		±0.2°
STS	LSH-A	STR2-B	±0.2°	±0.1°		±0.3°
STL	Piston rod	STR2-M		Metal bush bearing		
LSH-G	Bearing	STR2-B		Ball bearing		
LSH-F	Cushion			Rubber cushion		
LSHL-A	Lubrication			Not available		
LSHM-A	Allowable absorbed energy	PUSH	0.008	0.061	0.181	0.303
LSHM-G	J PULL		0.059	0.083	0.083	0.127
LSHM-F						0.237
						0.311

Stroke

Bore size	Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch
ø6	10,20,30,40,50	50		
ø10				
ø16				
ø20	10,20,30,40,50	100	5	10
ø25	60,70,80,90,100			
ø32		*1		

*1: In the case of rear piping:

- ø16: 70
- ø20/ø25: 60
- ø32: 50

*2: Custom Stroke

Available in 1 mm increments. However, the total length is the same as that of the next longer standard Stroke.

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Refer to the STR2-^M_B Series in "Pneumatic Cylinders II (No.CB-030SA)" for dimensions.

How to order

Without switch (built-in magnet for switch)

STR2 - M - 16 - 30 - R - P4/P40 - HP1

With switch (built-in magnet for switch)

STR2 - M - 16 - 30 - SW51 - R - R - P4/P40 - HP1

Model No.

A Bearing

B Bore size

C Stroke

*2
■ The custom Stroke is available in 1 mm increments.

D Switch model No.

*3

E Switch quantity

F Option
*4

Code	Description
A Bearing	
M	Metal bush bearing *1
B	Ball bearing

B Bore size(mm)

6	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Stroke(mm)

Bore size	Stroke	Available Stroke	Intermediate Stroke
ø6	5 to 50	100	In 1 mm increments
ø10	5 to 50		
ø16	5 to 100		
ø20	5 to 100		
ø25	5 to 100		
ø32	5 to 100		

D Switch model No.

Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.

E Switch quantity

R	1 on rod side
H	1 on head side
D	2

F Option

O	Change piping port position by 180°
R	Rear piping

Precautions for model No. selection


*1: Bearing method M supports P4 specifications with HP1.

*2: The max stroke length of rear piping "R" is:

- ø6, 10: 50 Stroke
- ø16: 70 Stroke
- ø20/25: 60 stroke
- ø32: 50 stroke

*3 : STR2-B-6,10 is not compatible with reed switch.

*4: The piping port positions for "O" are as shown in the figure below.

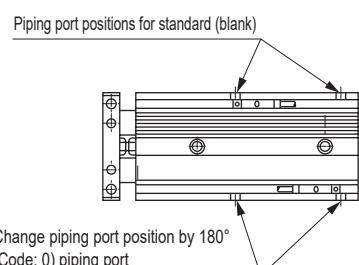

Related products

Model No.	Appearance	Port size (Rc or R)		Compatible tube O.D.			
		M3	M5	1/8	4 (ø4)	6(ø6)	8(ø8)
SC3W-M5-P4				●		●	●
SC3W-6-P4					●	●	●


Specify the compatible tube O.D. code for *. Refer to "rechargeable battery compatible Component P4* Series" (No.CC-1226A) for details.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	



Linear slide hand Double acting/Single acting
LSH-A-P4/P40-HP1 Series

●Operating Stroke: 4, 6, 10, 14, 22mm

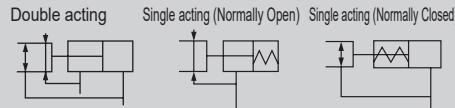


Specifications

Descriptions		LSH-A-P4/P40-HP1					
LCG	Bore size mm	ø6	ø10	ø16	ø20	ø25	ø32
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)					
STG	Working fluid	Compressed air					
STR2	Max. working pressure MPa	0.7					
SCPD3	Min. working pressure MPa	Double acting 0.15	0.2	0.1			
CMK2		Single acting 0.3	0.35	0.25			
SCM	Port size	M3		M5			
SSD2	Ambient temperature °C	-10 to 60 (no freezing)					
SMG	Operating Stroke mm	4	6	10	14	22	
LCR	Repeatability mm	±0.01					
STG	Weight Double acting kg	Finger OP: 1, 2, 3	0.032	0.06	0.135	0.275 (0.28)	0.49 (0.495)
STL	(Single acting)	Finger OP: 4			0.14	0.28 (0.285)	0.495 (0.5)
LSH-A	Lubrication	Not available					

Gripping power

Refer to pages 194 to 197 for details.

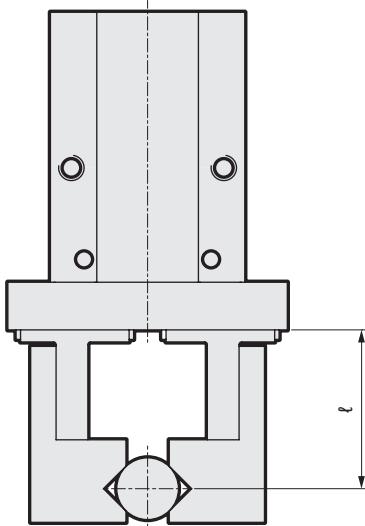

Bore size (mm)	Double acting	
	Open side	Closed side
ø6	6.1	3.3
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65
ø32	193	158

Bore size (mm)	Single acting (Normally Open)	
	Closed side	
ø6	1.9	
ø10	7.1	
ø16	27	
ø20	-	
ø25	33	
ø32	45	
	131	

Bore size (mm)	Single acting (Normally Closed)	
	Open side	
ø6	3.7	
ø10	13	
ø16	38	
ø20	57	
ø25	83	
ø32	161	

* At supply pressure of 0.5 MPa, $t = 20$ mm, stroke center

Refer to the LSH-A Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

CKD

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

LCR

STG
STR2

SCG
SSD2
SMG
STG

LSH-A
LSH-G
LSH-F

LSHL-A

LSHL-G
LSHL-F

LST
LSTM

Air Booster
ABP2

SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG

STG
STM
LCR
LCG
STR2

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

SCPD3
CMK2
SCM
SSD2

STG

Supports food mfg. processes


How to order

Without switch (built-in magnet for switch) *3

LSH - A 06 D 1 R ————— **P40 - HP1**

With switch (built-in magnet for switch)

LSH - A 06 D 1 R - SW81 - D - P4 P40 - HP1

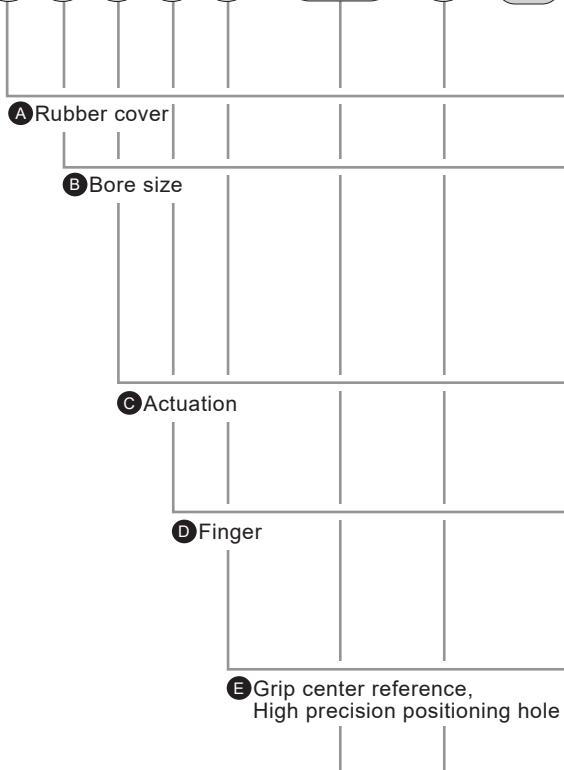

Code	Description
A Rubber cover	
A	Without rubber cover

B Bore size (mm)	
06	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

C Actuation	
D	Double acting
S	Single acting/Normally Open
C	Single acting/Normally Closed

D Finger * Refer to the Dimensions for details.	
1	Basic
2	Side tap
3	Through hole
4	Flat

E Grip center reference, high precision positioning hole	
N	None
L	Refer to the figure at left.
R	

F Switch model No.	
Blank	No switch, with F type switch rail
N	No switch, no switch rail
A	No switch, with T type switch rail (ø32 only)

Refer to the compatibility table on pages 198 to 201 for switch model No.

G Switch quantity	
R	1 on open side
H	1 on closed side
D	2

*1: If the one with the switch is selected, the product comes with a rail plate corresponding to the switch.


*2: Only ø32 can be selected for the T-switch

*3: When without switch, HP1 supports P4 specifications

Switch mounting availability table

Model No.	Switch model No.	Side mounting	Rail mounting
LSH-A06	F2/3 □	●	—
	F2/3S	—	●
LSH-A10	F2/3 □	●	●
	F2/3S	●	●
LSH-A16	F2/3 □	●	●
	F2/3S	●	●
LSH-A20	F2/3 □	●	●
	F2/3S	●	●
LSH-A25	F2/3H□PH	—	●
	F2/3V□PV	●	●
	F2/3S	●	●
LSH-A32	F2/3 □	●	●
	F2/3S	●	●
	T2/3 □	—	●

Grip center reference, High precision positioning hole position diagram

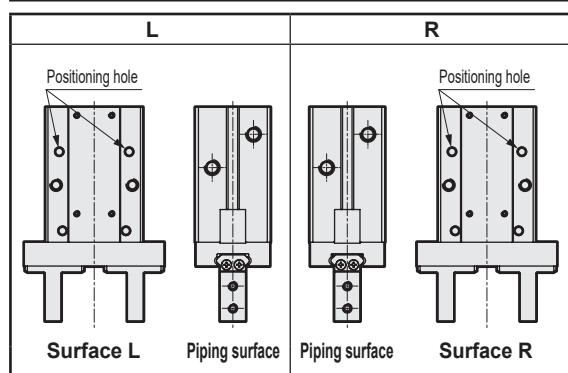


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
LCG	
STM	
STG	
STS	
STL	
LST	Linear Slide Hand
LSTM	Low-profile long stroke hand
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	



Linear slide hand Double acting/Single acting with rubber cover
LSH-G/LSH-F-P4/P40-HP1 Series

●Operating Stroke: 4, 6, 10, 14, 22mm

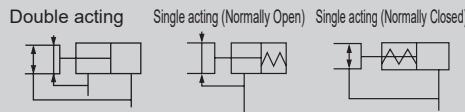


Specifications

Descriptions		LSH-G, F-P4/P40-HP1					
LCG	Bore size mm	ø6	ø10	ø16	ø20	ø25	ø32
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)					
STG	Working fluid	Compressed air					
STR2	Max. working pressure MPa	0.7					
SCPD3	Min. working pressure MPa	0.15	0.2	0.1			
CMK2	Double acting	0.3	0.35	0.25			-
SCM	Single acting						
SCG	Port size	M3		M5			
SSD2	Ambient temperature °C	-10 to 60 (no freezing)					
SMG	Operating Stroke mm	4	6	10	14	22	
LCR	Repeatability mm	±0.01					
STG	Weight Double acting (single acting) kg	0.033	0.07	0.15	0.3 (0.35)	0.53 (0.535)	0.81
STS	Lubrication	Not available					
STL							

Gripping power

Refer to pages 194 to 197 for details.

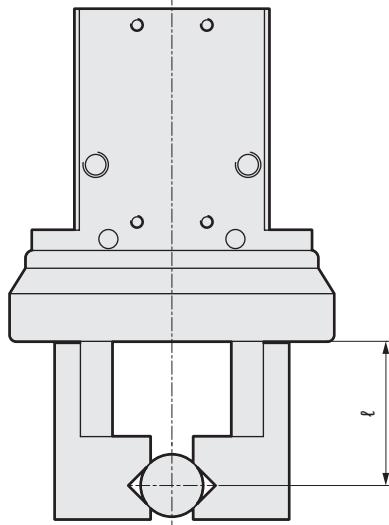

Bore size (mm)	Double acting	
	Open side	Closed side
ø6	6.1	3.3
ø10	17	9.8
ø16	40	30
ø20	66	42
ø25	104	65
ø32	193	158

Bore size (mm)	Single acting (Normally Open)	
	Closed side	
ø6	1.9	
ø10	6.3	
ø16	24	
ø20	28	
ø25	45	

Bore size (mm)	Single acting (Normally Closed)	
	Open side	
ø6	3.7	
ø10	12	
ø16	31	-
ø20	56	
ø25	83	

* At supply pressure of 0.5 MPa, $\ell = 20$ mm, stroke center

Refer to the LSH-G/LSH-F Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LCR
STM
STG

SSD2
SMG
LCR
STM
STG

Linear Slide Hand

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Low-profile long stroke hand

LST
LSTM

Compatible with rechargeable batteries

ABP2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STG

LSH-G/LSH-F-P4/P40-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch) *3

LSH - G 06 D 1 R ————— **P40 - HP1**

With switch (built-in magnet for switch)

LSH - G 06 D 1 R - SW81 - D - P4 P40 - HP1

A Rubber cover

B Bore size

C Actuation

D Finger

E Grip center reference,
High precision positioning hole

F Switch model No.

G Switch
quantity

Code	Description
A Rubber cover	
G	Chloroprene rubber
F	Fluoro rubber

Code	Description
B Bore size (mm)	
06	ø6
10	ø10
16	ø16
20	ø20
25	ø25
32	ø32

Code	Description
C Actuation	
D	Double acting
S	Single acting / Normally Open (ø32 cannot be selected)
C	Single acting/Normally Closed (ø32 cannot be selected)

Code	Description
D Finger	

1	Basic
----------	-------

Code	Description
E Grip center reference, high precision positioning hole	
N None	
L	Refer to the figure at left.
R	

Code	Description
F Switch model No.	
Blank No switch, with F type switch rail	
N	No switch, no switch rail
A	No switch, with T type switch rail (ø32 only)

Refer to the switch model No. Refer to the compatibility table on pages 198 to 201.


Code	Description
G Switch quantity	
R 1 on open side	
H	1 on closed side
D	2

*1: If the one with the switch is selected, the product comes with a rail plate corresponding to the switch.

*2: Only ø32 can be selected for the T-switch

*3: When without switch, HP1 supports P4 specifications

Grip center reference, High precision positioning hole position diagram

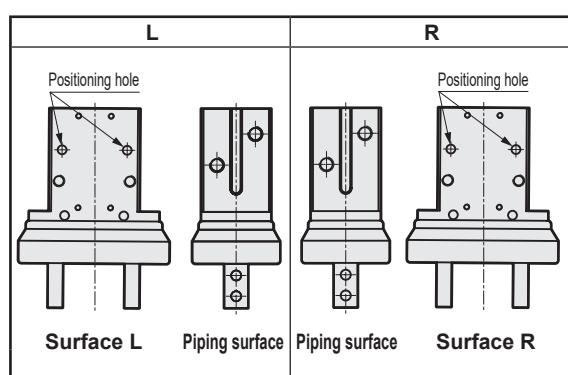

Switch mounting availability table


Model No.	Switch model No.	Side mounting	Rail mounting
LSH-G/F06	F2/3 □	●	-
	F2/3S	-	●
LSH-G/F10	F2/3 □	●	●
	F2/3S	●	●
LSH-G/F16	F2/3 □	●	●
	F2/3S	●	●
LSH-G/F20	F2/3 □	●	●
	F2/3S	●	●
LSH-G/F25	F2/3H, PH, PV	-	●
	F2/3V	●	●
	F2/3S	●	●
LSH-G/F32	F2/3 □	●	●
	F2/3S	●	●
	T2/3 □	-	●

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Booster
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Linear slide hand Long stroke Double acting/Single acting

LSHL-A-P4/P40-HP1 Series

●Operating Stroke: 8, 12, 18, 22mm

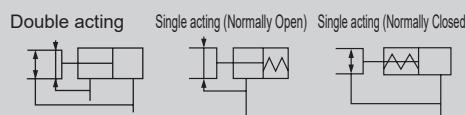


Specifications

Descriptions		LSHL-A-P4/P40-HP1				
LCG	Bore size mm	ø10	ø16	ø20	ø25	
STM	Actuation	Double acting/single acting (Normally Open/Normally Closed)				
STG	Working fluid	Compressed air				
STR2	Max. working pressure MPa	0.7				
SCPD3	Min. working pressure MPa	Double acting 0.2	0.1			
CMK2	Single acting 0.35	0.25				
SCM	Port size	M3	M5			
SSD2	Ambient temperature °C	-10 to 60 (no freezing)				
SMG	Operating Stroke mm	8	12	18	22	
LCR	Repeatability mm	±0.01				
STG	Weight Double acting (Single acting) kg	Finger OP: 1, 2, 3 Finger OP: 4	0.065 (0.075)	0.155 (0.165) 0.16 (0.17)	0.315 (0.335) 0.32 (0.34)	0.54 (0.585) 0.545 (0.59)
STS	Lubrication	Not available				
STL						

Gripping power

Refer to pages 194 to 197 for details.

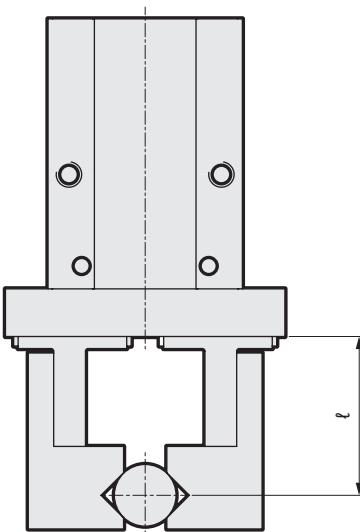

Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42
ø25	104	65

Bore size (mm)	Single acting (Normally Open)	
	Open side	Closed side
ø10	-	7.1
ø16	-	27
ø20	-	33
ø25	-	50

Bore size (mm)	Single acting (Normally Closed)	
	Open side	Closed side
ø10	13	-
ø16	38	-
ø20	57	-
ø25	85	-

* At supply pressure of 0.5 MPa, $l = 20$ mm, stroke center

Refer to the LSHL-A Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

CKD

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Environment-resistant cylinder

LCR
STM
STG
STR2

SCPD3
CMK2
SCM

SCG
SSD2
SMG
LCR
STG
STS
STL

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Linear Slide Hand

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

LST
LSTM

Air Booster

ABP2
SCPD3
CMK2

SCM
SSD2
MSD
MSDG-L
SMG
STG

STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Compatible with rechargeable batteries

SCPD3
CMK2
SCM

SCG
SSD2
STG

Supports food mfg. processes

SCPD3
CMK2
SCM

SSD2
STG

LSHL-A-P4/P40-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch) *2

LSHL - A 10 D 1 R ————— P40 - HP1


With switch (built-in magnet for switch)
LSHL - A 10 D 1 R - SW81 - D - P4 P40 - HP1

Code	Description
A Rubber cover	
A	Without rubber cover
B Bore size (mm)	
10	ø10
16	ø16
20	ø20
25	ø25
C Actuation	
D	Double acting
S	Single acting/Normally Open
C	Single acting/Normally Closed
D Finger	* Refer to the Dimensions for details.
1	Basic
2	Side tap
3	Through hole
4	Flat
E Grip center reference, high precision positioning hole	
N	None
L	
R	Refer to the figure at left.
F Switch model No.	
Blank	Without switch, rail plate attached
N	Without switch or rail plate
Refer to the compatibility table on pages 198 to 201 for switch model No.	
G Switch quantity	
R	1 on open side
H	1 on closed side
D	2

*1: When selecting "With switch" a rail plate is attached

*2: When without switch supports P4 specifications with HP1

Grip center reference, high precision positioning hole position diagram

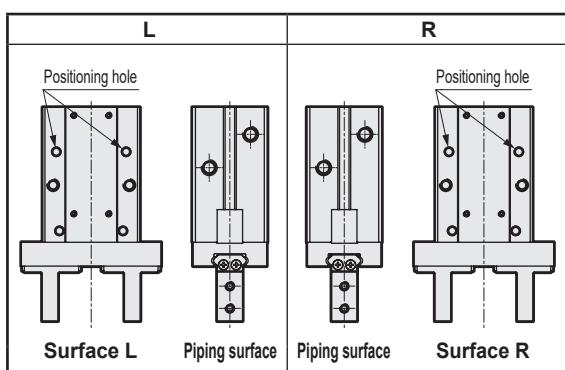

Switch mounting availability table


Model No.	Switch model No.	Side mounting	Rail mounting
LSHL-A10	F2/3 □	●	●
	F2/3S	●	●
LSHL-A16	F2/3 □	●	●
	F2/3S	●	●
LSHL-A20	F2/3 □	●	●
	F2/3S	●	●
LSHL-A25	F2/3 □	●	●
	F2/3S	●	●

Long service life cylinder
SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR
LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SSD2
SMG
LCR
LCG
STR2
SCPD3
CMK2
SCM
SSD2
SMG
LCR
LCG
STR2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
LCR
LCG
STR2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
LSHM-A
LSHM-G
LSHM-F
LST
LSTM
Air Booster
ABP2
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
SCPD3
CMK2
SCM
SSD2
MSD
MSDG-L
SMG
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F
SCPD3
CMK2
SCM
SSD2
STG



Linear slide hand, Long stroke double acting with rubber cover LSHL-G/LSHL-F-P4/P40-HP1 Series

● Operating Stroke: 8, 12, 18mm




Specifications

Descriptions	LSHL-G, F-P4/P40-HP1			
LCG	Bore size mm	ø10	ø16	ø20
STM	Actuation	Double acting		
STG	Working fluid	Compressed air		
STR2	Max. working pressure MPa	0.7		
SCPD3	Min. working pressure MPa	0.2	0.1	
CMK2	Port size	M3	M5	
SCM	Ambient temperature °C	-10 to 60 (no freezing)		
SSD2	Operating Stroke mm	8	12	18
SMG	Repeatability mm	±0.01		
LCR	Weight kg	0.09	0.18	0.39
STG	Lubrication	Not available		
STS				
STL				

Gripping power

Refer to pages 194 to 197 for details.

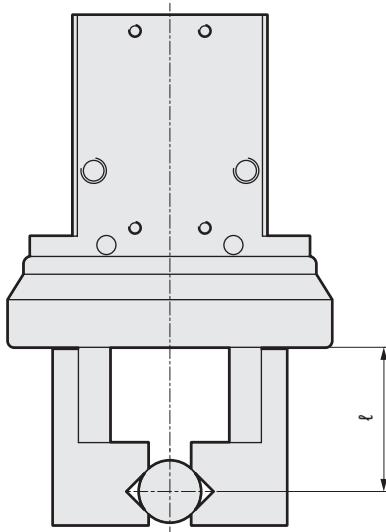

Bore size (mm)	Double acting	
	Open side	Closed side
ø10	17	11
ø16	45	34
ø20	66	42

* At supply pressure of 0.5 MPa, $l = 20$ mm, stroke center

Refer to the LSHL-G/LSHL-F Series of "Linear Slide Hand LSH-HP Series (No.CC-1419A)" for dimensions.

LSHL-G/LSHL-F-P4/P40-HP1 Series

How to order


How to order

Without switch (built-in magnet for switch) *2

LSHL - G 10 D 1 R ————— **P40 - HP1**

With switch (built-in magnet for switch)

LSHL - G 10 D 1 R - **SW81** - **D** - **P4 P40** - **HP1**

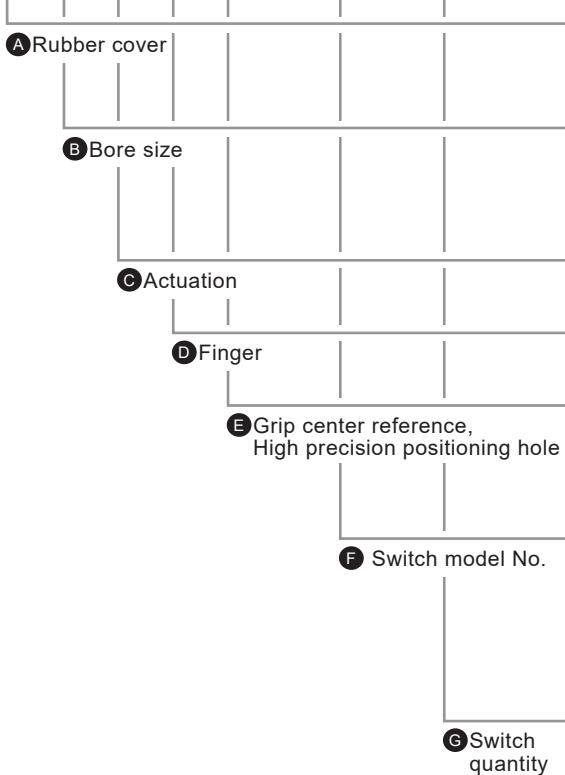


Code	Description
A Rubber cover	
G	Chloroprene rubber
F	Fluoro rubber
B Bore size (mm)	
10	ø10
16	ø16
20	ø20
C Actuation	
D	Double acting
D Finger	
1	Basic
E Grip center reference, high precision positioning hole	
N	None
L	Refer to the figure at left.
R	
F Switch model No.	
Blank	Without switch, rail plate attached
N	Without switch or rail plate
Refer to the compatibility table on pages 198 to 201 for switch model No.	
G Switch quantity	
R	1 on open side
H	1 on closed side
D	2

*1: When selecting "With switch", a rail plate is attached.

*2: When without switch, supports P4 specifications with HP1

Grip center reference,High precision positioning hole position diagram

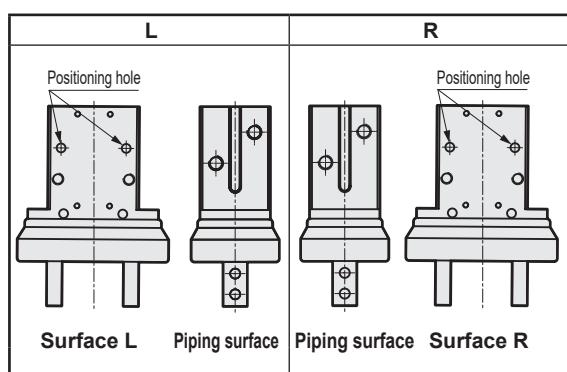

Switch mounting availability table

Model No.	Switch model No.	Side mounting	Rail mounting
LSHL-G/F10	F2/3 □	●	●
	F2/3S	●	●
LSHL-G/F16	F2/3 □	●	●
	F2/3S	●	●
LSHL-G/F20	F2/3 □	●	●
	F2/3S	●	●



SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	Environment-resistant cylinder
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food handling processes
CMK2	
SCM	
SCG	
SSD2	
STG	

LSH-A/LSHL-A-P4/P40-HP1 Series


Gripping power performance data LSH-A**D/LSHL-A**D (double acting)

- Gripping power indicates the thrust (one finger) in the direction of the arrow shown in the figure.
- The gripping power operating in the opening/closing directions against the length (ℓ) of the attachment when the supply pressure is 0.7 MPa or less is shown.


- Open direction (←)
- Close direction (→)

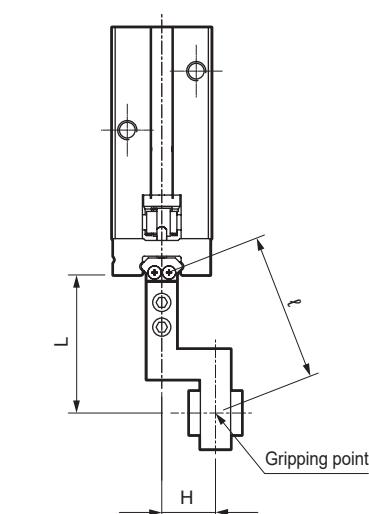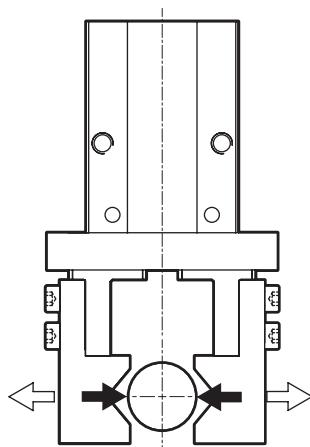


Close direction

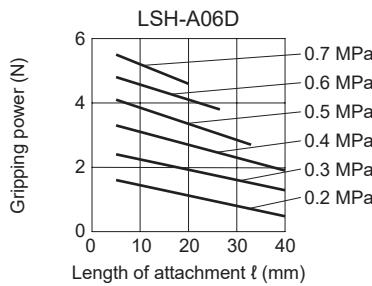


Open direction

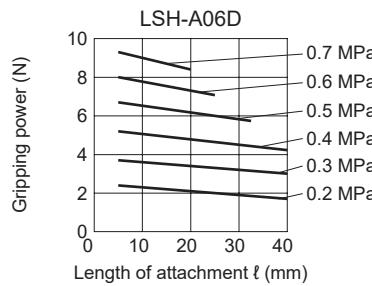


LSH-A06D

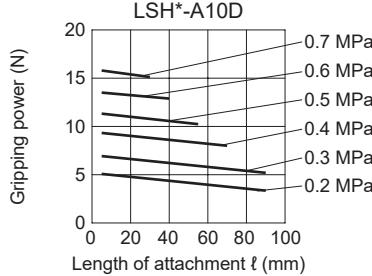


LSH*-A10D

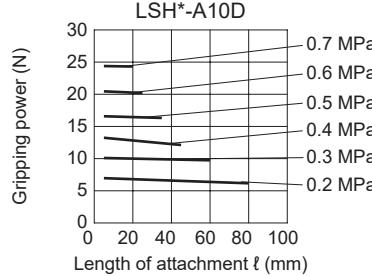


LSH*-A10D

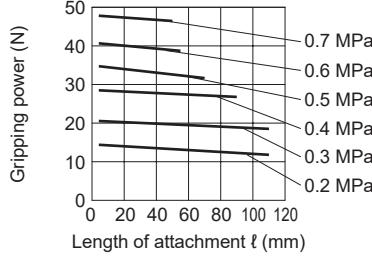


LSH*-A16D

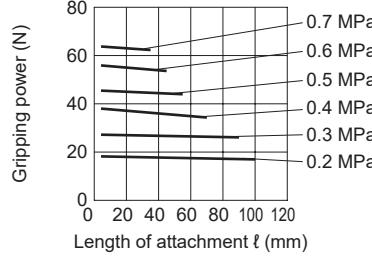


LSH*-A16D

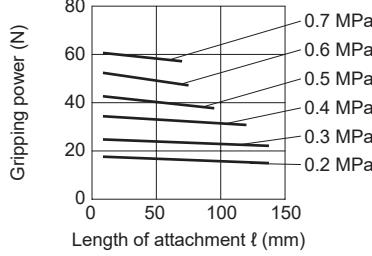


LSH*-A20D

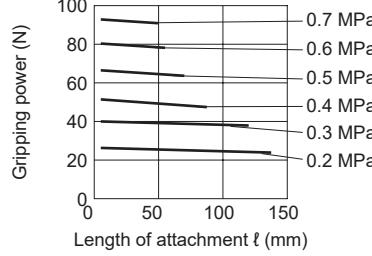


LSH*-A20D

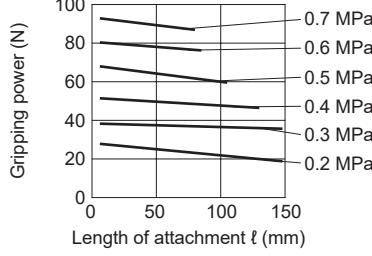


LSH*-A25D

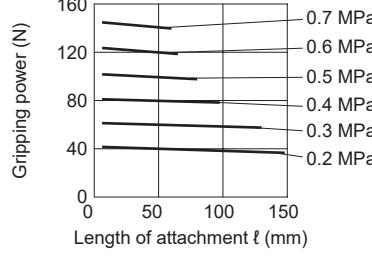

LSH*-A25D

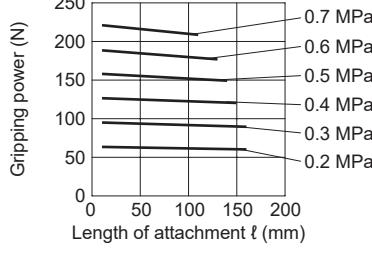

LSH-A32D

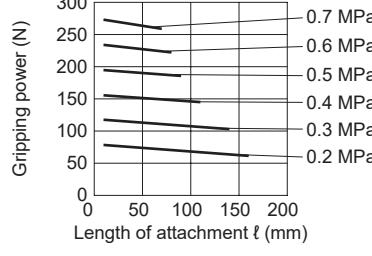

LSH-A32D

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
Air Booster	
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
Supports food mfg. processes	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	


LSH-A/LSHL-A-P4/P40-HP1 Series

Gripping power performance data







Gripping power performance data LSH-A**S/C, LSHL-A**S/C (single acting)

- Gripping power indicates the thrust (one finger) in the direction of the arrow shown in the figure.
- The gripping power operating in the opening/closing directions against the length () of the attachment when the supply pressure is 0.7 MPa or less is shown.







- Open direction (←)
- Close direction (→)

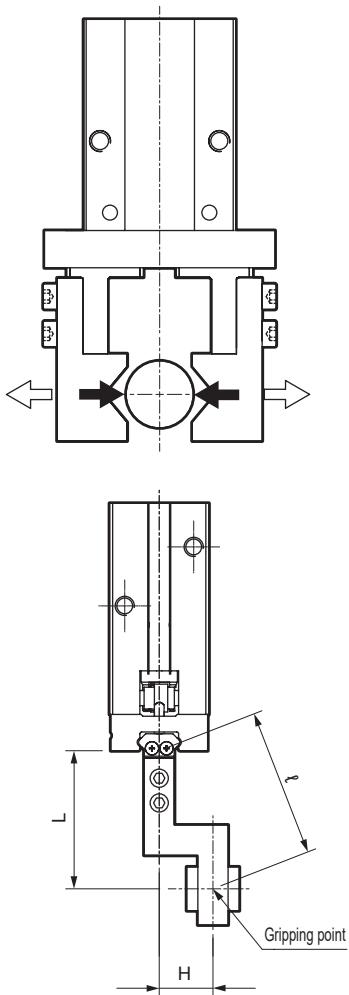

Close direction

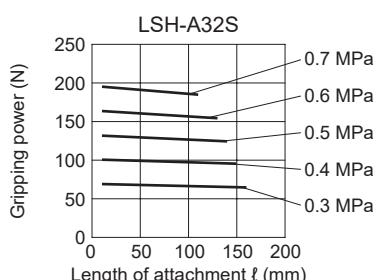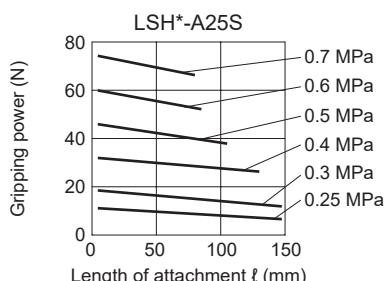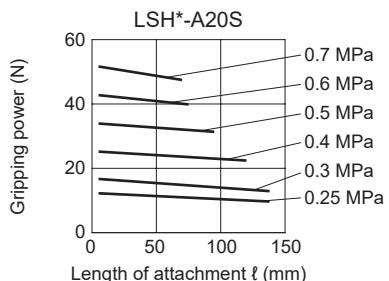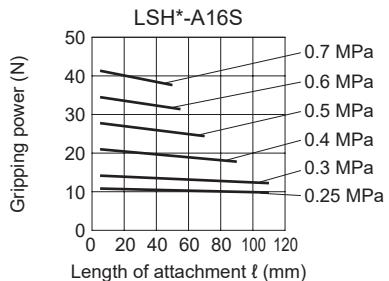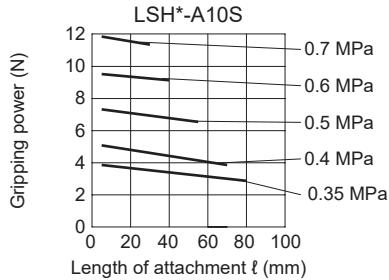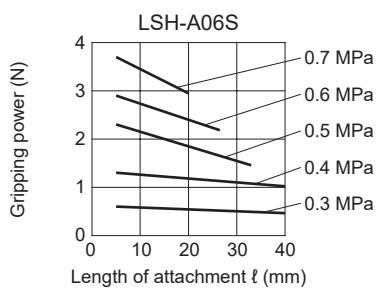

Open direction

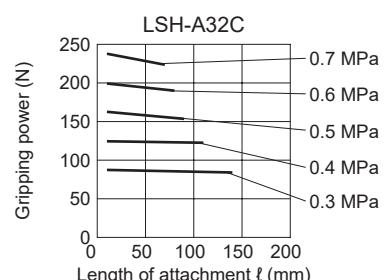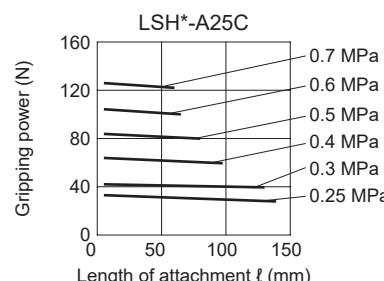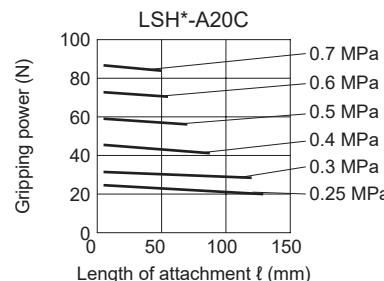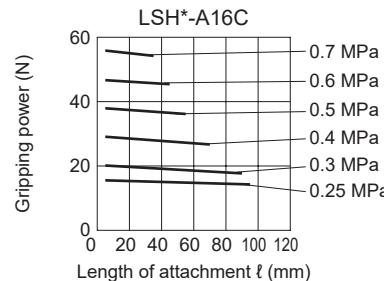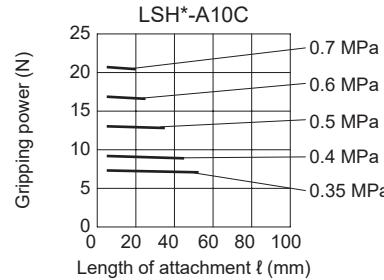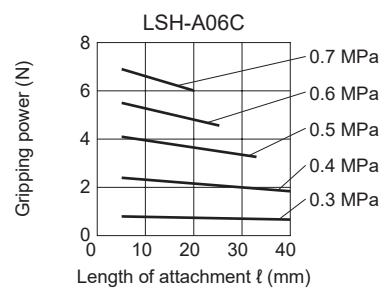



SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSH-A	Low-profile long stroke hand
LSH-G	
LSH-F	
LST	Air Booster
LSTM	
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	Supports food processing
LSH-G	
LSH-F	
LSH-A	
LSH-G	
LSH-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

LSH-G/LSHL-G-P4/P40-HP1 Series


Gripping power performance data LSH-G/F**D □ LSHL-G/F**D (double acting)

- Gripping power indicates the thrust (one finger) in the direction of the arrow shown in the figure.
- The gripping power operating in the opening/closing directions against the length () of the attachment when the supply pressure is 0.7 MPa or less is shown.


- Open direction (←)
- Close direction (→)

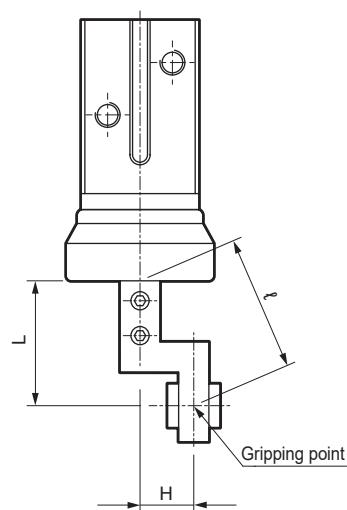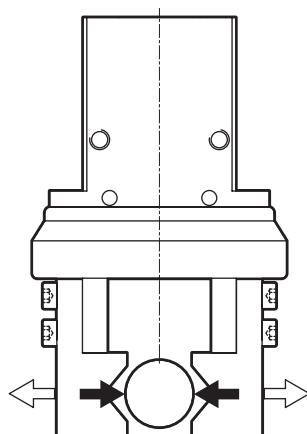


Close direction

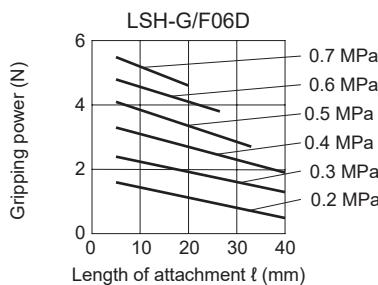


Open direction

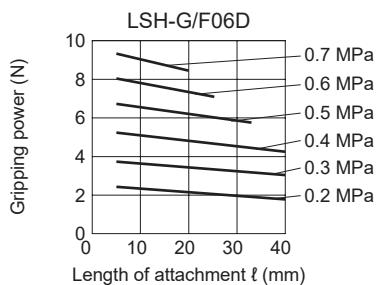


LSH*-G/F10D

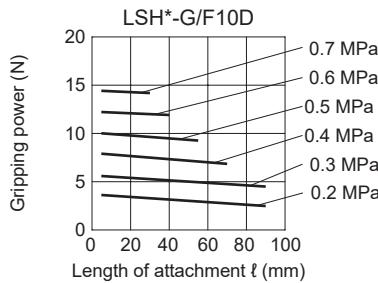


LSH*-G/F10D

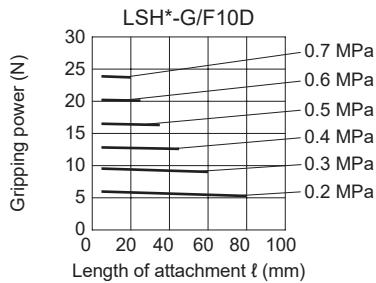


LSH*-G/F16D

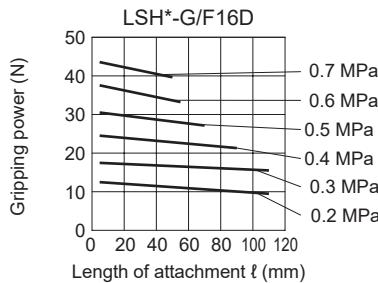


LSH*-G/F16D

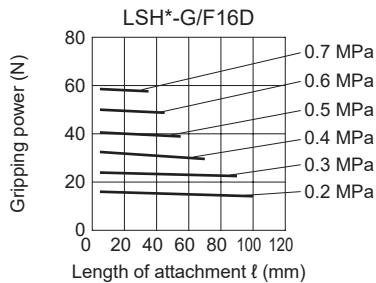


LSH*-G/F20D

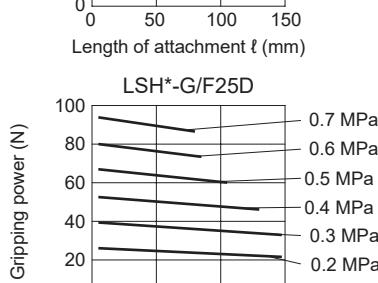


LSH*-G/F20D

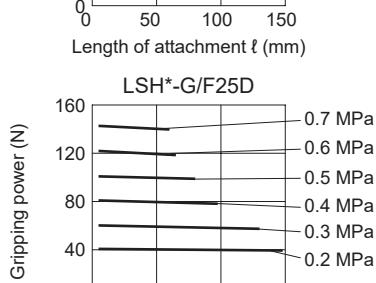


LSH*-G/F25D

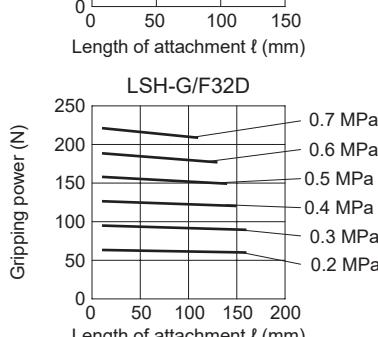


LSH*-G/F25D

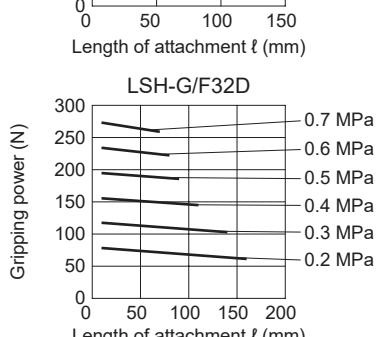

LSH-G/F32D

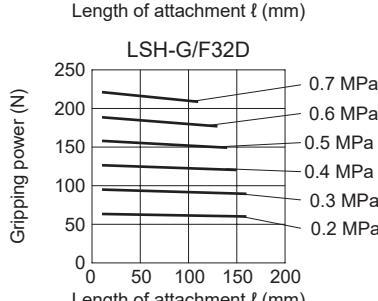

LSH-G/F32D

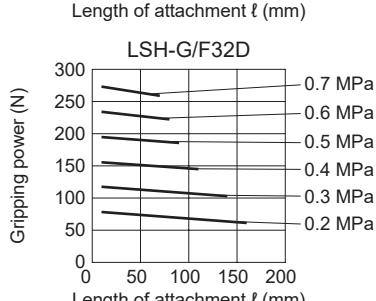

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STS	
STL	
Air Booster	
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
Supports food mfg. processes	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	


LSH-G/LSH-F-P4/P40-HP1 Series

Gripping power performance data


Gripping power performance data LSH-G/F**S/C (single acting)

- Gripping power indicates the thrust (one finger) in the direction of the arrow shown in the figure.
- The gripping power operating in the opening/closing directions against the length () of the attachment when the supply pressure is 0.7 MPa or less is shown.











- Open direction (←)
- Close direction (→)

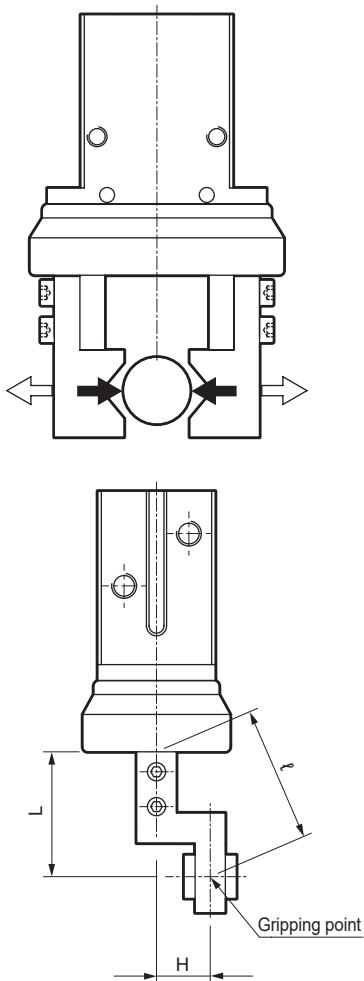

Close direction

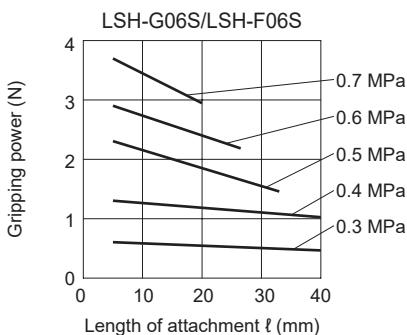

Open direction

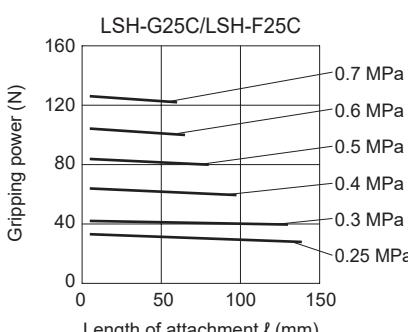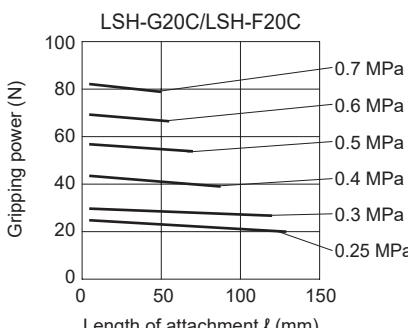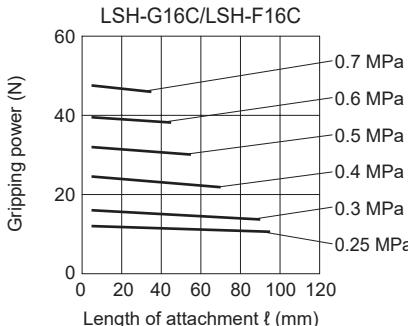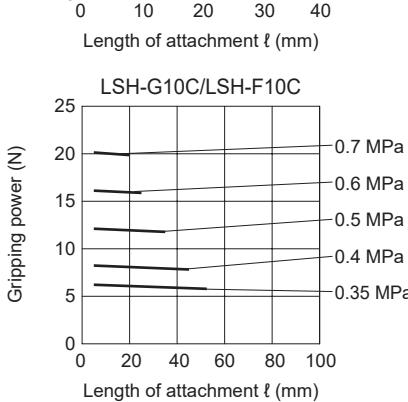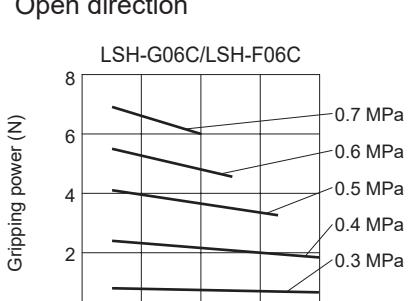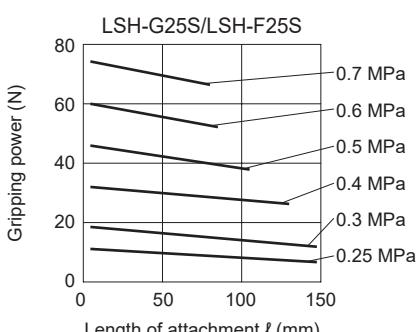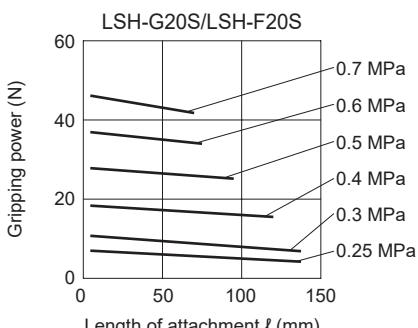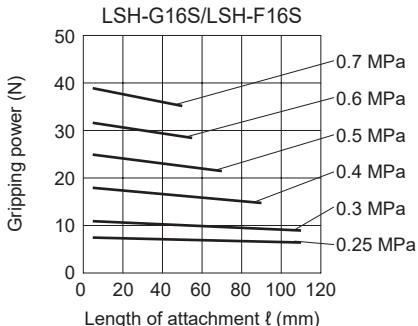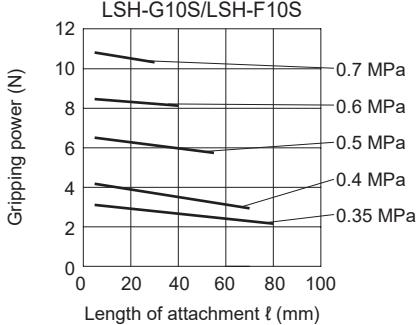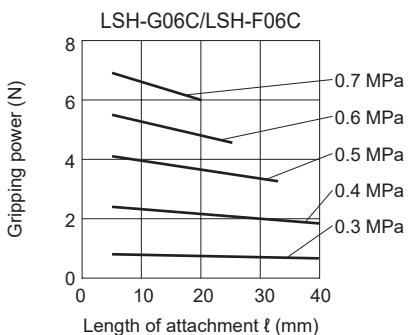

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	Environment-resistant cylinder
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
MSD	
MSDG-L	
SMG	Low-profile long stroke hand
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Air Booster
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	Compatible with rechargeable batteries
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	
LSTM	
ABP2	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Switch Compatibility Table (axial lead wire takeout)

*1: The cylinder equipped model No. is the order model No. in the table below.

*2: For discrete switch model numbers, add -P4 to the end of the basic switch model number in the table below.

*3: * products are with resin connectors.

Long service life cylinder	1. The cylinder equipped model No. is the order model No. in the table below. *2: For discrete switch model numbers, add -P4 to the end of the basic switch model number in the table below. *3: * products are with resin connectors.									
	Compatibility		Shape		T type					
	Order model No.		Basic model No.		T0H	SW69	T0H3	SW28	T0H5	SWAK
	Cylinder model No.				T5H	SW17	T5H3	SW29	T5H5	SW27
	SCPD3		T2H		T2H	SW11	T2H	SW18	T2H3	SW12
	CMK2		T2H5		T2H5	SW13	T2HR3	SW49	T3H	SW21
	SCM		T3H3		T3H5	SW23	T2WH	SW40	T3WH3	SW47
	SCG		T2WH5		T2WH	SW39	T2WH5	SWAG	T3WH	SWAJ
	SSD2 (ø12/ø16)		T3WH3		T3WH3	SWBK	T3WH5	SWBL	T4H	SW19
Environment-resistant cylinder	SSD2 (ø20/ø25)		T8H		T8H3	SWBW	T8H5	SWCC	T1H	SWAN
	STG		T1H3		T1H3	SWCU	T1H5	SWCV	T3PH	SWCZ
	STS		T2YH3		T2YH3	SW32	T2YH5	SW33	T3PH3	SWAQ
	STL		T2YH5		T2YH5	SW31	T2YH	SW38	T3PH5	SWBE
	LSH-A		T3PH		T3PH	SW32	T3PH	SW33	T3PH	SW34
	MSD									
	LSH-G									
	LSH-F									
	LSHL-A									
	LSHL-G									
Linear Slide Hand	LSHL-F									
	SMG									
	STG									
	STS									
	STL									
	LSH-A									
	MSD									
	LSH-G									
	LSH-F									
	LSHL-A									
Compatible with rechargeable batteries	LSHL-G									
	LSHL-F									
	STL									
	LSH-HP1									
	LST									
	LSTM									
	ABP2									
	SCPD3									
	CMK2									
	SCM									
Supports food mfg. processes	SSD2									
	MSD									
	MSDG-L									
	SMG									
	STG									
	STM									
	LCR									
	LCG									
	STR2									
	LSH-A									
Compatible with rechargeable batteries	LSH-G									
	LSH-F									
	LSHL-A									
	LSHL-G									
	LSHL-F									
	STL									
	LSH-HP1									
	LST									
	LSTM									
	ABP2									
Supports food mfg. processes	SCPD3									
	CMK2									
	SCM									
	SCG									
	SSD2									
	STG									
	STR2									
	LSH-A									
	LSH-G									
	LSH-F									

Switch compatibility table

Axial lead wire

	T type	F Model	K Model	Long service life cylinder	Environment-resistant cylinder	Linear Slide Hand	Low-profile long stroke hand	ABP2 Air Booster	Compatible with rechargeable batteries	Supports food processing
	T3YH SW41	F0H SWAL	K0H SWCA	SCPD3 CMK2 SCM SSD2 MDC2 MSD MSDG-L SMG LCR LCG STM STG STR2 SCPD3 CMK2 SCM SCG SSD2 SMG LCR STG STS STL LSH-A LSH-G LSH-F LSHL-A LSHL-G LSHL-F LSHM-A LSHM-G LSHM-F						
	T3YH3 SW42	F0H3 SWEA	K0H3 SW59							
	T3YH5 SW43	F2H SW81	K0H5 SWCD							
	T2JH SWDU	F2H SW89	K5H SWCG							
	T2JH3 SWDV	F2H3 SW82	K5H3 SWCH							
	T2JH5 SWDW	F3H SW85	K2H SW58							
		F3H3 SW86	K2H3 SW52							
		F3PH SWEE	K2H5 SW53							
		F3PH3 SWEF	K3H SW61							
		F2YH SWBV	K3H3 SW62							
		F2YH3 SW79	K3H5 SW63							
		F3YH SWBD	K3PH SWFG							
		F3YH3 SWEN	K3PH3 SWFM							
			K2YH SWFN							
			K2YH5 SW67							
			K3PH K2YH SW57							
			K2YH3 SWAR							
			K2YH5 SWFP							
			K3YH SWBA							
			K3YH3 SWFT							
			K3YH5 SWFU							

Switch compatibility table (Lead-out L-type wire)

*1: The cylinder equipped model No. is the order model No. in the table below.

*2: For discrete switch model numbers, add -P4 to the end of the basic switch model number in the table below.

*3: * products are with resin connectors.

Supports food mfg. processes		Compatible with rechargeable batteries		Linear Slide Hand		Environment-resistant cylinder		Long service life cylinder	
SCPD3	CMK2	SCM	SSD2	MDC2	Compatibility	Shape	T type		
SCPD3	CMK2	SCM	SSD2	MSD					
SCPD3	CMK2	SCM	SSD2	MSDG-L					
SCPD3	CMK2	SCM	SSD2	SMG					
SCPD3	CMK2	SCM	SSD2	LCR					
SCPD3	CMK2	SCM	SSD2	LCG					
SCPD3	CMK2	SCM	SSD2	STM					
SCPD3	CMK2	SCM	SSD2	STG					
STR2					Cylinder model No.				
SCPD3	CMK2	SCM	SSD2	MSD	T0V	SW70			
SCPD3	CMK2	SCM	SSD2	MSDG-L	T0V3	SWBG			
SCPD3	CMK2	SCM	SSD2	SMG	T0V5	SWBH			
SCPD3	CMK2	SCM	SSD2	LCR	T5V	SW20			
SCPD3	CMK2	SCM	SSD2	LCG	T5V3	SWBJ			
SCPD3	CMK2	SCM	SSD2	STM	T5V5	SW30			
SCPD3	CMK2	SCM	SSD2	STG	T2V	SW14			
SCPD3	CMK2	SCM	SSD2	STR2	T2V3	SW15			
SCPD3	CMK2	SCM	SSD2		T2V5	SW16			
SCPD3	CMK2	SCM	SSD2		T3V	SW24			
SCPD3	CMK2	SCM	SSD2		T3V3	SW25			
SCPD3	CMK2	SCM	SSD2		T3V5	SW26			
SCPD3	CMK2	SCM	SSD2		T2WV	SW37			
SCPD3	CMK2	SCM	SSD2		T2WV3	SW48			
SCPD3	CMK2	SCM	SSD2		T2WV5	SWAH			
SCPD3	CMK2	SCM	SSD2		T3WV	SWBM			
SCPD3	CMK2	SCM	SSD2		T3WV3	SWBN			
SCPD3	CMK2	SCM	SSD2		T3WV5	SWBP			
SCPD3	CMK2	SCM	SSD2		T8V	SWDK			
SCPD3	CMK2	SCM	SSD2		T8V3	SWDL			
SCPD3	CMK2	SCM	SSD2		T8V5	SWDM			
SCPD3	CMK2	SCM	SSD2		T1V	SWCW			
SCPD3	CMK2	SCM	SSD2		T1V3	SWCY			
SCPD3	CMK2	SCM	SSD2		T1V5	SWCX			
SCPD3	CMK2	SCM	SSD2		T3PV	SWDE			
SCPD3	CMK2	SCM	SSD2		T3PV3	SWAS			
SCPD3	CMK2	SCM	SSD2		T3PV5	SWDF			
SCPD3	CMK2	SCM	SSD2		T2YV	SW34			
SCPD3	CMK2	SCM	SSD2		T2YV3	SW35			
SCPD3	CMK2	SCM	SSD2		T2YV5	SW36			
SCPD3	CMK2	SCM	SSD2		T3YV	SW44			
SCPD3	CMK2	SCM	SSD2		T3YV3	SW45			
SCPD3	CMK2	SCM	SSD2		T3YV5	SW46			

Switch compatibility table

Lead-out L-type wire

Food manufacturing process compatible component



CONTENTS

● Environment-resistant cylinder	Pencil shaped cylinder (SCPD3-G-FP1-HP1)	206
	Small bore size cylinder (CMK2-G-FP1-HP1)	208
	Round shaped cylinder (SCM-G-FP1-HP1)	210
	Tie rod cylinder (SCG-G-FP1-HP1)	212
	Compact cylinder (SSD2-G-FP1-HP1)	214
	Guided cylinder (STG-G-FP1-HP1)	218
⚠ Precautions for use		222

Environment-resistant cylinder series variation

Model No.	Bore size (mm)	Stroke (mm)
SCPD3-G-FP1-HP1	ø6/ø10/ø16	5 to 270
CMK2-G-FP1-HP1	ø20/ø25/ø32/ø40	5 to 750
SCM-G-FP1-HP1	ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	10 to 1500
SCG-G-FP1-HP1	ø32/ø40/ø50/ø63/ø80/ø100	1 to 1500
SSD2-G-FP1-HP1	ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	1 to 100
STG-G-FP1-HP1	ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100	5 to 400

⚠ Read the safety precautions in "Pneumatic Cylinders" (Catalog No.CB-029SA and CB-030SA) and "Equipment for Food Manufacturing Processes FP Series" (Catalog No.CC-1271A) before use.

⚠ CAUTION

- Some models use oil-impregnated bearings, and oil may be discharged outside of the cylinder.
Do not use in places susceptible to oil.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	
ABP2	Air Booster
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

For food manufacturing processes Reduced

Satisfies a variety of needs for food processing

A broad standard lineup ranging from air filters to actuators that can be used safely and securely in food manufacturing processes. We offer total support for food manufacturing with total engineering capacity in packaging machines as well as pneumatic, fluid control, and electric-driven products.



FP1 Series

Lubricant



Eliminates concerns over lubricant contamination!

Lubricant used in flow paths and sliding parts is changed to food-grade (NSF-H1), eliminating concerns over contamination caused by lubricant. The materials and dimensions are the same as those of the standard products



This logo represents CKD's stance to provide you with safe components for supporting your food manufacturing processes.

FP2 Series

Uses safe materials!

Lubricant Materials Environment

In addition to FP1, the flow path uses Food Sanitation Act compliant materials (resin, rubber)

CO₂ emissions from long service life products

Contributes to carbon neutrality by reducing maintenance and improving productivity.



Contributes to carbon neutrality by reducing maintenance and improving productivity.

- Reduce production loss and waste
- Durable
- Rapid replacements
- Early service-life notice

Contributes to food safety and security in food manufacturing processes.



Contributes to food safety and security in food manufacturing processes.




Eliminates concerns over lubricant contamination

Environment-resistant cylinder For food manufacturing processes

FP1 - G-HP1 Series

- Unexplained stops significantly reduced
- Number of replacements Significantly reduced
- Environmental resistance improved
- Durability count 5 million cycles and over

Subject to CKD prescribed conditions

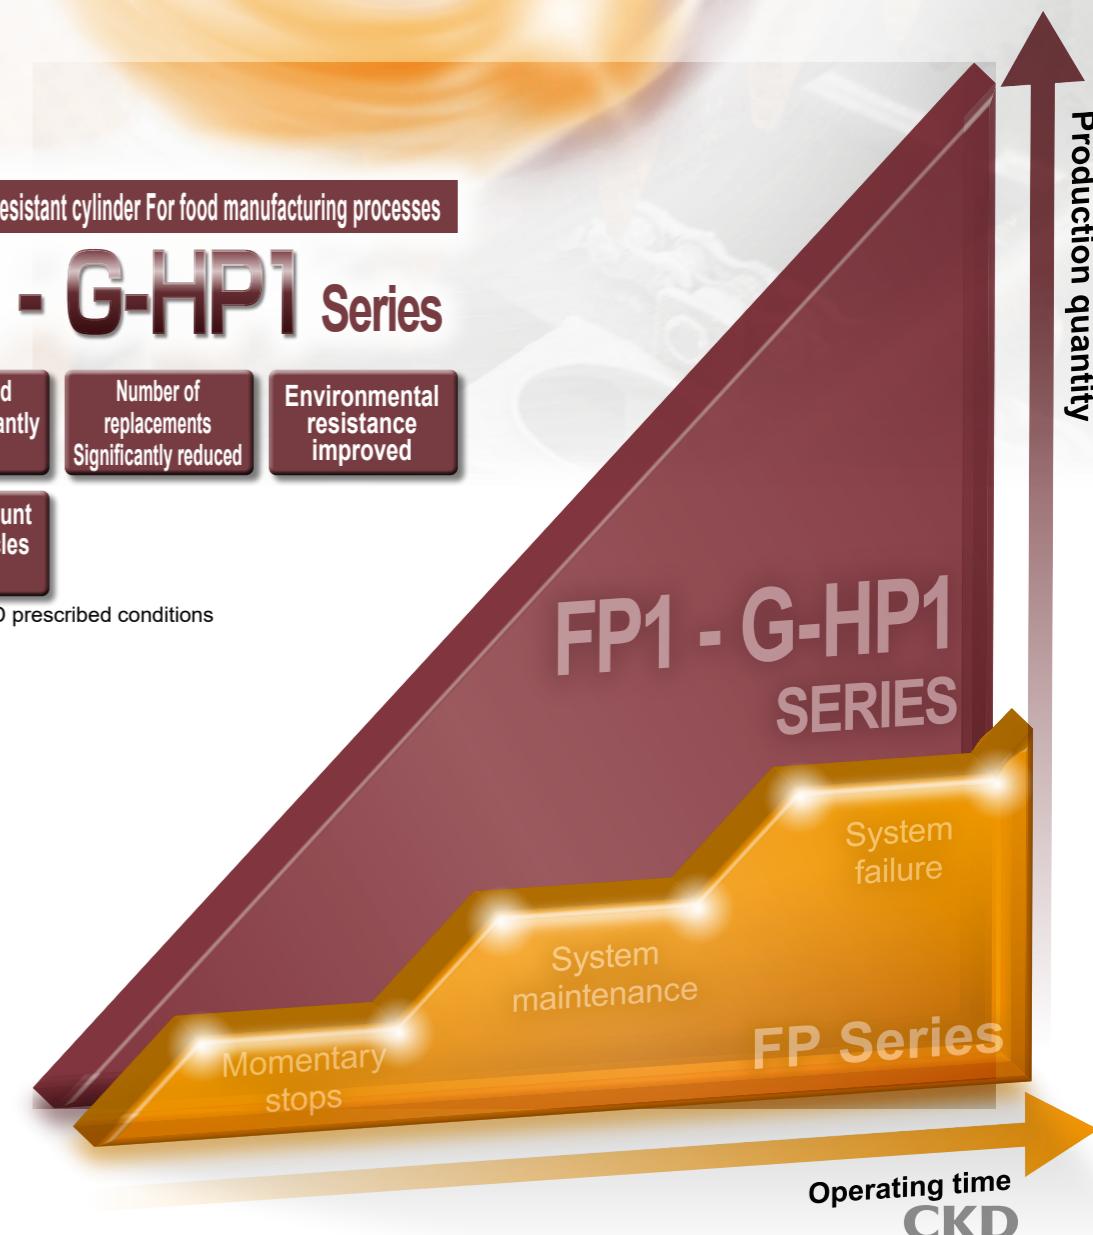

Pencil cylinder
Double acting/Single rod/Rubber scraper

SCPD3-G-FP1-HP1 Series

● Bore size:ø6/ø10/ø16

JIS symbol




Long service life cylinder

Environment-resistant cylinder

Linear Slide Hand

Compatible with rechargeable batteries

Supports food mfg. processes

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Specifications

	SCPD3-G-FP1-HP1 SCPD3-GL-FP1-HP1 (with switch)				
LCR	Item	ø6	ø10		
LCG	Bore size mm	ø6	ø10		
STM	Actuation	Double acting			
STG	Working fluid	Compressed air			
STR2	Max. working pressure MPa	1.0			
SCPD3	Min. working pressure MPa	0.15	0.1		
CMK2	Proof pressure MPa	1.6			
SCM	Ambient temperature °C	-10 to 60 (no freezing)			
SSD2	Port size	M5			
SCG	Stroke tolerance mm	+1.0 0			
SMG	Working piston speed mm/s	50 to 750			
LCR	Cushion	With rubber cushion			
STG	Lubrication	Not required			
STS	Allowable absorbed energy J	0.012	0.041	0.162	
STL	LSH-A				
LSH-G	LSH-F				
LSHL-A	LSHL-G				
LSHL-F	LSHM-A				
LSHM-G	LSHM-F				
LST	Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Available Stroke (mm)	Min. Stroke (mm)
LSTM	ø6	15/30/45/60	100	105	5
LSTM	ø10		200	210	
LSTM	ø16		260	270	

*1: The custom Stroke is available in 1 mm increments.

Stroke

	Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Available Stroke (mm)	Min. Stroke (mm)
LSHM-A	ø6	15/30/45/60	100	105	5
LSHM-G	ø10		200	210	
LSHM-F	ø16		260	270	

Refer to the SCPD3-G-HP1 Series on page 51 for dimensions.

How to order

Without switch(without magnet for switch)

SCPD3-G - 00 - 10 - 15 - O - FP1 Y - HP1

With switch(built-in magnet for switch)

SCPD3-GL - 00 - 10 - 15 - O - T2H - R - FP1 Y - HP1

A Model No.

B Mounting *1

C Bore size

D Stroke

⚠ Precautions for model No. selection

*1: Mounting type "CB" is not available when the port direction is "0" (axial direction).

*2: Refer to SCPD3-G-HP1 Series on page 48 for the min. Stroke with switch.

*3: Magnet is not built into the type without switch.

*4: "I" and "Y" cannot be selected together.

*5: Switches are shipped with the product.

[Example of model No.]

SCPD3-GL-00-10-30-O-T2H-R-FP1I-HP1

Model: Pencil shaped cylinder Food-grade grease specifications

A Model No.	:Double acting/single rod/rubber scraper/with switch
B Mounting	: Basic
C Bore size	: ø10 mm
D Stroke	: 30mm
E Head side port direction	: Axial direction
F Switch model No.	: Proximity switch T2H, lead wire 1 m
G Switch quantity	: 1 on rod side
H Accessory	: Rod eye

How to order mounting brackets

Bore size (mm)	ø6	ø10	ø16
Mounting bracket			
Foot (LS)	P2-LS-6	P2-LS-10	P2-LS-16
Flange (FA)	P2-FA-6	P2-FA-10	P2-FA-16

Note: The foot (LS) type mounting bracket is provided as 1 pc./set.

How to order accessories

Bore size (mm)	ø10	ø16
Accessory		
Rod eye (I)	P2-I-10-FP1	P2-I-16-FP1
Rod clevis (Y)	P2-Y-10-FP1	P2-Y-16-FP1
Eye bracket (B1)	P2-B1-10-FP1	P2-B1-16-FP1
Clevis bracket (B2)	P2-B2-10-FP1	P2-B2-16-FP1

G Switch quantity

H Accessory *4

Code	Description		
A Model No.			
SCPD3-G	Double acting/single rod/rubber scraper		
SCPD3-GL	Double acting/single rod/rubber scraper/with switch		

B Mounting

Bore size (ø)	6	10	16
00	Basic	●	●
LS	Axial foot (one side) (rod side)	●	●
FA	Rod side flange	●	●
CB	Clevis bracket (pin and snap ring attached)	●	●

C Bore size (mm)

6	ø6
10	ø10
16	ø16

D Stroke (mm)

Bore size	Stroke *2	Available Stroke	Custom Stroke
ø6	5 to 100	105	In 1 mm increments
ø10	5 to 200	210	
ø16	5 to 260	270	

E Head side port direction

Blank	Vertical
O	Axial direction

F Switch model No.

Lead wire Straight type	Lead wire L-shaped	Contact	Voltage	Indicator	Lead wire
AC	DC				
T0H*	T0V*	Reed	●	1-color display	2-wire
T5H*	T5V*		●	No indicator lamp	
T2H*	T2V*		●	1-color display	
T3H*	T3V*		●	1-color display	2-wire
T2HR3	T2VR3	Proximity	●	Bending resistant lead wire	3-wire
T2WH*	T2WV*		●	2-color display	2-wire
T3WH*	T3WV*		●	2-color display	3-wire

* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

G Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

H Accessory

Bore size (ø)	6	10	16
I	Rod eye	●	●
Y	Rod clevis (pin and snap ring attached)	●	●
B1	Eye bracket	●	●
B2	Clevis bracket	●	●

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Booster
ABP2	Air
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	



Small bore size cylinder
Double acting/single rod/Rubber scraper

CMK2-G-FP1-HP1 Series

● Bore size: Ø20/Ø25/Ø32/Ø40

JISCode



Specifications

Descriptions		CMK2-G-FP1-HP1			
LCG	Bore size mm	Ø20	Ø25	Ø32	Ø40
STM	Actuation			Double acting	
STG	Working fluid			Compressed air	
STR2	Max. working pressure MPa		1.0		
SCPD3	Min. working pressure MPa		0.15		
CMK2	Proof pressure MPa		1.6		
SCM	Ambient temperature °C		-10 to 60 (no freezing)		
SCG	Port size		Rc1/8		
SSD2	Stroke tolerance mm		+2.0 ₀ (up to 200), +2.4 ₀ (More than 200)		
SMG	Working piston speed mm/s		50 to 500		
LCR	Cushion		With rubber cushion		
STG	Lubrication		Not required		
STS	Allowable absorbed energy J	0.166	0.308	0.424	0.639
STL					

Stroke				
	Bore size(mm)	Standard Stroke (mm)	Max. strikeStroke (mm)	Min. Stroke (mm)
LSH-A	Ø20			
LSH-G	Ø25	25/50/75/100/150/200/		
LSH-F	Ø32	250/300	750	5
LSHM-A	Ø40			
LSHM-G				
LSHM-F				

*1: The custom Stroke is available in 1 mm increments.

*2: One side foot (LS) has the max. Stroke of 50 mm.

	Bore size (mm)	Ø20	Ø25	Ø32	Ø40 *1
SCPD3	Mounting bracket *2				
CMK2	Basic (00) *4	M1-00-20	M1-00-30	M1-00-30	M1-00-30 (for head side)
SCM	Axial foot (LB/LS) *3	M1-LB-20	M1-LB-30	M1-LB-30	M1-LB-30(For head side) CMK2-G2-40-LS (LS, LB rod side)
SSD2	Flange (FA/FB)	M1-FA-20	M1-FA-30	M1-FA-30	CMK2-G2-40-FA(FA) M1-FA-30(FB)
MSD	Trunnion (TA/TB)	M1-TA-20	M1-TA-30	M1-TA-30	CMK2-G2-40-TA(TA) M1-TA-40(TB)
MSDG-L	Eye bracket (CA)	M1-CA-20-FP1	M1-CA-30-FP1	M1-CA-30-FP1	M1-CA-30-FP1
SMG	Clevis bracket (CB)	M1-CB-20-FP1	M1-CB-30-FP1	M1-CB-30-FP1	M1-CB-30-FP1
STG					
STM					
LCR					
LCG					

*1: The rod cover nut, LS bracket (LB rod side), FA bracket and TA bracket for Ø40 bore size are not the standard type.

*2: Mounting nuts and toothed washers are included with the axial foot and flange types. The trunnion type includes mounting nuts. However, toothed washers are not included with Ø40, 00, LB (rod side), LS and FA.

*3: For the axial foot (both sides), two sets of the "M1-LB-*1" shown in table above are required. For Ø40, the brackets used on the rod side and head side are different. Refer to the table above for details.

*4: Mounting nut, toothed washer only. Although 1 set is included with the basic product (00) (only mounting nuts are included with the Ø40), use them when needed.

	SCPD3	CMK2	SCM	SCG	SSD2	STG
Long service life cylinder	SCPD3 CMK2 SCM SSD2 MDC2 MSD MSDG-L SMG	CMK2-G-FP1-HP1 Series				
Environment-resistant cylinder	LSH-A LSH-G LSH-F LSHL-A LSHL-G LSHL-F					
Linear Slide Hand	LST LSTM					
Low-profile long stroke hand	ABP2					
Air Booster						
Compatible with rechargeable batteries						
Supports food mfg. processes						

Refer to the CMK2-G-HP1 Series on page 55 for dimensions.

How to order

Without switch (built-in magnet for switch)

CMK2-G - 00 - 20 - 100 - FP1 Y - HP1

With switch (built-in magnet for switch)

CMK2-G - 00 - 20 - 100 - T0H - R - V FP1 Y - HP1**A** Mounting
*1**B** Bore size**C** Port thread**D** Stroke**E** Switch model No.**F** Switch quantity
*5**G** Option**H** Accessory
*3

Code	Description
A Mounting	
00	Basic
LB	Axial foot (both sides)
LS	Axial foot (one side)
FA	Rod side flange
FB	Head side flange
CA	Eye bracket
CC	Eye bracket integrated
CC1	Eye bracket, bush pressfit
CB	Clevis Bracket (pin and split washer pin included)
TA	Rod side trunnion
TB	Head side trunnion

B Bore size (mm)

20	ø20	*6
25	ø25	*6
32	ø32	
40	ø40	

C Port thread

Blank	Rc thread
NN	NPT thread (made to order)
GN	G thread (made-to-order product)

D Stroke (mm)

Stroke *2	Custom Stroke
5 to 750	In 1 mm increments

E Switch model No.

Lead wire Straight type	Lead wire L-shaped type	Contact	Voltage AC DC	Display	Lead Line
T0H*	T0V*	Reed	● ●	1-color display	2-wire
T5H*	T5V*		● ●	No indicator lamp	
T8H*	T8V*		● ●	1-color display	
T1H*	T1V*		●	1-color display	2-wire
T2H*	T2V*		●	1-color display	3-wire
T3H*	T3V*		●	1-color display	2-wire
T2HR3	T2VR3		●	Bending resistant lead wire	2-wire
T3PH*	T3PV*		●	1-color display (made to order)	3-wire
T2WH*	T2WV*		●		2-wire
T2YH*	T2YV*		●	2-color display	3-wire
T3WH*	T3WV*		●		2-wire
T3YH*	T3YV*		●		3-wire
T2JH*	T2JV*		●	1-color display off-delay	2-wire

*** Lead wire length**

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

F Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

G Option

M	Piston rod material (stainless steel) *6
V	Boss cutoff

H Accessory

I	Rod eye
Y	Rod clevis (pin and split washer pin attached)
B2	Clevis bracket (pin and snap ring included)


SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

[Model No. example]

CMK2-G-00-20-100-T0H-R-VFP1Y-HP1

Model: Small bore cylinder Food-grade grease specifications

- A** Mounting :Basic
- B** Bore size :ø20 mm
- C** Port thread :Rc thread
- D** Stroke :100 mm
- E** Switch model No. :Reed T0H switch, lead wire 1m
- F** Switch quantity :1 on rod side
- G** Option :Boss cutoff
- H** Accessory :Rod clevis

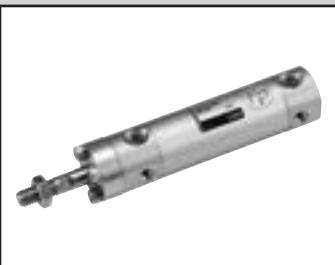

Round shaped cylinder
Double acting/single rod/rubber scraper

SCM-G-FP1-HP1 Series

● Bore size: ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100

JISCode



Specifications

Item	SCM-G-FP1-HP1														
LCG	Bore size mm	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100						
STM	Actuation	Double acting													
STG	Working fluid	Compressed air													
STR2	Max. working pressure MPa	1.0													
SCPD3	Min. working pressure MPa	0.1	0.15	0.1											
CMK2	Proof pressure MPa	1.6													
MSD	Ambient temperature °C	-10 to 60 (no freezing)													
MSDG-L	Port size	Rc1/8				Rc1/4	Rc3/8	Rc1/2							
SMG	With rubber cushion	M5	Rc1/8		Rc1/4	Rc3/8	Rc1/2								
LCR	With air cushion	+1.4 0	(up to 1000)	+1.40 (up to 1500)		+2.3 0	+2.7 0	(1001 to 1500)							
STG	Stroke tolerance mm	+1.4 0	(up to 1000)	+1.40 (up to 1500)		+1.4 0	+1.8 0	(1001 to 1500)							
STS	Working piston speed mm/s	30 to 1000 (Operate within the allowable absorbed energy.)													
STL	Cushion	Either rubber cushion or air cushion can be selected.													
LSH-A	Effective air cushion length mm	8.1	8.1	8.6	8.6	13.4	13.4	15.4	15.4						
LSH-G	Lubrication	Not required													
LSH-F	Allowable absorbed energy J	With rubber cushion	0.1	0.2	0.5	0.9	1.6	1.6	3.3	5.8					
LSHL-A	With air cushion	0.8	1.2	2.5	3.7	8.0	14.4	25.4	45.6						
LSHL-G	Without cushion	-	-	-	-	0.057	0.057	0.112	0.153						

Stroke

Bore size (mm)	Standard Stroke (mm)	Max. Stroke(mm)	Min. Stroke (mm)
ø20			
ø25			
ø32			
ø40	25, 50, 75, 100, 125, 150, 200, 250, 300	1000	
ø50			10
ø63			
ø80			
ø100		1500	

*1: The custom Stroke is available in 1 mm increments.

How to order mounting brackets

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket								
SCPD3	SCM-LB-20-HP1	SCM-LB-25-HP1	SCM-LB-32-HP1	SCM-LB-40-HP1	SCM-LB-50-HP1	SCM-LB-63-HP1	SCM-LB-80-HP1	SCM-LB-100-HP1
CMK2	SCM-FA-20-HP1	SCM-FA-25-HP1	SCM-FA-32-HP1	SCM-FA-40-HP1	SCM-FA-50-HP1	SCM-FA-63-HP1	SCM-FA-80-HP1	SCM-FA-100-HP1
SCM	SCM-CA-20	SCM-CA-25	SCM-CA-32	SCM-CA-40	SCM-CA-50	SCM-CA-63	-	-
SSD2	SCM-TA-20-FP1	SCM-TA-25-FP1	SCM-TA-32-FP1	SCM-TA-40-FP1	SCM-TA-50-FP1	SCM-TA-63-FP1	-	-
MSD								
MSDG-L								
SMG							SCM-CB-80-FP1	SCM-CB-100-FP1
STG								
STM								

*1: All mounting brackets are supplied with mounting bolts.

*2: The foot mounting bracket is provided as 2 pcs./set.

Linear Slide Hand

Low-profile long stroke hand

Air Booster

Compatible with rechargeable batteries

Supports food mfg. processes

Long service life cylinder

Environment-resistant cylinder

Refer to the SCM-G-HP1 Series on pages 59 to 61 for dimensions.

SCM-G-FP1-HP1 Series

How to order

How to order

Without switch(built-in magnet for switch)

SCM-G-LB-40-B-100-MFP1I-HP1

With switch(built-in magnet for switch)

SCM-G-LB-40-B-100-T2H-D-MFP1I-HP1

A Mounting
*1

B Bore size

C Port thread

D Cushion

E Stroke

F Switch model No.

*3

*4

H Switch mounting

G Switch quantity

I Option
*6

J Accessory
*7

⚠ Precautions for model No. selection

*1: Mounting bracket will be shipped with the product. However, mounting types: LB and FA are assembled at shipment. In addition, when the mounting type is 00, it cannot be installed on the rod side.

*2: Refer to **SCM-G-HP1 Series on page 56** for the min. stroke length with switch.

*3: Switches other than **F** Switch model No. are also available. (Made to order) For details, refer to "Pneumatic Cylinders I (No. CB-029S)".

*4: T8H/V switches cannot be mounted when the bore size is Ø20 to Ø40 and switch mounting is the rail type.

*5: Refer to "Pneumatic Cylinders I (Catalog I)" (CB-029SA) for made-to-order specifications of rod end form.

*6: "Q" (switch rail attached at shipment) is not available for "Z" switch mounting.

*7: "I" and "Y" cannot be selected together.

*8: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

SCM-G-LB-40B-100-T2H-D-MFP1I-HP1

Model:Round shaped cylinder Food-grade grease specifications

- A Mounting** : Axial foot
- B Bore size** : Ø40 mm
- C Port thread** : Rc thread
- D Cushion** : With two-sided air cushion
- E Stroke** : 100 mm
- F Switch model No.** : Proximity T2H switch, lead wire 1 m
- G Switch quantity** : 2 pcs. included
- H Switch mounting** : Rail
- I Option** : Piston rod material (stainless steel)
- J Accessory** : Rod eye

Code	Description							
A Mounting								
Bore size (Ø)		20	25	32	40	50	63	80
00	Basic	●	●	●	●	●	●	●
LB	Axial foot	●	●	●	●	●	●	●
FA	Rod side flange	●	●	●	●	●	●	●
FB	Head side flange	●	●	●	●	●	●	●
CA	Eye bracket	●	●	●	●	●	●	●
CB	Clevis bracket (pin and snap ring attached)							●
TA	Rod side trunnion	●	●	●	●	●	●	●
TB	Head side trunnion	●	●	●	●	●	●	●
B Bore size (mm)								
20	Ø20							
25	Ø25							
32	Ø32							
40	Ø40							
50	Ø50							
63	Ø63							
80	Ø80							
100	Ø100							
C Port thread								
Blank	Rc thread							
N	NPT thread (made to order) With air cushion: Ø32 and over							
G	G thread (made to order) With air cushion: Ø32 and over							
D Cushion								
B	With two-sided air cushion							
R	Rod side air cushioned							
H	Head side air cushioned							
D	With two-sided rubber cushion							
E Stroke (mm)								
Bore size		Stroke *2		Custom Stroke				
Ø20 to Ø32		10 to 1000		In 1 mm increments				
Ø40 to Ø100		10 to 1500						
F Switch model No.								
Lead wire Straight type	Lead wire L-shaped type	Voltage AC DC	Display	Lead wire				
TOH*	T0V*	● ●	1-color display	2-wire				
T5H*	T5V*	● ●	No indicator lamp	3-wire				
T8H*	T8V*	● ●	1-color display					
T1H*	T1V*	●	1-color display	2-wire				
T2H*	T2V*	●	1-color display	3-wire				
T3H*	T3V*	●	1-color display					
T2HR3	T2VR3	●	Bending resistant lead wire	2-wire				
T3PH*	T3PV*	●	1-color display (made to order)	3-wire				
T2WH*	T2WV*	●	1-color display	2-wire				
T2YH*	T2YV*	●	1-color display	3-wire				
T3WH*	T3WV*	●	2-color display	2-wire				
T3YH*	T3YV*	●	2-color display	3-wire				
T2YD*	-	●	AC magnetic field	2-wire				
T2YDT*	-	●	1-color display off-delay	2-wire				
G Switch quantity								
R	1 on rod side							
H	1 on head side							
D	2							
T	3							
G	4 (when there are more than 4 switches, indicate switch quantity.)							
H Switch mounting								
Blank	Rail method							
Z	Band method							
I Option								
Q	Switch rail attached at shipment							
M	Piston rod material (stainless steel)							
J Accessory								
Bore size (Ø)		20	25	32	40	50	63	80
I	Rod eye	●	●	●	●	●	●	●
Y	Rod clevis (pin and snap ring attached)	●	●	●	●	●	●	●
B1	Eye bracket							●
B2	Clevis bracket	●	●	●	●	●	●	●

SCPD3	Supports food processing
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	Low-profile long
LSH-F	Air Booster
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	
LSTM	
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STS	
LCR	
LCG	
STR2	
LSH-A	Compatible with rechargeable batteries
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	

Tie rod cylinder Double acting/rubber scraper

SCG-G-FP1-HP1 Series

● Bore size: ø32/ø40/ø50/ø63/ø80/ø100

JISCode 

Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG
LCR

Environment-resistant cylinder

LCG
STM
STG
STR2
SCPD3
CMK2
SCM
SCG

Linear Slide Hand

Rc1/8
Rc1/4
Rc3/8
Rc1/2
With rubber cushion
With air cushion
50 to 1000 (Use the product within the allowable absorbed energy.)
Either air cushion or rubber cushion can be selected
8.6
13.4
15.4
15.4

Low-profile long stroke hand

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Compatible with rechargeable batteries

Bore size (mm)
Standard Stroke (mm)
Max. Stroke (mm)
Available Stroke (mm)
Min. Stroke(mm)

Supports food mfg. processes

Specifications

Descriptions		SCG-G-FP1-HP1				
LCG	Bore size mm	ø32	ø40	ø50	ø63	ø80
STM	Actuation			Double acting		
STG	Working fluid			Compressed air		
STR2	Max. working pressure MPa			1.0		
SCPD3	Min. working pressure MPa			0.15		
CMK2	Proof pressure MPa			1.6		
SCM	Ambient temperature °C			-10 to 60 (no freezing)		
SCG	Port size	Rc1/8	Rc1/4	Rc3/8	Rc1/2	
SSD2	Stroke tolerance mm			+1.4 ₀ (up to 1000), +1.8 ₀ (1001 to 1500)		
SMG	With rubber cushion			+1.0 ₀ (up to 360), +1.4 ₀ (361 to 1000), +1.8 ₀ (1001 to 1500)		
LCR	With air cushion					
STG	Working piston speed mm/s			50 to 1000 (Use the product within the allowable absorbed energy.)		
STS	Cushion			Either air cushion or rubber cushion can be selected		
STL	Effective air cushion length mm	8.6	8.6	13.4	13.4	15.4
LSH-A	Lubrication			Not required		
LSH-G	Allowable absorbed energy J	With rubber cushion	0.5	0.9	1.6	1.6
LSH-F	With air cushion	2.5	3.7	8.0	14.4	25.4
LSHL-A						45.6
LSHL-G						
LSHL-F						
Stroke						
LSHM-A	Bore size (mm)	ø32	25/50/75/100 150/200/250 300/350/400 450/500	600	700	1
LSHM-G		ø40			800	
LSHM-F		ø50			1200	
LST		ø63			1200	
LSTM		ø80			700	
ABP2		ø100			1400	
					800	
					1500	

*1: The custom stroke length is available in 1 mm increments.

*2: If the max. stroke length is exceeded, product specifications may not be met, depending on operating conditions. Contact CKD in this case.

How to order mounting brackets

Bore size (mm)	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket						
Foot (LB)	SCG-LB-32	SCG-LB-40	SCG-LB-50	SCG-LB-63	SCG-LB-80	SCG-LB-100
Flange (FA) (FB)	SCG-FA-32	SCG-FA-40	SCG-FA-50	SCG-FA-63	SCG-FA-80	SCG-FA-100
Eye bracket (CA)	SCG-CA-32-FP1	SCG-CA-40-FP1	SCG-CA-50-FP1	SCG-CA-63-FP1	SCG-CA-80-FP1	SCG-CA-100-FP1
Clevis bracket (CB)	SCG-CB-32-FP1	SCG-CB-40-FP1	SCG-CB-50-FP1	SCG-CB-63-FP1	SCG-CB-80-FP1	SCG-CB-100-FP1

*1: The foot mounting bracket (LB) is provided as 2 pcs./set.

*2: All mounting brackets have mounting bolts attached.

Refer to the SCG-G-HP1 Series on page 65 for dimensions.

SCG-G-FP1-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)


SCG-G - LB - 40 - B - 100 - M FP1 I - HP1

With switch (built-in magnet for switch)

SCG-G - LB - 40 - B - 100 - T2H - R - M FP1 I - HP1

Model No.


A Mounting
*1

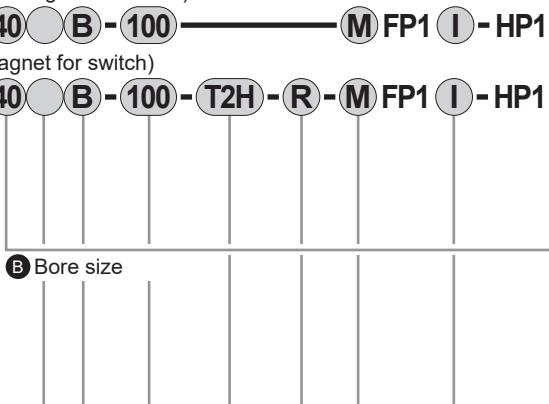

B Bore size



C Port thread



D Cushion



E Stroke

F Switch model No.

G Switch quantity
*3

H Option

I Accessory
*4

Code	Description
------	-------------

A Mounting

00	Basic
LB	Axial foot
FA	Rod side flange
FB	Head side flange
CA	Eye bracket
CB	Clevis bracket (pin and split pin attached)
TA	Rod side trunnion
TB	Head side trunnion
TC	Intermediate trunnion

B Bore size (mm)

32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

C Port thread

Blank	Rc thread
N	NPT thread (made to order)
G	G thread (made-to-order product)

D Cushion

B	Two-sided air cushion (basic)
D	Two-sided rubber cushion

Note: The rubber cushioned type has a longer total length than the air cushioned type.

E Stroke (mm)

Bore size	Stroke *2	Available Stroke	Custom Stroke
ø32	1 to 600	700	In 1 mm increments
ø40		800	
ø50		1200	
ø63			
ø80		1 to 700	1400
ø100		1 to 800	1500

F Switch model No.

Lead wire	Lead wire	Contact	Voltage	Display	Lead wire
Straight type	L-shaped type	Reed	AC DC		
TOH*	T0V*	●	●	1-color display	2-wire
T5H*	T5V*	●	●	No indicator lamp	
T8H*	T8V*	●	●	1-color display	
T1H*	T1V*	●		1-color display	2-wire
T2H*	T2V*	●		1-color display	3-wire
T3H*	T3V*	●		1-color display	2-wire
T2HR3	T2VR3	●		Bending resistant lead wire	2-wire
T3PH*	T3PV*	●		1-color display (made to order)	3-wire
T2WH*	T2WV*	●		2-color display	2-wire
T2YH*	T2YV*	●		2-color display	3-wire
T3WH*	T3WV*	●		2-color display	2-wire
T3YH*	T3YV*	●		2-color display	2-wire
T2YD*	-	●		AC magnetic field	2-wire
T2YDT*	-	●		1-color display off-delay	2-wire
T2JH*	T2JV*	●			

* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

G Switch quantity

R	1 on rod side
H	1 on head side
D	2
T	3

H Option

M	Piston rod material (stainless steel)
---	---------------------------------------

I Accessory

I	Rod eye
Y	Rod clevis (pin and split pin attached)
B1	Eye bracket
B2	Clevis bracket (pin and split pin attached)
B3	Eye bracket
B4	Trunnion No. 2 bracket (2 pcs./set)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	Environment-resistant cylinder
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Linear Slide Hand
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Low-profile long stroke hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Air Booster
LSTM	
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

Precautions for model No. selection

*1: Mounting bracket will be shipped with the product.
(Trunnion types are assembled at shipment.)

*2: Refer to S C G-G-H P1 Series on pages 62 and 63 for the min. stroke with switch.

*3: MountingWhen selecting TA or TB with , the switch quantity is limited to "H" (1 on head side) for TAR (1 on rod side) for TB.

*4: "I" and "Y" cannot be selected together.

[Example of model No.]

SCG-G-LB-40B-100-T2H-D-MFP1I-HP1

Model:Tie rod cylinder Food-grade grease specifications

- A** Mounting : Axial foot
- B** Bore size : ø40 mm
- C** Port thread : Rc thread
- D** Cushion : With two-sided air cushion
- E** Stroke : 100mm
- F** Switch model No. : Proximity T2H switch, lead wire 1 m
- G** Switch quantity : 2 pcs. included
- H** Option :Piston rod material(Stainless steel)
- I** Accessories : Rod eye (included)



Compact cylinder
Double acting/single rod/rubber scraper

SSD2-G-FP1-HP1 Series

● Bore size: ø12/ø16/ø20/ø25/ø32/ø40/ø50/ø63/ø80/ø100

JIS symbol



Specifications

	SSD2-G-FP1-HP1 SSD2-GL-FP1-HP1 (with switch)										
LCR		ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
LCG											
STM	Bore size mm										
STG	Actuation										
STR2	Working fluid										
SCPD3	Max. working pressure MPa										
CMK2	Min. working pressure MPa	0.1				0.2				0.15	
SCM	Proof pressure MPa						1.6				
SCG	Ambient temperature °C						-10 to 60 (no freezing)				
SSD2	Port size		M5		Rc1/8 *1		Rc1/4		Rc3/8		
SMG	Stroke tolerance mm				+1.0	0					
LCR	Working piston speed mm/s			50 to 500					50 to 300		
STG	Cushion				No						
STS	Lubrication				Not required						
STL	Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56
LSH-A	LSH-G	LSH-F									
LSH-L	LSHL-A	LSHL-G	LSHL-F								
LSHM-A	Bore size (mm)	Standard Stroke (mm)					Max. Stroke (mm)	Min. Stroke (mm)			
LSHM-G	ø12	5/10/15/20/25/30					30				
LSHM-F	ø16										
LST	ø20	5/10/15/20/25/30/35/40/45/50					50				
LSTM	ø25										
ABP2	ø32	5/10/15/20/25/30/35/40/45/50/75/100									
Air Booster	ø40										
ABP2	ø50										
SCPD3	ø63	10/15/20/25/30/35/40/45/50/75/100									
CMK2	ø80										
SCM	ø100										
SSD2											

*1: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

Stroke

	Bore size (mm)	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)
LSHM-A	ø12	5/10/15/20/25/30	30	
LSHM-G	ø16			
LSHM-F	ø20	5/10/15/20/25/30/35/40/45/50	50	
LST	ø25			
LSTM	ø32	5/10/15/20/25/30/35/40/45/50/75/100		
ABP2	ø40			
Air Booster	ø50			
ABP2	ø63	10/15/20/25/30/35/40/45/50/75/100		
SCPD3	ø80			
CMK2	ø100			

1

*1: When using the type with switch, refer to the table of the min. Stroke with switch.

MSD

MSDG-L

SMG

STG

STM

LCR

LCG

STR2

LSH-A

LSH-G

LSH-F

LSHL-A

LSHL-G

LSHL-F

SCPD3

CMK2

SCM

SCG

SSD2

STG

Refer to the SSD2-G-HP1 Series on page 69 for dimensions.

SSD2-G-FP1-HP1 Series

How to order

How to order

Without switch (without magnet for switch)

SSD2-G - 32 - 5 - N FP1 - LB - I - HP1

With switch (built-in magnet for switch)

SSD2-GL - 32 - 10 - T0H - R - N FP1 - LB - I - HP1

A Model No.

B Bore size

C Port thread

D Stroke

E Switch model No.

*1
*2
*3
*6
*7

F Switch quantity

G Option

H Mounting bracket *4

*9

⚠ Precautions for model No. selection

1: T2YD switch cannot be installed on ø12, ø16.

2: ø1T8 switch cannot be installed on 2 to ø32.

*3: The F type switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.

*4: The mounting bracket is attached at shipment.

*5: "I" and "Y" cannot be selected together.

*6: The F type switch with L type lead wire on ø20 models cannot be selected on strokes 15 mm or under.

*7: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

*8: F type switch cannot be selected.

*9: The ø12 to ø32 structure does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Assembly before shipment is available as made to order.

[Example of model No.]

SSD2-GL-20-10-T0H-R-NFP1-LB-I-HP1

Model: Compact cylinder Food-grade grease specifications

B Bore size : ø20 mm

C Port thread : M5

D Stroke : 10 mm

E Switch model No. : Reed switch T0H*
Lead wire length 1 m

F Switch quantity : 1 on rod side

G Option : Rod end male thread

H Mounting bracket : Axial foot

I Accessory : Rod eye

Code	Description
A Model No.	
SSD2-G	Double acting/single rod/rubber scraper
SSD2-GL	Double acting/single rod/rubber scraper/with switch

B Bore size (mm)

12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

C Port thread

Blank	M5 (ø12 to ø25) Rc thread (ø32 to ø100)
NN	NPT thread (ø32 and over) (made to order)
GN	G thread (ø32 and over) (made-to-order product)

D Stroke (mm)

Refer to the Stroke table on the following page.

E Switch model No.

Lead wire Straight type	Lead wire L-shaped	Contact	Voltage AC DC	Display	Lead wire	Bore size							
						12	16	20	25	32	40	50	63
F2S*		●		2-wire			●	●					
F3S*		●		3-wire				●	●				
F2H*	F2V*	●		2-wire				●	●				
F3H*	F3V*	●		3-wire				●	●				
F3PH*	F3PV*	●		1-color display (PNP output) (made to order)	3-wire			●	●				
F2YH*	F2YV*	●		2-wire				●	●				
F3YH*	F3YV*	●		3-wire				●	●				
T0H*	T0V*	●	●	1-color display			●	●	●	●	●	●	●
T5H*	T5V*	●	●	No indicator lamp	2-wire		●	●	●	●	●	●	●
T8H*	T8V*	●	●	1-color display			●	●	●	●	●	●	●
T1H*	T1V*	●		1-color display	2-wire			●	●	●	●	●	●
T2H*	T2V*	●		3-wire			●	●	●	●	●	●	●
T3H*	T3V*	●											
T2HR3	T2VR3	●		1-color display	2-wire			●	●	●	●	●	●
T3PH*	T3PV*	●		Bending resistant lead wire	3-wire			●	●	●	●	●	●
T2WH*	T2WV*	●			2-wire			●	●	●	●	●	●
T2YH*	T2YV*	●			3-wire			●	●	●	●	●	●
T3WH*	T3WV*	●											
T3YH*	T3YV*	●		2-color display	2-wire			●	●	●	●	●	●
T2YD*	-	●		AC magnetic field	2-wire			●	●	●	●	●	●
T2YDT*	-	●											
T2JH*	T2JV*	●		1-color display off-delay	2-wire			●	●	●	●	●	●

* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

F Switch quantity

R	1 on rod side
H	1 on head side
D	2

G Option

Blank	Rod end female thread
N	Rod end male thread

H Mounting bracket

Blank	Without mounting bracket
LB	Axial foot (made to order)
CB	Clevis bracket (pin and snap ring attached)
FA	Rod side flange (made to order)
FB	Head side flange

I Accessory (available when rod end male thread "N" is selected)

I	Rod eye
Y	Rod clevis (pin and snap ring attached)

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
MSG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STS	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

*5

SSD2-G-FP1-HP1 Series

[Stroke table]

Long service life cylinder	SCPD3 CMK2 SCM	Stroke (mm)	Applicable bore size																		
			12	16	20	25	32	40	50	63	80	100									
Standard Stroke	SSD2	5	●	●	●	●	●	●													
	MDC2	10	●	●	●	●	●	●	●	●	●	●									
	MSD	15	●	●	●	●	●	●	●	●	●	●									
	MSDG-L	20	●	●	●	●	●	●	●	●	●	●									
	SMG	25	●	●	●	●	●	●	●	●	●	●									
	LCR	30	●	●	●	●	●	●	●	●	●	●									
	LCG	35			●	●	●	●	●	●	●	●									
	STM	40			●	●	●	●	●	●	●	●									
	STG	45			●	●	●	●	●	●	●	●									
	STR2	50			●	●	●	●	●	●	●	●									
	SCPD3 CMK2 SCM	75				●	●	●	●	●	●	●									
	SCG	100				●	●	●	●	●	●	●									
Environment-resistant cylinder	Min. Stroke (mm) *1	1																			
	SSD2	30	50	100																	
	SMG	Custom Stroke *2 In 1 mm increments																			
	LCR STG STS STL																				

1: Less than 5 mm with 1-color display switch and less than 10 mm with the 2-color display, off-delay, AC magnetic field proof, T1 or T8* switch are not available. Refer to SSD2-G-HP1 Series on page 66 for the min. stroke length with switch.

*2: The total length when using a custom Stroke is the same as that when using the next longer standard Stroke.

How to order mounting brackets

Bore size (mm) Mounting bracket	ø12	ø16	ø20	ø25	ø32	ø40	ø50
Foot (LB)						SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)						SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12-FP1	SSD2-CB-16-FP1	SSD2-CB-20-FP1	SSD2-CB-25-FP1	SSD2-CB-32-FP1	SSD2-CB-40-FP1	SSD2-CB-50-FP1
Bore size (mm) Mounting bracket	ø63	ø80	ø100				
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA/FB)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				
Clevis bracket (CB)	SSD2-CB-63-FP1	SSD2-CB-80-FP1	SSD2-CB-100-FP1				

**1: The foot mounting bracket is provided as 2 pcs./set.

**2: The ø12 to ø32 structure does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Contact CKD for details.

Compatible with rechargeable batteries

LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STG

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food safety processes
CMK2	
SCM	
SCG	
SSD2	
STG	


NSF-H1

Guided cylinder Double acting/rubber scraper

STG-^M_BG-FP1-HP1 Series

● Bore size: $\varnothing 12/\varnothing 16/\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$

JISCode



Long service life cylinder

SCPD3
CMK2
SCM
SSD2
MDC2
MSD
MSDG-L
SMG

Specifications

Item	STG- ^M _B G-HP1																
LCG	$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$							
STM	Actuation																
STG	Double acting																
STR2	Working fluid																
SCPD3	Compressed air																
CMK2	Max. working pressure MPa																
SCM	1.0																
SCG	Min. working pressure MPa																
SSD2	0.25																
SMG	Proof pressure MPa																
LCR	1.6																
STG	Ambient temperature °C																
STS	-10 to 60 (no freezing)																
STL	Port size																
LSH-A	$M5$	$Rc1/8$			$Rc1/4$			$Rc3/8$									
LSH-G	Stroke tolerance mm																
LSH-F	$+2.0$																
LSHL-A	0																
LSH-L	Working piston speed mm/s																
LSH-M	50 to 500																
LSH-N	50 to 300																
LSH-O	Cushion																
LSH-P	With rubber cushion																
LSH-Q	Lubrication																
LSH-R	Not required																
LSH-S	Allowable absorbed energy J																
LSH-T	0.056	0.088	0.157	0.157	0.401	0.627	0.980	1.560	2.510	3.920							

Stroke

Bore size	Standard Stroke (mm)	Max. Stroke (mm)	Min. Stroke (mm)	Min. stroke with switch(mm)
$\varnothing 12$	10/20/30/40/50/75/100	250		
$\varnothing 16$	125/150/175/200/250			
$\varnothing 20$	20/30/40/50/75/100/125			
$\varnothing 25$	150/175/200/250/300/350/400			
$\varnothing 32$				
$\varnothing 40$	25/50/75/100	400	5	5(10) *2
$\varnothing 50$	125/150/175			
$\varnothing 63$	200/250/300			
$\varnothing 80$	350/400			
$\varnothing 100$				

*1: The custom Stroke is available in 5 mm increments. However, the total length is the same as that of the next longer standard Stroke.

*2: For types with one or two switches. The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

Linear Slide Hand

LSH-A
LSH-G
LSH-F
LSHL-A
LSHM-A
LSHM-G
LSHM-F
LST
LSTM
ABP2
SCPD3

Compatible with rechargeable batteries

CMK2
SCM
SSD2
MSD
MSDG-L
SMG
STG
STM
LCR
LCG
STR2
LSH-A
LSH-G
LSH-F
LSHL-A
LSHL-G
LSHL-F

Supports food mfg. processes

SCPD3
CMK2
SCM
SCG
SSD2
STGRefer to STG-^M_BG-HP1 Series on pages 98 to 101 for dimensions.

STG-^M_BG-FP1-HP1 Series

How to order

How to order

Without switch (built-in magnet for switch)

STG-**M****G**-**32**-**25**-FP1-HP1

With switch (built-in magnet for switch)

STG-**M****G**-**32**-**25**-**T2H**-**R**-FP1-HP1

Model No.

A Bearing

B Model No.

C Bore size

F Switch model No.
*1 *2 *3

E Stroke

D Port thread

G Switch quantity

Code	Description									
A Bearing	M Metal bush bearing B Ball bearing									
B Model No.	G Rubber scraper									
C Bore size (mm)										
12	ø12									
16	ø16									
20	ø20									
25	ø25									
32	ø32									
40	ø40									
50	ø50									
63	ø63									
80	ø80									
100	ø100									
D Port thread										
Blank	M5 (ø12 to ø16) Rc thread (ø20 to ø100)									
NN	NPT thread (ø20 and over) (made to order)									
GN	G thread (ø20 and over) (made-to-order product)									
E Stroke (mm)										
Refer to the Stroke table below										
F Switch model No.										
Lead wire Straight type	Lead wire L-shaped type	Display								
T0H*	T0V*	1-color display								
T5H*	T5V*	No indicator lamp								
T8H*	T8V*	1-color display								
T1H*	T1V*	1-color display								
T2H*	T2V*	2-wire								
T3H*	T3V*	3-wire								
T2HR3	T2VR3	2-wire								
T3PH*	T3PV*	3-wire								
T2WH*	T2WV*	2-wire								
T2YH*	T2YV*	2-wire								
T3WH*	T3WV*	3-wire								
T3YH*	T3YV*	2-wire								
T2YD*	-	2-wire								
T2YDT*	-	2-wire								
T2JH*	T2JV*	1-color display off-delay								
* Lead wire length										
Blank	1 m (standard)									
3	3 m (option)									
5	5 m (option)									
G Switch quantity										
R	1 on rod side									
H	1 on head side									
D	2									
T	3									
E Stroke										
Stroke (mm)	Applicable bore size									
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
10	●	●								
20	●	●	●	●						
25					●	●	●	●	●	●
30	●	●	●	●						
40	●	●	●	●	●					
50	●	●	●	●	●	●	●	●	●	●
75	●	●	●	●	●	●	●	●	●	●
100	●	●	●	●	●	●	●	●	●	●
125	●	●	●	●	●	●	●	●	●	●
150	●	●	●	●	●	●	●	●	●	●
175	●	●	●	●	●	●	●	●	●	●
200	●	●	●	●	●	●	●	●	●	●
250	●	●	●	●	●	●	●	●	●	●
300		●	●	●	●	●	●	●	●	●
350		●	●	●	●	●	●	●	●	●
400		●	●	●	●	●	●	●	●	●
Min. Stroke	*2		5 (10)							
Custom Stroke	*1		In 5 mm increments							

*1: The total dimensions are the same as the longer standard Stroke.

*2: The value in () is the min. Stroke for switches of the 2-color display and AC magnetic field proof.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Booster
ABP2	Air
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food processing
CMK2	
SCM	
SCG	
SSD2	
STG	

MEMO

	Long service life cylinder
	SCPD3
	CMK2
	SCM
	SSD2
	MDC2
	MSD
	MSDG-L
	SMG
	LCR
	LCG
	STM
	STG
	STR2
	SCPD3
	CMK2
	SCM
	SCG
	SSD2
	SMG
	LCR
	STG
	STS
	STL
Environment-resistant cylinder	LSH-A
	LSH-G
	LSH-F
	LSHL-A
	LSHL-G
	LSHL-F
	LSHM-A
	LSHM-G
	LSHM-F
Linear Slide Hand	LST
Air Booster	LSTM
Low-profile long stroke hand	ABP2
Compatible with rechargeable batteries	SCPD3
	CMK2
	SCM
	SSD2
	MSD
	MSDG-L
	SMG
	STG
	STM
	LCR
	LCG
	STR2
	LSH-A
	LSH-G
	LSH-F
	LSHL-A
	LSHL-G
	LSHL-F
Supports food mfg. processes	SCPD3
	CMK2
	SCM
	SCG
	SSD2
	STG

MEMO

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	
STG	
STR2	
SCPD3	Environment-resistant cylinder
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	
STS	
STL	
LSH-A	Linear Slide Hand
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	
LSHM-F	
LST	Low-profile long stroke hand
LSTM	Air Booster
ABP2	
SCPD3	Compatible with rechargeable batteries
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
SCPD3	Supports food safety processes
CMK2	
SCM	
SCG	
SSD2	
STG	



Safety Precautions

Be sure to read this section before use.

When designing and manufacturing equipment using CKD wet fine system products, the manufacturer is obligated to ensure that the safety of the mechanism, pneumatic control circuit and/or water control circuit and the system that runs the electrical controls are secured. It is important to select, use, handle and maintain CKD products appropriately to ensure their safe usage.

Observe warnings and precautions to ensure device safety.

Check that device safety is ensured, and manufacture a safe device.

⚠ WARNING

- 1** This product is designed and manufactured as a general industrial machine part. It must be handled by an operator having sufficient knowledge and experience.
- 2** Use this product in accordance with specifications.

This product must be used within its stated specifications. In addition, never modify or additionally machine this product.

This product is intended for use in general industrial machinery equipment or parts. It is not intended for use outdoors (except for products with outdoor specifications) or for use under the following conditions or environments. (Note that this product can be used when CKD is consulted prior to its usage and the customer consents to CKD product specifications. The customer should provide safety measures to avoid danger in the event of problems.)

- ① Use for applications requiring safety, including nuclear energy, railways, aircraft, marine vessels, vehicles, medical devices, devices or applications in contact with beverages or foodstuffs, amusement devices, emergency cutoff circuits, press machines, brake circuits, or safety devices or applications.
- ② Use for applications where life or assets could be significantly affected, and special safety measures are required.

- 3** Observe organization standards and regulations, etc., related to the safety of the device design and control, etc.

ISO4414, JIS B 8370(Pneumatic fluid power - General rules and safety requirements for systems and their components)

JFPS2008 (Principles for pneumatic cylinder selection and use)

Including the High Pressure Gas Safety Act, Industrial Safety and Health Act, other safety rules, organization standards and regulations, etc.

- 4** Do not handle, pipe, or remove devices before confirming safety.

- ① Inspect and service the machine and devices after confirming safety of all systems related to this product.
- ② Note that there may be hot or charged sections even after operation is stopped.
- ③ When inspecting or servicing the device, turn OFF the energy source (air supply or water supply), and turn OFF power to the facility. Discharge any compressed air from the system, and pay attention to possible water leakage and leakage of electricity.
- ④ When starting or restarting a machine or device that incorporates pneumatic components, make sure that the system safety, such as pop-out prevention measures, is secured.

- 5** Observe the warnings and cautions on the following pages to prevent accidents.

■ Precautions are ranked as "DANGER", "WARNING", and "CAUTION" in this section.

⚠ DANGER: In the case where the product operation is mishandled and/or when the urgency of a dangerous situation is high, it may lead to fatalities or serious injuries.

⚠ WARNING: A dangerous situation may occur if handling is mistaken, leading to fatal or serious injuries.

⚠ CAUTION: A dangerous situation may occur if handling is mistaken, leading to minor injuries or property damage.

Note that some items indicated with "CAUTION" may lead to serious results depending on the conditions. All items contain important information and must be observed.

Long service life cylinder	SCPD3 CMK2 SCM SSD2 MDC2 MSD MSDG-L SMG LCR LCG STM STG STR2
Environment-resistant cylinder	SCPD3 CMK2 SCM SCG SSD2 SMG LCR STG STS STL
Linear Slide Hand	LSH-A LSH-G LSH-F LSHL-A LSHL-G LSHL-F
Low-profile long stroke hand	LSHM-A LSHM-G LSHM-F
Air Booster	LST LSTM ABP2
Compatible with rechargeable batteries	SCPD3 CMK2 SCM SSD2 MSD MSDG-L SMG STG STM LCR LCG STR2 LSH-A LSH-G LSH-F LSHL-A LSHL-G LSHL-F
Supports food mfg. processes	SCPD3 CMK2 SCM SCG SSD2 STG

Warranty

1 Warranty period

The product specified herein is warranted for one and a half (1.5) years from the date of delivery to the location specified by the customer.

2 Warranty coverage

If the product specified herein fails for reasons attributable to CKD within the warranty period specified above, CKD will promptly provide a replacement for the faulty product or a part thereof or repair the faulty product at one of CKD's facilities free of charge. However, following failures are excluded from this warranty:

- 1) Failure caused by handling or use of the product under conditions and in environments not conforming to those stated in the catalog, the Specifications, or the Instruction Manual.
- 2) Failure caused by use of the product exceeding its durability (cycles, distance, time, etc.) or caused by consumable parts.
- 3) Failure not caused by the product.
- 4) Failure caused by use not intended for the product.
- 5) Failure caused by modifications/alterations or repairs not carried out by CKD.
- 6) Failure caused by reasons unforeseen at the level of technology available at the time of delivery.
- 7) Failure caused by acts of nature and disasters beyond control of CKD.

The warranty stated herein covers only the delivered product itself. Any loss or damage induced by failure of the delivered product is excluded from this warranty.

Note: For details on the durability and consumable parts, contact your nearest CKD sales office.

3 Compatibility check

The customer is responsible for confirming the compatibility of CKD products with the customer's systems, machines and equipment.

Precautions for export

1 Security Trade Control

The products in this catalog and their related technologies may require approval before export or provision. For the sake of maintaining world peace and safety, there may be cases in which approval under the Foreign Exchange and Foreign Trade Control Law is required in advance, depending on the country to where the product or related technology is being exported or provided.

The scope of products and related technologies requiring approval is listed in the Export Trade Control Order Appendix Table 1 or Foreign Exchange Order Appendix Table.

The Export Trade Control Order Appendix Table 1 and Foreign Exchange Order Appendix Table contain the following two types of information:

- List controls, which are specified for items 1 to 15
- "Catch-all controls" that do not indicate specifications by item, but restrict by application (Section 16)

Scope of products or related technologies requiring approval

List controls, which are specified for items 1 to 15

Listed in the "Export Trade Control Order Appendix Table 1" or "Foreign Exchange Order Appendix Table"

Catch-all controls restricted by application (item 16)

Listed in the "Export Trade Control Order Appendix Table 1" or "Foreign Exchange Order Appendix Table"

An application for approval is received by the Security Export Licensing Division of the Ministry of Economy, Trade and Industry or local bureaus of the Ministry of Economy, Trade and Industry.

2 Products and related technologies in this catalog

The products and related technologies in this catalog are subject to the list controls of the Foreign Exchange and Foreign Trade Control Law.

For information on the products or related technologies subject to the list controls of the Foreign Exchange and Foreign Trade Control Law, refer to the applicable product page.

If exporting or providing products or related technologies that fall under the list controls, be sure to obtain export permission under the Foreign Exchange and Foreign Trade Control Law.

In addition, when exporting or providing the products or related technologies in this catalog, ensure that they are not used for arms or weapons.

3 Contact

Contact your local CKD Sales Office for information on the Security Trade Control of products and related technologies in this catalog.

SCPD3	Long service life cylinder
CMK2	
SCM	
SSD2	
MDC2	
MSD	
MSDG-L	
SMG	
LCR	
LCG	
STM	Environment-resistant cylinder
STG	
STR2	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
SMG	
LCR	
STG	Linear Slide Hand
STS	
STL	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	
LSHL-F	
LSHM-A	
LSHM-G	Low-profile long stroke hand
LSHM-F	
LST	
LSTM	
ABP2	
SCPD3	
CMK2	
SCM	
SSD2	
MSD	
MSDG-L	Compatible with rechargeable batteries
SMG	
STG	
STM	
LCR	
LCG	
STR2	
LSH-A	
LSH-G	
LSH-F	
LSHL-A	
LSHL-G	Supports food processing
LSHL-F	
SCPD3	
CMK2	
SCM	
SCG	
SSD2	
STG	

Compact cylinder Guided cylinder Rodless cylinder Compact cylinder Twin rod cylinder Linear slide cylinder
Standard model

SSD2 Series **STG** Series **SRL3** Series **SMG** Series **STR2** Series **LCR** Series

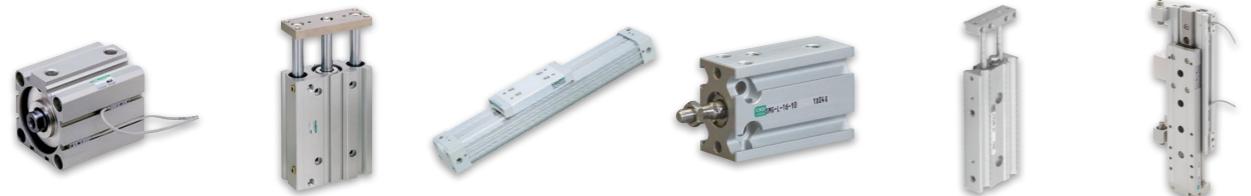


Table rotary actuator Linear Slide Hand Parallel hand Compact wide parallel hand Ultra thin parallel hand

GRC Series **LSH** Series **LHAG** Series **HMF** Series **HLD** Series



Precise suction plate Fine buffer Air bearing actuator Cylinder switch Pilot operated 3, 5-port valve Direct acting 3-port valve

PVP Series **FBU2** Series **LBC** Series **4G** Series **3QR** Series



Electric actuator Electric actuator

EBS-L/G, EBR-L/G, EKS-L Series **ETS/ECS** Series



Suction pad Vacuum ejector Vacuum filter Vacuum regulator

VSP Series **VSX/VSXM** Series **VSFU** Series **VRA2000** Series



Super heatless dryer High polymer membrane air dryer Super dryer (High polymer membrane air dryer) Nitrogen Gas Extraction Unit Medium main line filter Air filter

SHD Series **SU** Series **SD** Series **NS** Series **AF2** Series **F3000** Series



Precision regulator Electro-pneumatic regulator Pressure gauge Digital pressure sensor Compact flow rate sensor Residual pressure exhaust valve with spool position detection

RP/RPE Series **EVD/EVR** Series **G40D/G41D/G49D/G50D** Series **PPX** Series **FSM3** Series **SNS** Series



Speed controller with adjusting dial Speed controller, elbow Fitting, tube 2, 3-port solenoid valve for dry air

DSC Series **SC3F** Series **AB/ADK-Z** Series



Valve for high vacuum Air operated valve for chemical liquids Clean cylinder valve Air operated ball valve Diaphragm cylinder valve


AVB Series **AMD** Series **LAD** Series **CHB/CHG** Series **NAD** Series



Compatible with more than 100 models
A line-up that can contribute to the evolving rechargeable battery manufacturing process

Prevents food contamination by lubricants. Food-grade (NSF H1) lubricants are used.

FP1

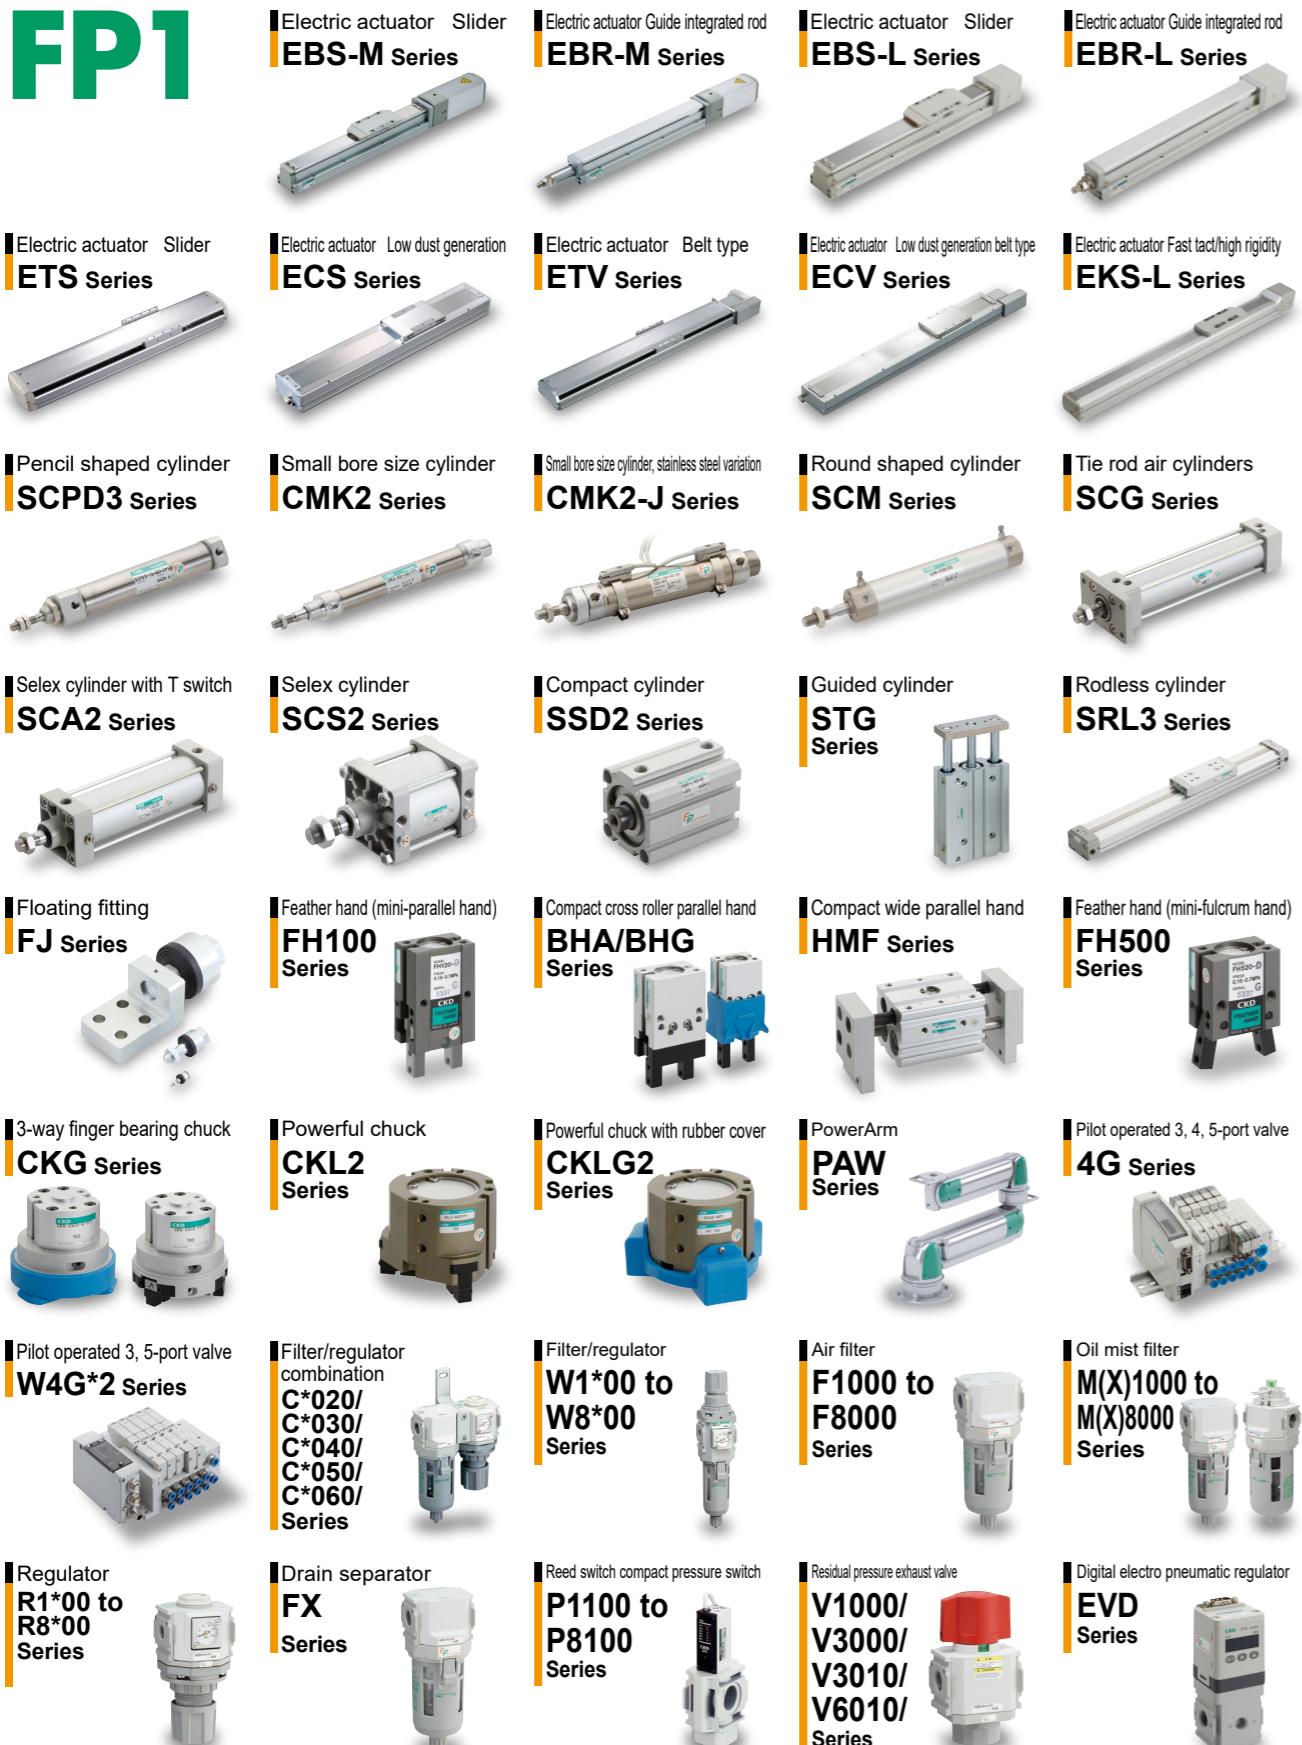

Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**




Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



FP1

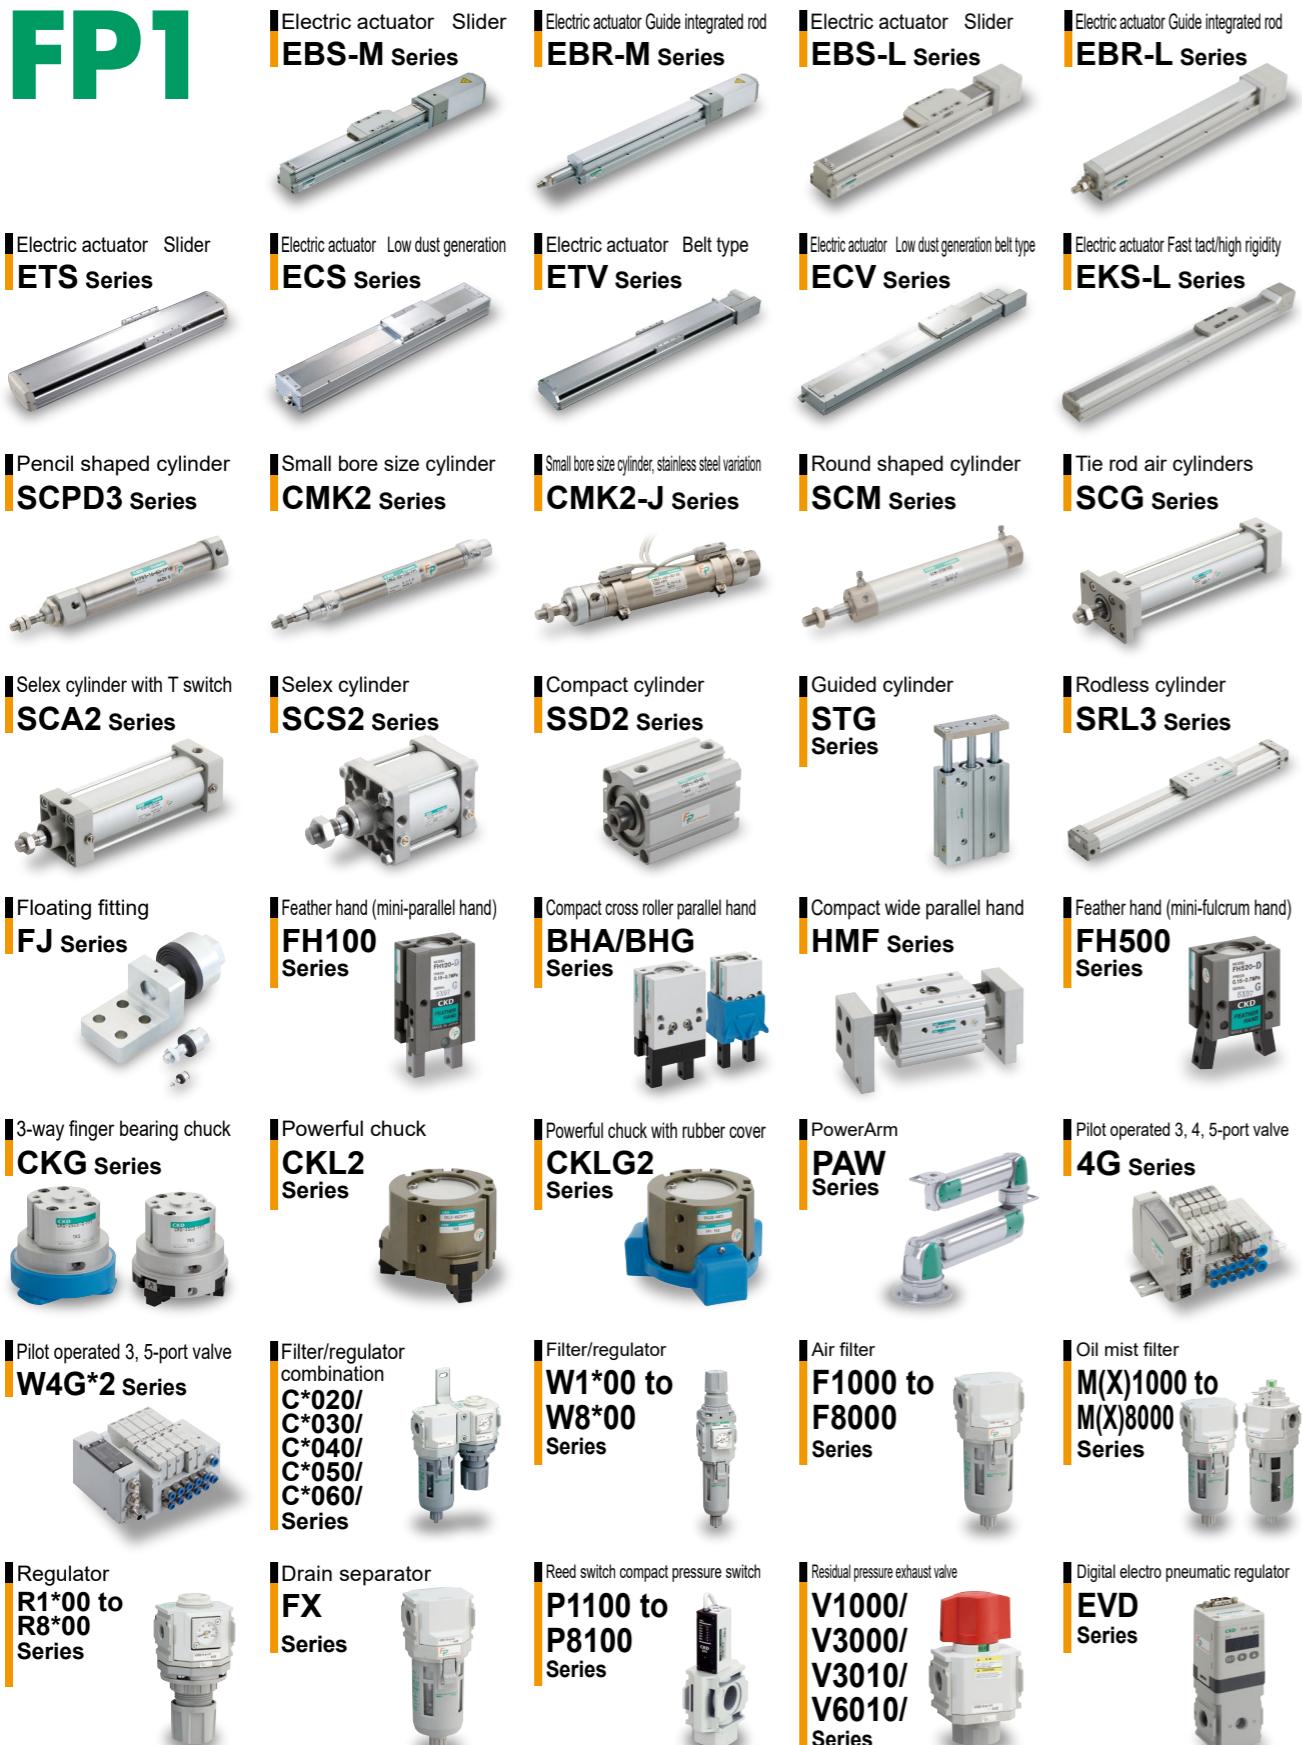

Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**



Fitting GW Series



Fitting (stainless steel Series) ZW Series



Speed controller Elbow with push-in fitting **SC3W Series**



Speed controller with adjusting dial **DSC Series**



Speed controller line type with push-in fitting **SCL2 Series**





CKD Corporation

Website <https://www.ckd.co.jp/en/>

ASIA

喜開理(上海)機器有限公司

CKD(SHANGHAI) CORPORATION

- 営業部(上海浦西事務所)SALES HEADQUARTERS / SHANGHAI PUXI OFFICE
Room 601, 6th Floor, Yuanzhongkeyan Building, No. 1905 Hongmei Road, Xinhui District, Shanghai 200233, China
PHONE +86-21-61911884 FAX +86-21-60905356
- 上海浦東事務所(SHANGHAI PUDONG OFFICE)
- 寧波事務所(NINGBO OFFICE)
- 杭州事務所(HANGZHOU OFFICE)
- 無錫事務所(WUXI OFFICE)
- 昆山事務所(KUNSHAN OFFICE)
- 蘇州事務所(SUZHOU OFFICE)
- 南京事務所(NANJING OFFICE)
- 合肥事務所(HEFEI OFFICE)
- 成都事務所(CHENGDU OFFICE)
- 武漢事務所(WUHAN OFFICE)
- 鄭州事務所(ZHENGZHOU OFFICE)
- 長沙事務所(CHANGSHA OFFICE)
- 重慶事務所(CHONGQING OFFICE)
- 西安事務所(XIAN OFFICE)
- 廣州事務所(GUANGZHOU OFFICE)
- 中山事務所(ZHONGSHAN OFFICE)
- 深圳西事務所(WEST SHENZHEN OFFICE)
- 深圳東事務所(EAST SHENZHEN OFFICE)
- 東莞事務所(DONGGUAN OFFICE)
- 厦門事務所(XIAMEN OFFICE)
- 福州事務所(FUZHOU OFFICE)
- 漳陽事務所(SHENYANG OFFICE)
- 大連事務所(DALIAN OFFICE)
- 長春事務所(CHANGCHUN OFFICE)
- 北京事務所(BEIJING OFFICE)
- 天津事務所(TIANJIN OFFICE)
- 青島事務所(QINGDAO OFFICE)
- 潍坊事務所(WEIFANG OFFICE)
- 济南事務所(JINAN OFFICE)
- 烟台事務所(YANTAI OFFICE)

CKD INDIA PRIVATE LTD.

- HEADQUARTERS
Unit No. 607, 6th Floor, Welldone Tech Park, Sector 48, Sohna Road, Gurgaon-122018, Haryana, India
PHONE +91-124-418-8212
- BANGALORE OFFICE
- PUNE OFFICE

Revision details: P4-HP1 Series,
Added FP1-G-HP1 Series

□ 2-250 Oiji, Komaki City, Aichi 485-8551, Japan

□ PHONE +81-568-74-1338 FAX +81-568-77-3461

PT CKD TRADING INDONESIA

- HEAD OFFICE
Menara Bidakara 2, 18th Floor, Jl. Jend. Gatot Subroto Kav. 71-73, Pancoran, Jakarta 12870, Indonesia
PHONE +62-21-2938-6601 FAX +62-21-2906-9470
- MEDAN OFFICE
- BEKASI OFFICE
- KARAWANG OFFICE
- SEMARANG OFFICE
- SURABAYA OFFICE

CKD KOREA CORPORATION

- HEADQUARTERS
(3rd Floor), 44, Sinsu-ro, Mapo-gu, Seoul 04088, Korea
PHONE +82-2-783-5201~5203 FAX +82-2-783-5204
- 水原營業所(SUWON OFFICE)
- 天安營業所(CHEONAN OFFICE)
- 蔚山營業所(ULSAN OFFICE)

M-CKD PRECISION SDN.BHD.

- HEAD OFFICE
Lot No.6,Jalan Modal 23/2, Seksyen 23, Kawasan MIEL, Fasa 8, 40300 Shah Alam,Selangor Darul Ehsan, Malaysia
PHONE +60-3-5541-1468 FAX +60-3-5541-1533
- JOHOR BAHRU BRANCH OFFICE
- PENANG BRANCH OFFICE

CKD SINGAPORE PTE. LTD.

- No.33 Tannery Lane #04-01 Hoesteel Industrial Building, Singapore 347789, Singapore
PHONE +65-67442623 FAX +65-67442486
- CKD CORPORATION BRANCH OFFICE**
No.33 Tannery Lane #04-01 Hoesteel Industrial Building, Singapore 347789, Singapore
PHONE +65-67447260 FAX +65-68421022

CKD THAI CORPORATION LTD.

- HEADQUARTERS
19th Floor, Smooth Life Tower, 44 North Sathorn Road, Silom, Bangkok, Bangkok 10500, Thailand
PHONE +66-2-267-6300 FAX +66-2-267-6304-5
- NAVANAKORN OFFICE
- EASTERN SEABOARD OFFICE
- LAMPHUN OFFICE
- KORAT OFFICE
- AMATANAKORN OFFICE
- PRACHINBURI OFFICE
- SARABURI OFFICE

台灣喜開理股份有限公司

TAIWAN CKD CORPORATION

- HEADQUARTERS
16F-3, No. 7, Sec. 3, New Taipei Blvd., Xinzhuang Dist., New Taipei City 242, Taiwan
PHONE +886-2-8522-8198 FAX +886-2-8522-8128
- 新竹營業所(HSINCHU OFFICE)
- 台中營業所(TAICHUNG OFFICE)
- 台南營業所(TAINAN OFFICE)
- 高雄營業所(KAOHSIUNG OFFICE)

CKD VIETNAM ENGINEERING CO.,LTD.

- HEADQUARTERS
18th Floor, CMC Tower, Duy Tan Street, Cau Giay District, Hanoi, Vietnam
PHONE +84-24-3795-7631 FAX +84-24-3795-7637
- HO CHI MINH OFFICE

EUROPE

CKD EUROPE B.V.

- HEADQUARTERS
Beechavenue 125A, 1119 RB Schiphol-Rijk, the Netherlands
PHONE +31-23-554-1490
- CKD EUROPE GERMANY OFFICE
- CKD EUROPE UK
- CKD EUROPE CZECH O.Z.

CKD CORPORATION EUROPE BRANCH

- Beechavenue 125A, 1119 RB Schiphol-Rijk, the Netherlands
PHONE +31-23-554-1490

NORTH AMERICA & LATIN AMERICA

CKD MEXICO, S. DE R.L. DE C.V.

- Cerrada la Noria No. 200 Int. A-01, Querétaro Park II, Parque Industrial Querétaro, Santa Rosa Jáuregui, Querétaro, C.P. 76220, México
PHONE +52-442-161-0624

CKD USA CORPORATION

- HEADQUARTERS
1605 Penny Lane, Schaumburg, IL 60173, USA
PHONE +1-847-648-4400 FAX +1-847-565-4923
- LEXINGTON OFFICE
- SAN ANTONIO OFFICE
- SAN JOSE OFFICE/ TECHNICAL CENTER
- DETROIT OFFICE
- BOSTON OFFICE

The goods and/or their replicas, the technology and/or software found in this catalog are subject to complementary export regulations by Foreign Exchange and Foreign Trade Law of Japan.

If the goods and/or their replicas, the technology and/or software found in this catalog are to be exported from Japan, Japanese laws require the exporter makes sure that they will never be used for the development and/or manufacture of weapons for mass destruction.